

SPECIFICATION CONTROL DRAWING


55PC1152

TITLE FIVE CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT

Date 06-13-00

Revision A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

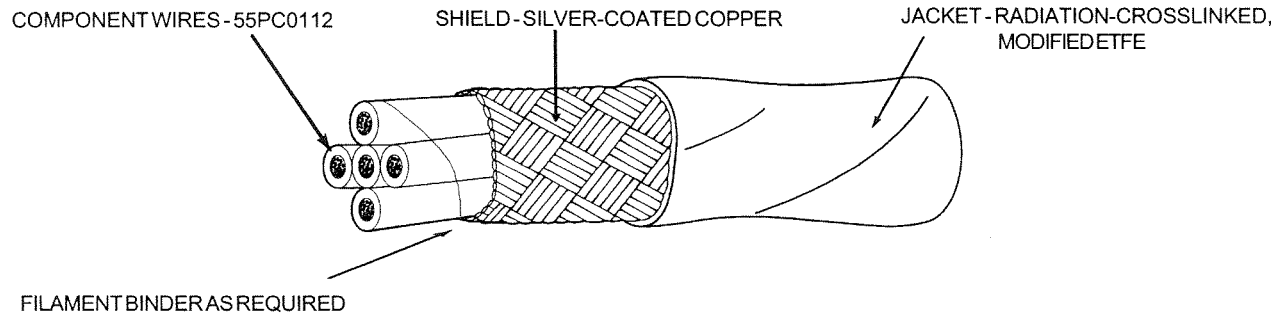

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC1152-24-*	24	38	.0060	.0080	.120	.133	.145	17.36	18.03
55PC1152-22-*	22	38	.0060	.0080	.136	.150	.163	23.08	23.84
55PC1152-20-*	20	38	.0065	.0085	.158	.173	.188	32.14	33.09
55PC1152-18-*	18	38	.0065	.0085	.183	.200	.217	45.04	46.20
55PC1152-16-*	16	38	.0070	.0090	.202	.222	.241	55.72	57.17
55PC1152-14-*	14	38	.0075	.0095	.244	.265	.285	81.33	83.20
55PC1152-12-*	12	36	.0080	.0100	.298	.324	.349	124.41	126.93

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts (rms), 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

SHIELD COVERAGE: 85% (minimum)
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:
 The "*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.
 Example: AWG 22, red, blue, yellow, green and black component wires; white jacket: 55PC1152-22-2/6/4/5/0-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.