

63306-1 ✓ ACTIVE

FASTON | FASTON 250


TE Internal #: 63306-1

Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm<sup>2</sup> Wire Size, 1624 – 4107 CMA Wire Size, FASTON 250

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects

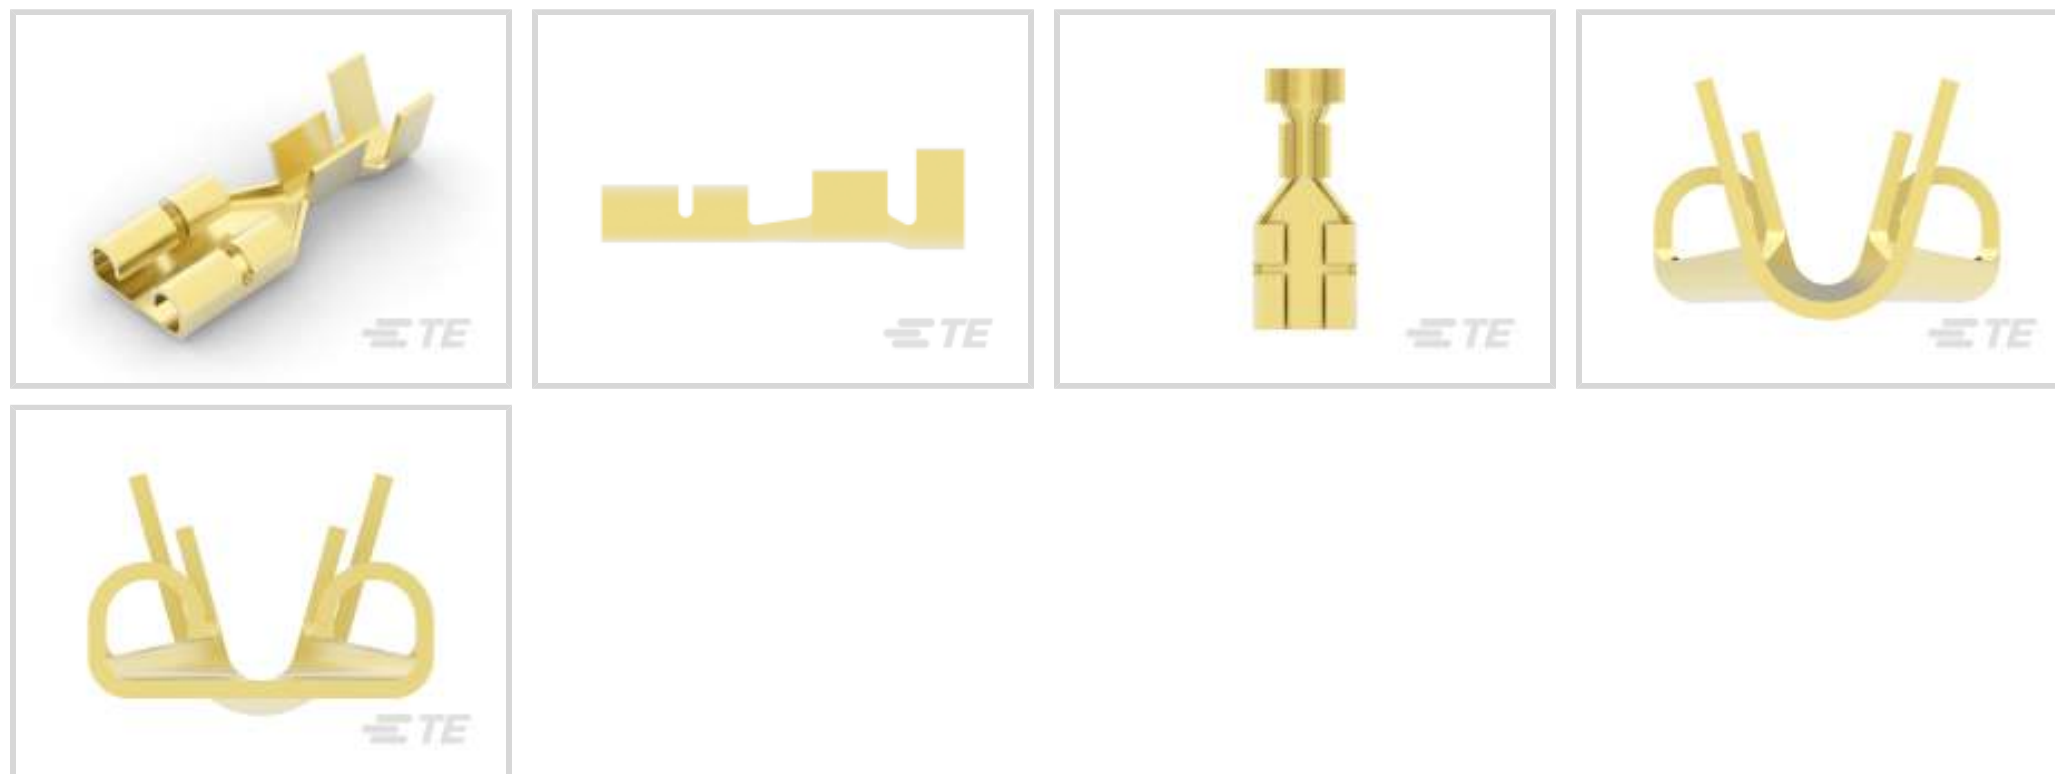

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **1624 – 4107 CMA**

Mating Tab Width: **6.35 mm [ .25 in ]**

## Features

### Product Type Features

Insertion Force	Low
-----------------	-----

### Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

### Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Unplated
Crimp Type	F-Crimp
Barrel Type	Open

### Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

### Mechanical Attachment



Wire Insulation Support	With
Mating Retention Type	Dimple

### Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Product Length	19.18 mm[.755 in]
Compatible Insulation Diameter Range	3.1 – 4.3 mm[.12 – .17 in]
Wire Size	1624 – 4107 CMA

### Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

### Industry Standards

Agency/Standard	CSA, UL
-----------------	---------

### Packaging Features

Packaging Quantity	10000
Packaging Method	Strip/Reel

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

















EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability
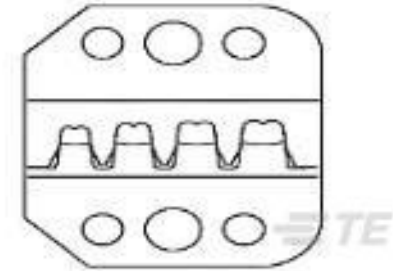
#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products






will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts


 <p>TE Part # 58524-1 PROCRIMPER TOOL &amp; DIE</p>	 <p>TE Part # 42845-1 250 FASTON REC 18-14 AWG BR</p>	 <p>TE Part # 154509-2 250 FASTON HSG.,REC.,1 POS, NATRUAL</p>	 <p>TE Part # 1-521785-1 250 FASTON HSG.,REC.,2 POS, NATRUAL</p>
 <p>TE Part # 314917-1 EXT TL 250 U-POD STR IS9726</p>	 <p>TE Part # 5-154509-4 250 FASTON HSG. REC 1P BLACK</p>	 <p>TE Part # 154509-4 250 FASTON HSG.,REC.,1 POS, NATRUAL</p>	 <p>TE Part # 58524-2 PROCRIMPER DIE</p>
 <p>TE Part # 2-2150016-1 OCEAN_2.0_Applicator-E-100F180F</p>	 <p>TE Part # 2-2150016-2 OCEAN_2.0_Applicator-E-100F180F</p>	 <p>TE Part # 2150016-1 OCEAN_2.0_Applicator-E-100F180F</p>	 <p>TE Part # 2150016-2 OCEAN_2.0_Applicator-E-100F180F</p>
 <p>TE Part # 346697-3 250 FASTON,REC.,20-16 AWG,PB</p>	 <p>TE Part # 7-2150016-1 OCEAN_2.0_Applicator-E-100F180F</p>	 <p>TE Part # 7-2150016-2 OCEAN_2.0_Applicator-E-100F180F</p>	 <p>TE Part # 7-2150016-7 OCEAN_2.0_SPARE_PART_KIT- 100F180F</p>



## Also in the Series | FASTON 250

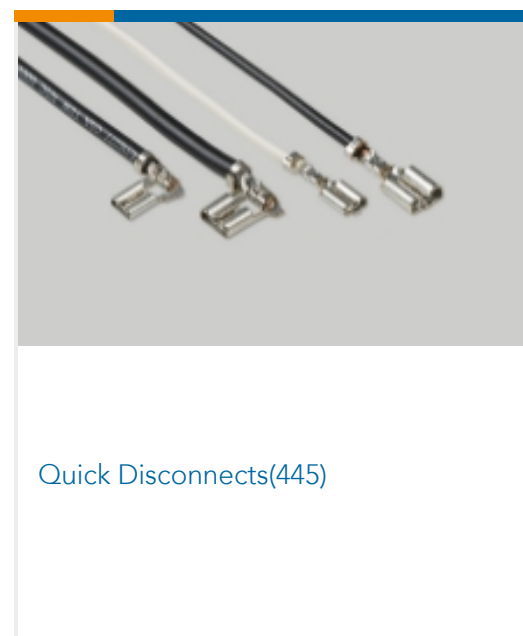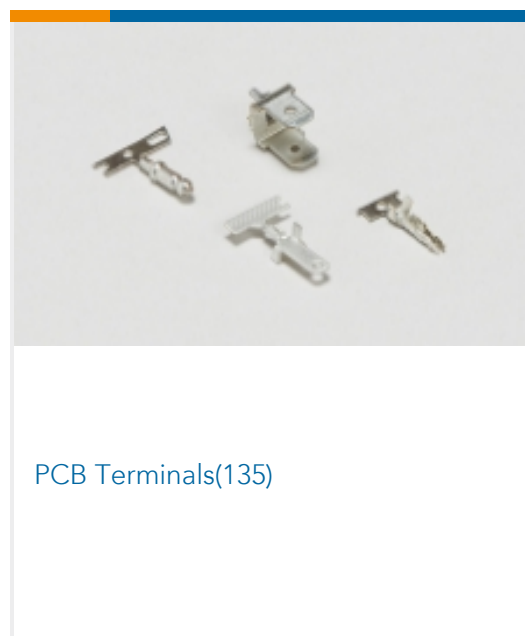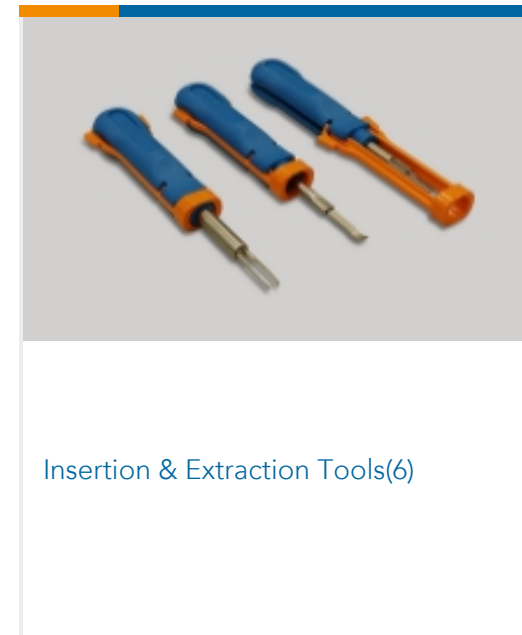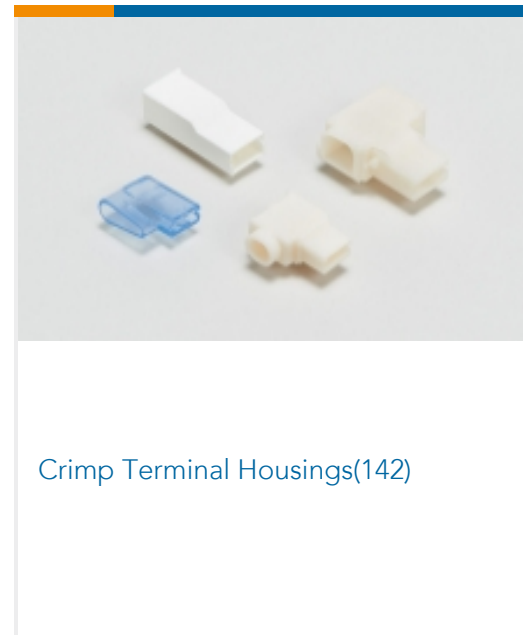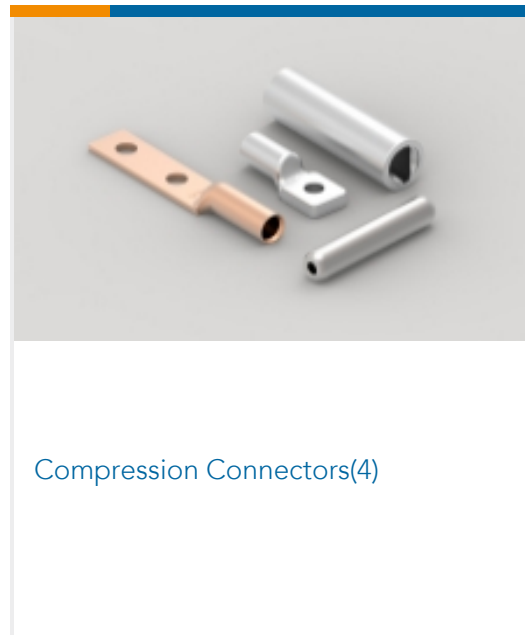


## Customers Also Bought

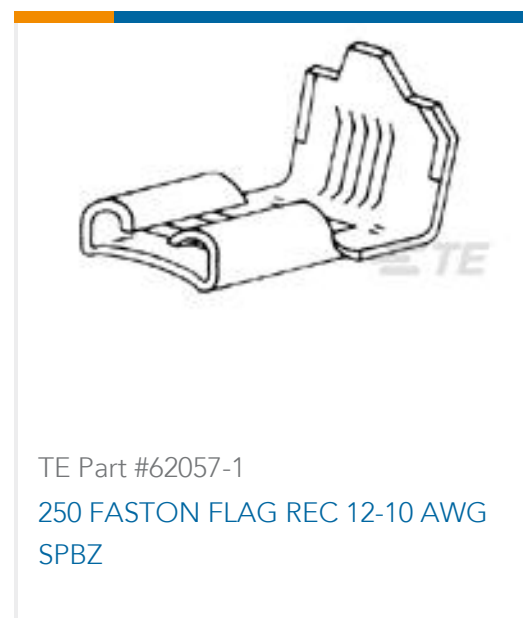



TE Part #456135-6  
CRIMPER, INSULATION "O"(.140")



TE Part #1-521204-7  
HSG, POS LOCK, .250 SERIES, 2  
POSITION

## Documents

### Product Drawings

#### 250 FASTON REC 18-14 AWG BR

English

### CAD Files

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_63306-1\\_BC.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_63306-1\\_BC.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_63306-1\\_BC.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

#### 82004 FASTON Terminals (Insulated and Uninsulated) Catalog - FASTON Receptacles Section

English

### Product Specifications

#### Application Specification

English

### Product Environmental Compliance

#### TE Material Declaration

English

### Agency Approvals

#### UL Report

English