


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
H	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		EH02-0004-02	29 JAN 02	RC	RM
		O		EH-0558-97	30 MAY 97	AM	DS
		-	-	-	-	-	-

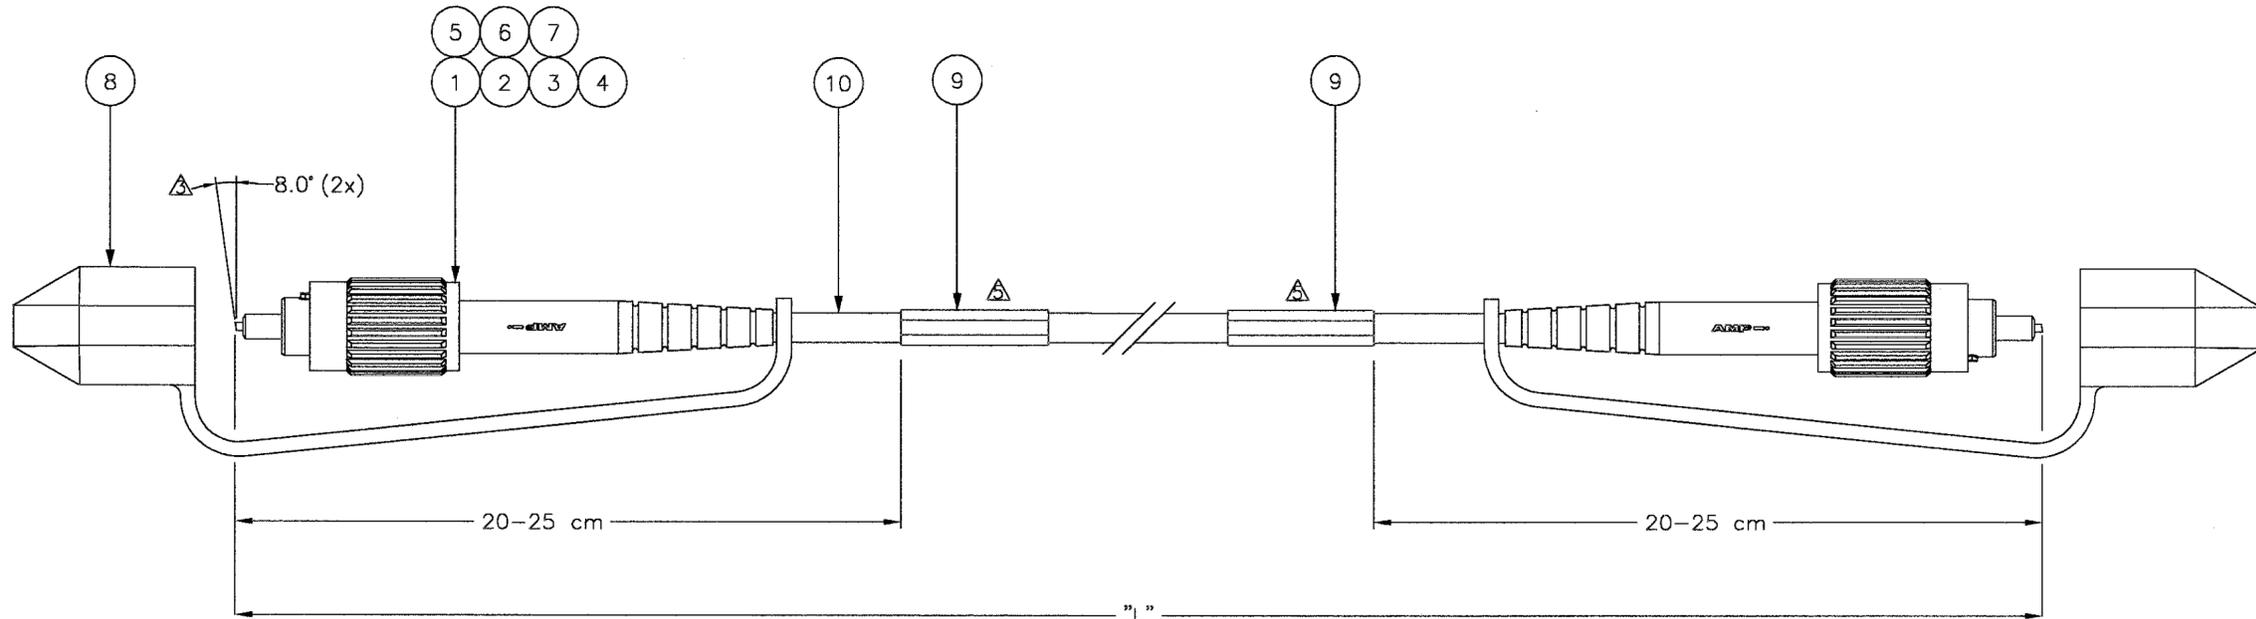

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (METER)
X-0233888-Y	XY,0

NOTES:

- INSERTION LOSS $\leq 0,5$ dB, MEASURED AGAINST REF. CONNECTOR.
- RETURN LOSS ≥ 65 dB, MATED
- APC ANGLE = 8°
- CABLE:
 - 9/125 μ m
 - DIAMETER: 3,0 mm
 - COLOUR: YELLOW
 - TIGHT BUFFER
 - OUTER SHEATH MATERIAL: PVC
- INFO ON CABLE LABEL:
 - TYCO PART NUMBER
 - P.O. NUMBER AND PROD. DATE (FORMAT YYWW)

EXAMPLE: TYCO 0-0233888-2
0-1234-5 0204

L	Part Number	Description	Item
10	-	CABLE ϕ 3,0 mm	10
9	-	CABLE LABEL	9
8	-	CAP, PROTECTIVE, BLACK	8
7	-	BOOT, GREEN	7
6	-	CRIMP EYELET OPTIMATE 3,0mm	6
5	-	INTERNAL BODY, 3,0 mm	5
4	-	SPRING COMPRESSION 3,0 mm	4
3	-	FERR. SUBASSY	3
2	-	PLUG BODY, PRECISION KEYING	2
1	-	COUPLING NUT	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: R.COOLEN 29 JAN 02	Tyco Electronics Corporation 's-Hertogenbosch Nederland
CHK: R.MAARTENS 29 JAN 02	
APVD: R.MAARTENS 29 JAN 02	
PRODUCT SPEC	
APPLICATION SPEC	NAME: FOSM LEAD 3,0 FC/APC - FC/APC
WEIGHT	SIZE: A2 CAGE CODE: 00779 DRAWING NO: C=233888 RESTRICTED TO: -
CUSTOMER DRAWING	SCALE: -:- SHEET 1 OF 1 REV A