

### QFX-QSFP-DACBO-2M-C

### Juniper® Compatible 40Gb/s 4SFP+ Direct Attach Cable Copper, Passive, 2m

### **FEATURES**

- Compliant with SFF- 8436, SFF-8431, SFF-8432 and SFF-8472
- Up to 10. 3125Gbps data rate per channel
- Up to 7m transmission
- Operating temperature: 0°C to +70°C
- Single 3.3V power supply
- RoHS compliant
- Cost-effective copper solution
- Lowest total system power solution
- Lowest total system EMI solution
- Optimized design for Signal Integrity

### **APPLICATIONS**

#### Data

- Servers
- Networked storage systems
- Routers
- External storage systems
- Data Center networking

#### Communications

- Switches
- Routers

#### **INDUSTRIAL STANDARDS**

- InfiniBand Trade Association (IBTA)
- IEEE802.3ba
- 40Gigabit Ethernet (40G BASE CR4)



#### DESCRIPTION

ATGBICS QSFP+ (Quad Small Form-factor Pluggable Plus) copper direct-attach cables are suitable for very short distances and offer a highly cost-effective way to establish a 40-Gigabit link between QSFP+ ports of QSFP+ switches within racks and across adjacent racks. These cables are used for 40GbE and Infiniband standards, to maximize performance. QSFP+ are designed to meet emerging data center and high-performance computing application needs for a high-density cabling interconnect system capable of delivering an aggregate data bandwidth of 40Gb/s. This interconnect system is fully compliant with existing industry standard specifications such as the QSFP MSA and IBTA (InfiniBand Trade Association). The QSFP+ cables support the bandwidth transmission requirements as defined by IEEE 802.3ba (40 Gb/s) and Infiniband QDR (4x10 Gb/s per channel) specifications.




#### **QSFP+ Pin Function Definition**

| Pin      | Logic          | Symbol         | Description                         |  |
|----------|----------------|----------------|-------------------------------------|--|
| 1        |                | GND            | Ground                              |  |
| 2        | CML-I          | Tx2n           | Transmitter Inverted Data Input     |  |
| 3        | CML-I          | Tx2p           | Transmitter Non-Inverted Data Input |  |
| 4        |                | GND            | Ground                              |  |
| 5        | CML-I          | Tx4n           | Transmitter Inverted Data Input     |  |
| 6        | CML-I          | Tx4p           | Transmitter Non-Inverted Data Input |  |
| 7        |                | GND            | Ground                              |  |
| 8        | LVTTL-I        | ModSelL        | Module Select                       |  |
| 9        | LVTTL-I        | ResetL         | Module Reset                        |  |
| 10       |                | Vcc Rx         | +3.3V Power Supply Receiver         |  |
| 11       | LVCMOS-<br>I/O | SCL            | 2-wire serial interface clock       |  |
| 12       | LVCMOS-<br>I/O | SDA            | 2-wire serial interface data        |  |
| 13       |                | GND            | Ground                              |  |
| 14       | CML-O          | Rx3p           | Receiver Non-Inverted Data Output   |  |
| 15       | CML-O          | Rx3n           | Receiver Inverted Data Output       |  |
| 16       |                | GND            | Ground                              |  |
| 17       | CML-O          | Rx1p           | Receiver Non-Inverted Data Output   |  |
| 18       | CML-O          | Rx1n           | Receiver Inverted Data Output       |  |
| 19       |                | GND            | Ground                              |  |
| 20       |                | GND            | Ground                              |  |
| 21       | CML-O          | Rx2n           | Receiver Inverted Data Output       |  |
| 22       | CML-O          | Rx2p           | Receiver Non-Inverted Data Output   |  |
| 23       |                | GND            | Ground                              |  |
| 24       | CML-O          | Rx4n           | Receiver Inverted Data Output       |  |
| 25       | CML-O          | Rx4p           | Receiver Non-Inverted Data Output   |  |
| 26<br>27 | LVTTL-O        | GND<br>ModPrsL | Ground<br>Module Present            |  |
| 27       | LVTTL-O        | IntL           | Interrupt                           |  |
| 20       |                |                | -                                   |  |
| 30       |                | Vcc 1x<br>Vcc1 | +3.3V Power supply transmitter      |  |
| 30       |                | VCCT           | +3.3V Power supply                  |  |



| 31 | LVTTL-I | LPMode | Low Power Mode                      |
|----|---------|--------|-------------------------------------|
| 32 |         | GND    | Ground                              |
| 33 | CML-I   | Тх3р   | Transmitter Non-Inverted Data Input |
| 34 | CML-I   | Tx3n   | Transmitter Inverted Data Input     |
| 35 |         | GND    | Ground                              |
| 36 | CML-I   | Tx1p   | Transmitter Non-Inverted Data Input |
| 37 | CML-I   | Tx1n   | Transmitter Inverted Data Input     |
| 38 |         | GND    | Ground                              |

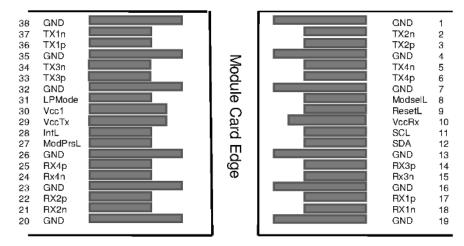


Top Side Viewed From Top Bottom Side Viewed From Bottom



### **SFP+ Pin Function Definition**

| Pin | Logic     | Symbol     | Description   |  |
|-----|-----------|------------|---|--|
| 1   |           | VeeT       | Module Transmitter Ground   |  |
| 2   | LVTTL-O   | Tx_Fault   | Module Transmitter Fault  |  |
| 3   | LVTTL-I   | Tx_Disable | Transmitter disable; Turns off transmitter laser output   |  |
| 4   | LVTTL-I/O | SDA        | 2-wire Serial Interface Data Line (Same as MOD-DEF2 in INF-<br>8074i)                                       |  |
| 5   | LVTTL-I/O | SCL        | 2-wire Serial Interface Clock (Same as MOD-DEF1 in INF-8074i)   |  |
| 6   |           | Mod_ABS    | Module Absent, connected to VeeT or VeeR in the module  |  |
| 7   | LVTTL-I   | RS0        | Rate Select 0, optionally controls SFP+ module receiver   |  |
| 8   | LVTTL-O   | Rx_LOS     | Receiver Loss of Signal Indication (In FC designated as Rx_LOS and in Ethernet designated as Signal Detect) |  |
| 9   | LVTTL-I   | RS1        | Rate Select 1, optionally controls SFP+ module transmitter  |  |
| 10  |           | VeeR       | Module Receiver Ground  |  |
| 11  |           | VeeR       | Module Receiver Ground  |  |
| 12  | CML-O     | RD-        | Receiver Inverted Data Output   |  |
| 13  | CML-O     | RD+        | Receiver Non-Inverted Data Output   |  |
| 14  |           | VeeR       | Module Receiver Ground  |  |
| 15  |           | VccR       | Module Receiver 3.3 V Supply  |  |
| 16  |           | VccT       | Module Transmitter 3.3 V Supply   |  |
| 17  |           | VeeT       | Module Transmitter Ground   |  |
| 18  | CML-I     | TD+        | Transmitter Non-Inverted Data Input   |  |
| 19  | CML-I     | TD-        | Transmitter Inverted Data Input   |  |
| 20  |           | VeeT       | Module Transmitter Ground   |  |

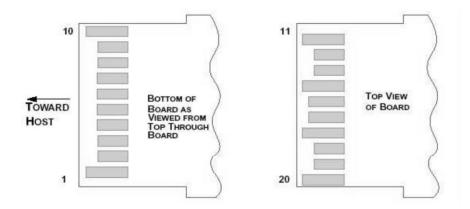



#### **General Product Characteristics**

| Q/4SFP+ DAC Specifications |   |
|----------------------------|---|
| Number of Lanes            | Tx & Rx   |
| Channel Data Rate          | 10.3125 Gbps  |
| Operating Temperature      | 0 to + 70°C   |
| Storage Temperature        | -40 to + 85°C   |
| Supply Voltage             | 3.3 V nominal   |
| Electrical Interface       | 38 pins edge connector (QSFP+)<br>20 pins edge connector (SFP+) |
| Management Interface       | Serial, I2C   |

### **High Speed Characteristics**

| Parameter   | Symbol         | Min    | Typical | Max   | Unit                | Note               |
|---|----------------|--------|---------|-------|---------------------|--------------------|
| Differential Impedance                            | TDR            | 90     | 100     | 110   | Ώ                   |                    |
| Insertion loss                                    | SDD21          | -17.04 |         |       | dB                  | At 5.15625 GHz     |
| Differential Return Loss                          | SDD11<br>SDD22 |        |         | See 1 | dB                  | At 0.05 to 4.1 GHz |
| Dinerential Neturn 1033                           |                |        |         | See 2 | dB                  | At 4.1 to 11.1 GHz |
| Differential to common mode<br>return loss        | SCD11<br>SCD22 |        |         | -10   | dB                  | At 0.2 to 11.1 GHz |
| Common-mode to common-<br>mode output return loss | SCC11<br>SCC22 | -3     |         | dB    | At 0.01 to 11.1 GHz |                    |


#### Notes:

- 1. Reflection Coefficient given by equation SDD11(dB) < -12 + 2 × SQRT(f), with f in GHz
- 2. Reflection Coefficient given by equation SDD11(dB) < -6.3 + 13 × log10(f/5.5), with f in GHz



### **Mechanical Information**

The connector is compatible with the SFF-8436 to SFF-8432 specification

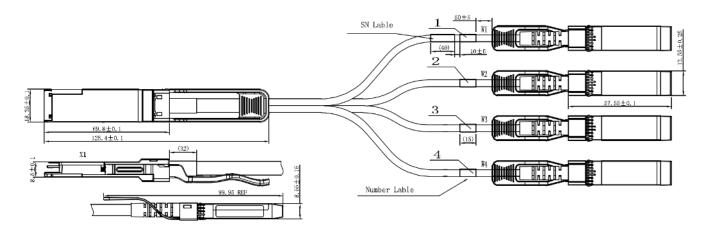

| Length (m) | Cable AWG |
|------------|-----------|
| 1          | 30        |
| 3          | 30        |
| 5          | 26        |
| 7          | 24        |

### **Regulatory Compliance**

| Feature  | Test Method   | Performance   |  |
|--|---|---|--|
| Electrostatic Discharge<br>(ESD) to the Electrical<br>Pins | MIL-STD-883C Method 3015.7  | Class 1(>2000 Volts)  |  |
| Electromagnetic  | FCC Class B   | Compliant with<br>Standards   |  |
| Interference (EMI)   | CENELEC EN55022 Class B   |   |  |
|  | CISPR22 ITE Class B   |   |  |
| RF Immunity (RFI)  | IEC61000-4-3  | Typically Show no Measurable<br>Effect from a 10V/m Field<br>Swept from 80 to 1000MHz |  |
| RoHS Compliance  | RoHS Directive 2011/65/EU and it's<br>Amendment Directives (EU)<br>2015/863 | RoHS (EU) 2015/863 compliant  |  |
| REACH Compliance   | REACH Regulation (EC) No 1907/2006  | REACH (EC) No 1907/2006<br>compliant  |  |



### **AWG Information**

| Reach @ 10Gb/s (m) | AWG   |
|--------------------|-------|
| 0.5                | 30    |
| 1                  | 30    |
| 2                  | 30    |
| 3                  | 28/30 |
| 4                  | 28    |
| 5                  | 24    |
| 7                  | 24    |