

## DIN□48 Size Electronic Counter LC4H-W



# LC4H-W DIN□48 Size Electronic Counter




11-pin type

Screw terminal type

## Features

- **Two-stage presetting (upper and lower limits)**

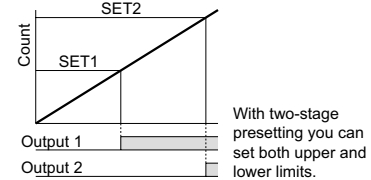

- **Bright and easy-to-read display**  
2-color backlight LCD display
- **Simple operation**  
Seesaw buttons
- **Short body of only 70.1 mm 2.760 in (Pin type) or 64.5 mm 2.539 in (Screw type)**
- **IP66 compliant for resistance against negative environmental influences (only when panel surface uses rubber packing)**

IP66 Mode selectable DIN□48

## Electronic counters with two-step preset function

### PRODUCT TYPES

| Digit | Count speed                   | Output mode  |  | Output                                     | Operating voltage | Power down insurance | Terminal type  | Model No.         |
|-------|-------------------------------|--|--|--|-------------------|----------------------|----------------|-------------------|
|       |                               | Output 1   | Output 2   |  |                   |                      |                |                   |
| 6     | 30 Hz/<br>5 kHz<br>switchable | <ul style="list-style-type: none"> <li>• Maintain output/over count I</li> <li>• Maintain output/over count II</li> <li>• Maintain output/over count III</li> <li>• One shot/over count (4 modes)</li> </ul> | <ul style="list-style-type: none"> <li>• Maintain output/hold count</li> <li>• Maintain output/over count I</li> <li>• Maintain output/over count II</li> <li>• Maintain output/over count III</li> <li>• One shot/over count</li> <li>• One shot/recount I</li> <li>• One shot/recount II</li> <li>• One shot/hold count (8 modes)</li> </ul> | Relay output<br>(1 Form a + 1 Form a)      | 100 to 240 V AC   | Available            | 11 pins        | LC4H-W-R6-AC240V  |
|       |                               |  |  |  | 24 V AC           |                      | Screw terminal | LC4H-W-R6-AC240VS |
|       |                               |  |  |  | 12 to 24 V DC     |                      | 11 pins        | LC4H-W-R6-AC24V   |
|       |                               |  |  |  |                   |                      | Screw terminal | LC4H-W-R6-AC24VS  |
|       |                               |  |  |  |                   |                      | 11 pins        | LC4H-W-R6-DC24V   |
|       |                               |  |  |  |                   |                      | Screw terminal | LC4H-W-R6-DC24VS  |
|       |                               |  |  | Transistor output<br>(1 Form a + 1 Form a) | 100 to 240 V AC   |                      | 11 pins        | LC4H-W-T6-AC240V  |
|       |                               |  |  |  | 24 V AC           |                      | Screw terminal | LC4H-W-T6-AC240VS |
|       |                               |  |  |  |                   |                      | 11 pins        | LC4H-W-T6-AC24V   |
|       |                               |  |  |  |                   |                      | Screw terminal | LC4H-W-T6-AC24VS  |
|       |                               |  |  |  | 12 to 24 V DC     |                      | 11 pins        | LC4H-W-T6-DC24V   |
|       |                               |  |  |  |                   |                      | Screw terminal | LC4H-W-T6-DC24VS  |

\* A rubber gasket (ATC18002) and a mounting frame (AT8-DA4) are included.

## Disclaimer

The applications described in the catalog are all intended for examples only. The purchase of our products described in the catalog shall not be regarded as granting of a license to use our products in the described applications. We do NOT warrant that we have obtained some intellectual properties, such as patent rights, with respect to such applications, or that the described applications may not infringe any intellectual property rights, such as patent rights, of a third party.

**Panasonic**  
INDUSTRY

**Panasonic Industry Co., Ltd.**

Industrial Device Business Division  
7-1-1, Morofuku, Daito-shi, Osaka 574-0044, Japan  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)