

Description: 1608 5GNR-n77 Band Pass Filter

PART NUMBER: BPF1608LRPFR3750L

Features:

- Compact size : 1.6x0.8x0.35mm
- RoHS compliant

Applications:

- WWAN
- 5GNR n77

ELECTRICAL SPECIFICATIONS

Item	Frequency Range(MHz)	Min.	Typ.	Max.
Insertion Loss (dB)	3300~4200	-	1.73	2.0
Insertion Loss (dB) at -40~85°C	3300~4200	-	-	2.5
Return Loss (dB)	3300~4200	14	19.49	-
Attenuation (dB)	100~2570	30	39.37	-
	2620~2690	25	41.91	-
	5150~5925	15	20.31	-
	6600~8400	25	40.61	-
	Ref. 9900~12600	25	31.30	-

Operating Temperature Range : -40~85°C

Power Capacity : 3W max.

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel:1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551


Europe Headquarters
Pulse GmbH & Do, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg,4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998



MECHANICAL DIMENSION

Outline

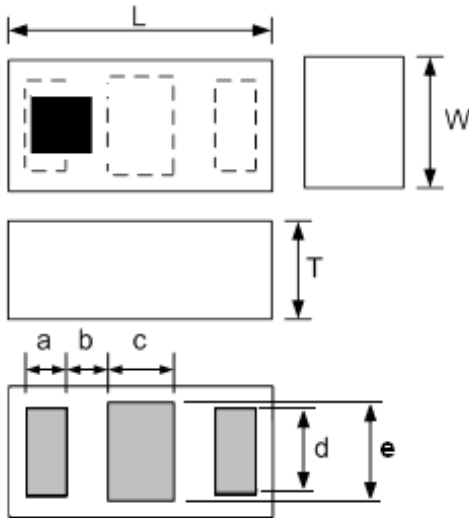


Termination


Terminal name	Function
P1	Input/Output
P2	GND
P3	Output/Input

Mechanical

	Dimension
L (mm)	1.60±0.10
W (mm)	0.80±0.10
T (mm)	0.35(Max.)
a (mm)	0.25±0.05
b (mm)	0.23±0.05
c (mm)	0.40±0.05
d (mm)	0.55±0.05
e (mm)	0.60±0.05



Reference design of EVB

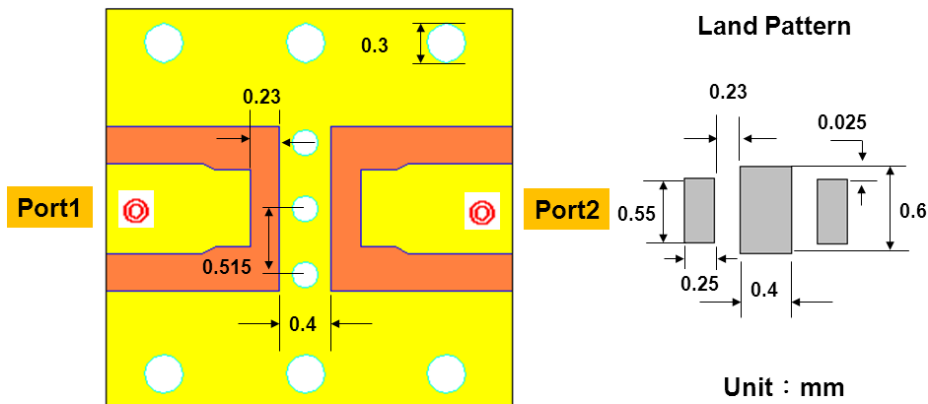


Ⓢ Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

Description: 1608 5GNR-n77 Band Pass Filter


PART NUMBER: BPF1608LRPFR3750L

MEASURING DIAGRAM

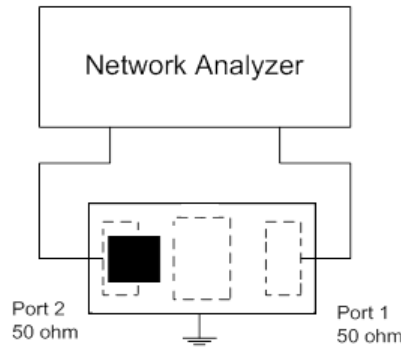

Test Instrument :
Agilent E5071A Network Analyzer.

ELECTRICAL PERFORMANCES

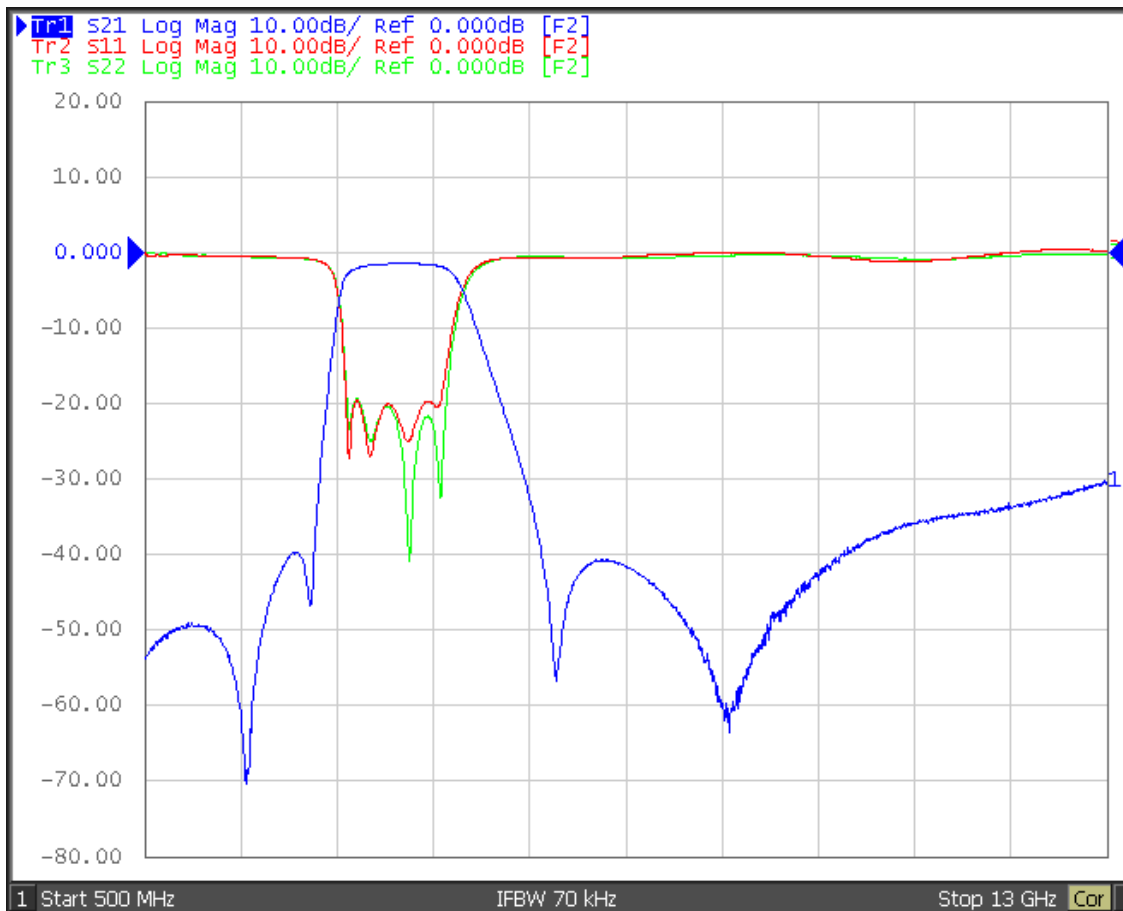

● Measured on Agilent E5071C Network Analyzer

Frequency Characteristics

In the effort to improve our products, we reserve the right to make changes judged to be necessary.
CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 1608 5GNR-n77 Band Pass Filter

PART NUMBER: BPF1608LRPFR3750L

REVISION HISTORY

Revision	Date	Description
Version 1	Dec. 28, 2021	- New issue