

| | | | | | | |
|-----------------|----------|---|---------|---------|------|----------|
| Phytion™ | | Device Programmers and Development Tools for Microcontrollers | | | | |
| Home | Products | E-Shop | Support | Contact | News | Site Map |

Quick Links

- Help Desk
- Downloads
- All Programmers
- Device Search
- Tools Catalogs

Shopping Cart

Items: 0

Total: \$0.00


Your Account

Products

- Development Tools
- ARM
- 8051
- Other
- Device programmers
- All Models
- Universal
- In-System
- Gang
- Adapters
- Custom made tools
- OEM tools

AE-B88-NM1

DIP40/ BGA88 specialized adapter for FLASH memory.

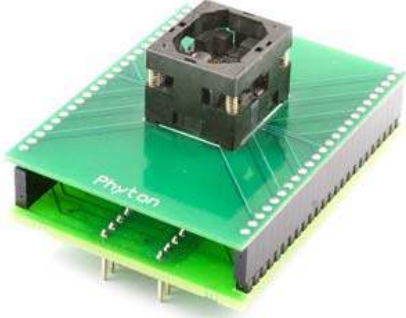

Description:

DIP40/BGA88 specialized adapter for FLASH memory. Device package dimensions: 11.0 x 8.0 x 1.2(1.0) mm, 0.8 mm pitch.

Supported Devices:

Click the device programmer model below to get an appropriate list of the devices supported by this programmer with this adapter:

- [ChipProg-48](#)
- [ChipProg-G4](#)
- [ChipProg-40](#)
- [ChipProg+](#)

[Adapter wiring diagram.](#)

Adapter Connection Table:

| DIP -40 | BGA-64 | U1, 74AHC573 | U2, 74AHC573 | C1, 150pF | C2, 0.1uF |
|------------|-------------------------------|-----------------|-----------------|--------------|--------------|
| 1 | L3,K7,J8 | | | | |
| 2 | G8 | | | | |
| 3 | | 11 | 11 | 1 | |
| 4 | F4 | | | | |
| 5 | D3 | | | | |
| 6 | | | | | |
| 7 | F5 | | | | |
| 8 | G7 | | | | |
| 9 | D4 | | | | |
| 10 | E2 | | | | |
| 11 | F2 | | | | |
| 12 | C1 | | | | |
| 13 | B1 | | | | |
| 14 | D1 | | | | |
| 15 | E1 | | | | |
| 16 | F1 | | | | |
| 17 | G1 | | | | |
| 18 | | | | | |
| 19 | H8 | | | | |
| 20 | L1,L2,L5,L6,L7,L8,B4,C4,E5,C6 | 1, 10 | 1, 10 | 2 | 2 |
| 21 | K1 | | | | |
| 22 | J2 | | | | |
| 23 | H2 | 2 | | | |
| 24 | G2 | | 2 | | |
| 25 | H3 | 3 | | | |
| 26 | J3 | | 3 | | |
| 27 | G3 | 4 | | | |
| 28 | G4 | | 4 | | |
| 29 | H4 | 5 | | | |
| 30 | J4 | | 5 | | |

| | | | | | |
|--|----|----------------|----|----|---|
| | 31 | J5 | 6 | | |
| | 32 | H5 | | 6 | |
| | 33 | G5 | 7 | | |
| | 34 | G6 | | 7 | |
| | 35 | J6 | 8 | | |
| | 36 | H6 | | 8 | |
| | 37 | H7 | 9 | | |
| | 38 | J7 | | 9 | |
| | 39 | | | | |
| | 40 | L4,B5,B6,K6,E4 | 20 | 20 | 1 |
| | | C3 | | 12 | |
| | | C7 | | 13 | |
| | | E8 | 12 | | |
| | | F7 | 13 | | |
| | | D8 | 14 | | |
| | | C8 | 15 | | |
| | | B8 | 16 | | |
| | | E7 | 17 | | |
| | | D7 | 18 | | |
| | | F6 | 19 | | |
| | | B3 | | 16 | |
| | | E6 | | 15 | |
| | | B7 | | 14 | |
| | | B2 | | 17 | |
| | | D2 | | 18 | |
| | | F8 | | 19 | |

Copyright © 2007-2010 Phytton, Inc.

Phone: 718-259-3191 • E-mails: info@phyton.com, sales@phyton.com, support@phyton.com