




|                 |                      |                                  |
|-----------------|----------------------|----------------------------------|
| Transformer No. | XF-03000-2120        | 1 <sub>phase</sub> / -con. 50 Hz |
| Customer        | STANDARD TRANSFORMER | Note                             |
| Assembly Comp.  | CENTER POTTED        | Date/sign. 04-01-2011 JAKOB      |



Marking

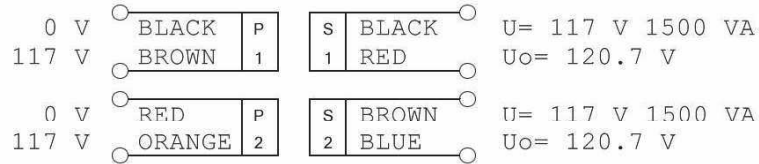

MADE BY AMGIS LLC USA  
 TRANSFORMER P/N XF-03000-2120  
 PRIM.2\*117V 50/60Hz 3084VA  
 SEC.2\*117V 2\*1500VA



Changed from

Changed to

|                  |           |                   |                             |
|------------------|-----------|-------------------|-----------------------------|
| Tests.           |           |                   |                             |
| Uo. Tolerance, ± | 3 %       | Iomax: 301.4 (mA) | 117 V over P1. Isol: 4K V   |
| Dimensions:      |           |                   |                             |
| Max H:           | 4.3" (mm) | Max. Ø:           | 9.0" (mm) Terminals: 250 mm |

(mm)

Center potted with 1/2" dia hole  
 1 pc neoprene gasket 9" dia x 1/2" ID x 1/8" thk

Shipping Weight: 41 lbs