

Indicator Lights Neon, LED and Filament Lamp





































































































Colours and voltages:

-  **Neon** Available with Red, Amber, Green or Clear lenses
100/130V (marked 110V), 200/250V (marked 230V)
-  **LED - DC** Red, Yellow, Green, Blue, White
2.0/2.2V Resistors for other voltages available.
-  **LED - AC** Red, Yellow, Green, Blue, White
110-230V ac operation.
-  **Filament lamp** Available with Red, Amber, Green, Clear or Blue lenses
6V, 12/14V, 24/28V.

- ▶ Neon, LED, mains LED or filament lamp
- ▶ Bezel sizes from 6.7 to 16.3mm diameter
- ▶ Red, amber, green and clear lenses
- ▶ Red, yellow, green, blue and white LEDs
- ▶ Wide choice of styles


To create a catalogue number:

Refer to the 2 columns below (terminal and type), then state: Lens colour, voltage and whether neon, LED or filament lamp

| ▶ TERM | ▶ TYPE | ▶ PANEL & °C | ILLUM'N OPTIONS | APPROVAL | ▶ DIMENSIONS (mm) |
|--------|--|---|--|--|--|
| L | (C) 2870 00  |  12.7 |  |    |  9.9 22.8 5.0  Ø13.6 |
| K 2.8 | |  0.75-2.0 |  |  | |
| H 4.8 | |  |  |  | |
| C 6.3 | |  |  page 6 |  | |
| L | (C) 0589 00  |  12.7 |  |    |  10.5 21.6 3.2  Ø15.9 |
| K 2.8 | |  0.8-1.5 |  |  | |
| H 4.8 | |  |  |  | |
| C 6.3 | |  |  page 6 |  | |
| L | L 0081 00 Chrome bezel  |  12.7 |  |    |  Ø16.0  Ø18.3 |
| | |  9.5 |  |  | |
| | |  |  | | |
| | |  |  page 6 |  | |
| L | (C) 0177 00 Chrome bezel  |  12.7 |  |    |  14.9  Ø14.6 |
| K 2.8 | |  12.0max |  |  | |
| H 4.8 | |  |  |  | |
| C 6.3 | |  |  page 6 |  | |
| L | (C) 0067 00 Chrome bezel  |  12.7 |  |    |  38.1 5.1  Ø16.0 |
| K 2.8 | |  1.14max |  |  | |
| H 4.8 | |  |  |  | |
| C 6.3 | |  |  page 6 |  | |
| L | (C) 0180AA  |  12.7 |  |   |  10.4 22.3 5.1  Ø15.0 Starlock fixing  21.3 1.3 |
| C 6.3 | |  19.0max |  |  | |
| | |  |  | | |
| | |  |  page 6 |  | |

| TERM | | TYPE | PANEL & °C | ILLUM'N OPTIONS | APPROVAL | DIMENSIONS (mm) | |
|-------|--|------------------------------------|----------------------------|--------------------|----------|----------------------------|-----------|
| L | | (C) 0180BB Chrome bezel | 13.5 0.9-1.14 page 6 | | | 10.4 22.3 5.1 | Ø16.3 |
| C 6.3 | | | | | | | |
| L | | (C) 0579 00 | 14.0 2.5max page 6 | | | 10.0 25.4 3.2 | Ø15.9 |
| K 2.8 | | | | | | | |
| H 4.8 | | | | | | | |
| C 6.3 | | | | | | | |
| C 6.3 | | (C) 1092 | 19.0 4.0max page 6 | | | 26.9 15.0 max Ø22.9 | Ø22.9 |

Indicator Lights Neon, LED and Filament Lamp

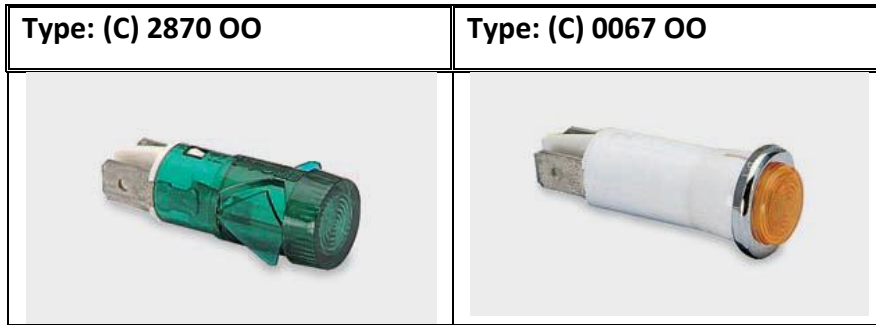

Part Number Ordering

| Arcoelectric Part Number | Type | Light Source | Colour | Voltage |
|--------------------------|-------------|--------------|--------|---------|
| C287000NAD | (C) 2870 OO | Neon | Red | 230 V |
| C287000NAE | (C) 2870 OO | Neon | Green | 230 V |
| C287000NAI | (C) 2870 OO | Neon | Amber | 230 V |
| C287000NAO | (C) 2870 OO | Neon | Green | 110 V |
| C287000NAP | (C) 2870 OO | Neon | Red | 110 V |
| L006700NAA | (C) 0067 OO | Neon | Red | 230 V |
| L006700NAF | (C) 0067 OO | Neon | Amber | 230 V |
| L006700NAM | (C) 0067 OO | Neon | Green | 230 V |