



698-960 & 1710-2700 MHz LTE WORLD BAND ANTENNA Part Numbers: 2372112-1, 2372112-2

2372112-5, 2372112-6

FEATURES & BENEFITS


- Adhesive backing on the FPC simplifies mounting within the device
- Omnidirectional coverage
- Efficient design reduces power usage
- No matching components required
- Ground-plane independent design

SPECIFICATIONS


	·		
Frequency Range (MHz)	698-960 1710-2700		
VSWR	< 2.6:1 < 3.0:1		
Efficiency	38%	52%	
Average Gain	-4.8dBi	-3.7dBi	
Peak Gain	-0.2dBi	i 0.2dBi	
Power Handling	10 Watt cw		
Feed Point Impedance	50 ohms unbalanced		
Polarization	Linear		
Size	65 mm x 15 mm x 0.2 mm		
Weight	< 2.0 g		
Mounting	Adhesive Tape		
Mating Connector	MHF and MHF4L type, refer to page5		
Cable (coaxial)	1.13mm Dia. Refer to page5		
Operating Temperature	-40 to +85°C		
Storage Temperature	-40 to +85°C		
Hazardous Materials	A certificate of conformance is available from the product page on TE website.		



RF DATA

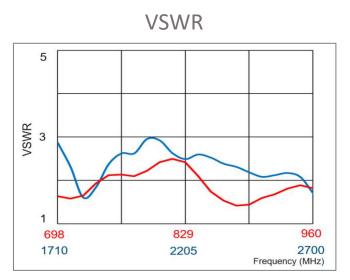




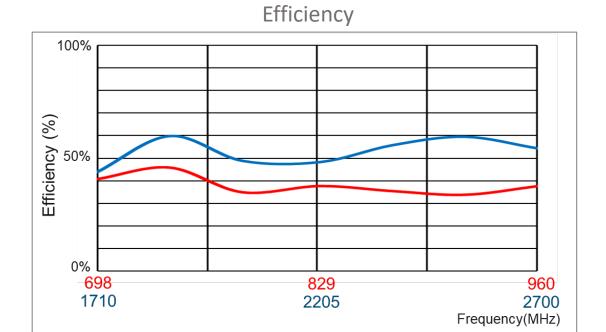

Data measured in free space and on plastic device enclosure




RADIATION PATTERN

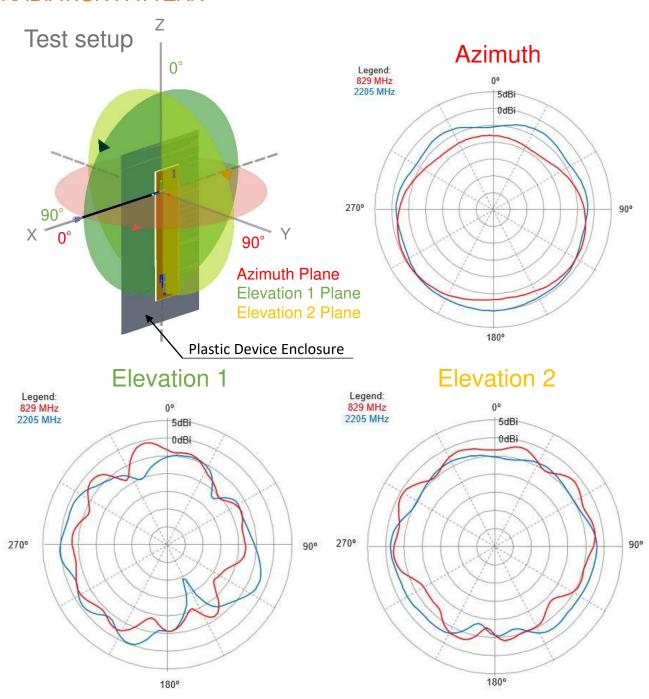


Data measured in free space and on plastic device enclosure



KEEP OUT AREA



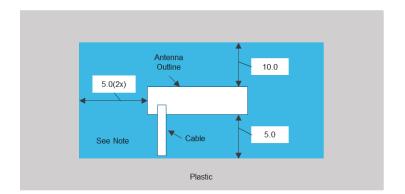


NOTES

- 1. Antenna designed to be mounted on plastic cover.
- 2. Area in blue indicates Keep Out Area.
- 3. For more information please call TE.

Dimension: mm Diagrams is not to scale

DIMENSIONS

(Refer to Page5 for dimension "A")

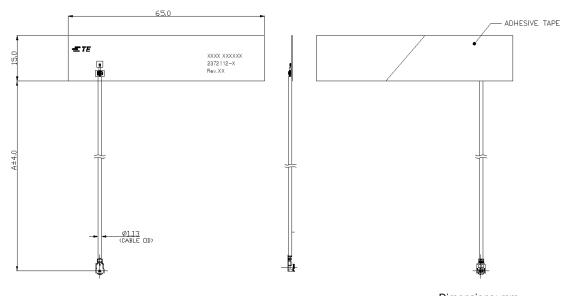


Dimensions: mm Diagram is not to scale



MATING COMPONENTS TO PART NUMBER AND DIMENSIONS

2372112-1	150	5.91	1.13	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
2372112-2	100	3.94	1.13	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
2372112-5	150	5.91	1.13	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
2372112-6	100	3.94	1.13	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
PART	ММ	INCH	CABLE (OD)	CONNECTOR TYPE	PART NUMBER	IMAGE
NUMBER	NUMBER CABLE LENGTH(A) mn		mm	(ON CABLE)	MATING COMPONENTS	

PACKAGING

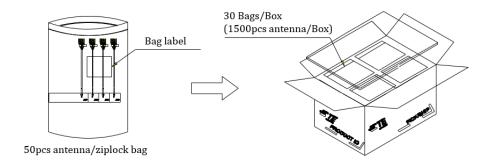

TE TECHNICAL SUPPORT CENTER

USA: +1 (800) 522-6752 Canada: +1 (905) 475-6222 Mexico: +52 (0) 55-1106-0800 Latin/S. America: +54 (0) 11-4733-2200 +49 (0) 6251-133-1999 Germany: UK: +44 (0) 800-267666 France: +33 (0) 1-3420-8686 Netherlands: +31 (0) 73-6246-999 China: +86 (0) 400-820-6015

For phone numbers in other countries, go to te.com/support-center

te.com

TE Connectivity, TE Connectivity (logo) are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2020 TE Connectivity Ltd. family of companies All Rights Reserved.

01/2022