

V-TYPE MARKERS PUSH-ON MARKER SYSTEM

Technical Datasheet

TTDS-096 Revision 3 - August 2015

V-Type markers are individual push-on characters used to identify wires and small cables permanently. They are designed with an expanding profile which enables each marker to accommodate a wide range of wire and cable sizes.

V-Type markers are a simple, cost effective solution for many commercial wire identification applications. The markers are supplied chevron cut to ensure legends remain aligned.

The standard marker range is available in white or yellow with black print. They are supplied either loose in a box or on reels.

Color coded markers are also available within the range.

PAGE 1



Features

- Four sizes covering wire diameters up to 16.0mm (0.63 inch).
- Color Coded 0 9.
- Characters A Z and symbols.
- Color Matched to BS6746C 1990 and IEC 60304.
- Excellent resistance to common industrial fluids, as described in RW-2535

Applications

- Pre-Termination wire and cable identification.
- Identification of wire or cable diameters 1.4 to 16mm (0.055 to 0.63 inches).
- Electronics, Mass transit and general Industrial uses.

Temperature Rating

Operating Temperature -45°C to 70°C (-49°F to 158°F).

Design For Environment

- The PVC used for these markers meets all current RoHS and REACH legislation.
- Further information and a downloadable declaration covering RoHS and REACH compliance can be found at the 'TE Product Compliance Support Centre': http://www.te.com/usa-en/utilities/product-compliance.html

Specifications / Approvals

TE Connectivity Standard	RW-2535
Industrial	SAE AS 5942 Marking of Electrical Insulating Materials.
	BS 3858 Specification for binding and identification sleeves for use on electric cables and wires.
	IEC 60304 Standard Colours for Insulation for Low Frequency Cables and Wires


Where possible, TE has tested product as a finished item, including the print. Operational tests are followed by an assessment of mark adherence to validate fit, form and function. Further details can be found in TE standard RW-2535.




PAGE 2



V-TYPE PUSH-ON MARKERS

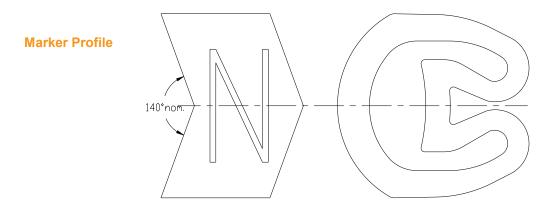

Part Description

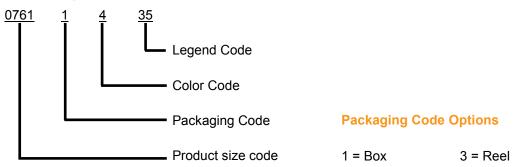

Ordering Information

Size Code	Marker Size	Recommended	Pack Quantity	
		mm	inch	
0761	V3/3	1.4 - 2.8	0.06 - 0.11	1000
0762	V5/3	2.8 - 5.0	0.11 - 0.20	1000
0763	V10/4	4.0 - 10.0	0.16 - 0.39	500
0764	V16/6	8.0 - 16.0	0.31 - 0.63	250

Color Codes

Code	Marker Color	Print Color	Code	Marker Color	Print Color
0	Black	White	5	Green	White
1	Brown	White	6	Blue	White
2	Red	White	7	Violet	White
3	Orange	Black	8	Grey	Black
4	Yellow	Black	9	White	Black



V-TYPE PUSH-ON MARKERS

Legend Codes

Legend	Code	Legend	Code	Legend	Code
0	00	F	15	U	30
1	01	G	16	V	31
2	02	Н	17	W	32
3	03	I	18	Х	33
4	04	J	19	Y	34
5	05	К	20	Z	35
6	06	L	21	+	36
7	07	Μ	22	-	37
8	08	Ν	23	/	38
9	09	0	24	~	39
А	10	Р	25	Earth	40
В	11	Q	26	Blank	42
С	12	R	27		48
D	13	S	28		
Е	14	т	29		

Description Example: 07811910 is

V-Type, Size 3/3, Color white (with black mark), bagged loose in a box, printed with character A



www.te.com/rail

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

PAGE 4

