


NUMBER
C-380392

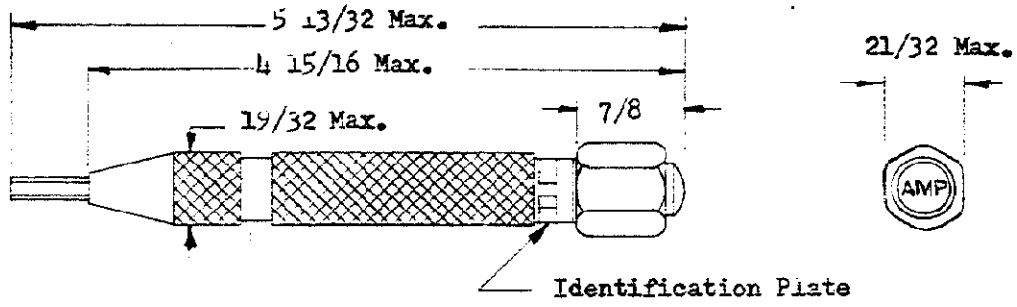

Tool Number	Trip Force
380392-1	20-22
380392-2	12-13
380392-5	9-10
380392-8	16-18

APPROVED BY THE AMP BOARD
SERVING THE ELECTRICITY INDUSTRY

1. For readjustment or replacement of parts, return Tool to AMP, Inc., Mt. Joy, Penna., to insure proper calibration.
2. Trip force is the force in pounds, required to trip the tool.

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

PRINT DIST
36

				©1956 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		CUSTOMER COPY REFERENCE ONLY	
				MATERIAL AND FINISH Steel-Plated; Aluminum		AMP AMP INCORPORATED HARRISBURG, PENNA.	
				Weight 3 ± 1/2 Oz.		CLASS _____	
				WIRE — RANGE — INSULATION — — — — —		TYPE _____	
A-2 Loc 1A was A				P.L. - 8/10/65			
A-1 ADDED - 13 - 8				SH SD 7/20/65			
A REV. & REDRAWN				FE NK 1/14/65			
LTR				REVISION RECORD		DR	
DR				JEShulg 1/13/65		DE	
CHK				NS 1-14-63		APP	
				TOLERANCE EXCEPT AS NOTED ± .015 ± 1° 0'		SCALE	
				± 1° 0'		LOC	
				M A		NO	
				C-380392		REV	
				TOOL-STANDARD CERTI-LOK		A-2	
				INSERTION			