

# JST

Hand crimping tool  
Type: WC-491

## Features

Parallel action operation

Ratchet release

Easy readjustment of load

Contact locator with insulation-stop

Precisely ground profiles

Ergonomic soft grips colour: green

Fully recyclable


Applicable terminal:  
( )ZH-002T-P0.5

Cross section range:  
Profile 1: 28 AWG  
Profile 2: 26 AWG

Crimp height specification  
28 AWG - 0.50-0.55mm  
26 AWG - 0.55-0.60mm


# OPERATION INSTRUCTIONS

DWG: JUKCT-009-02-00

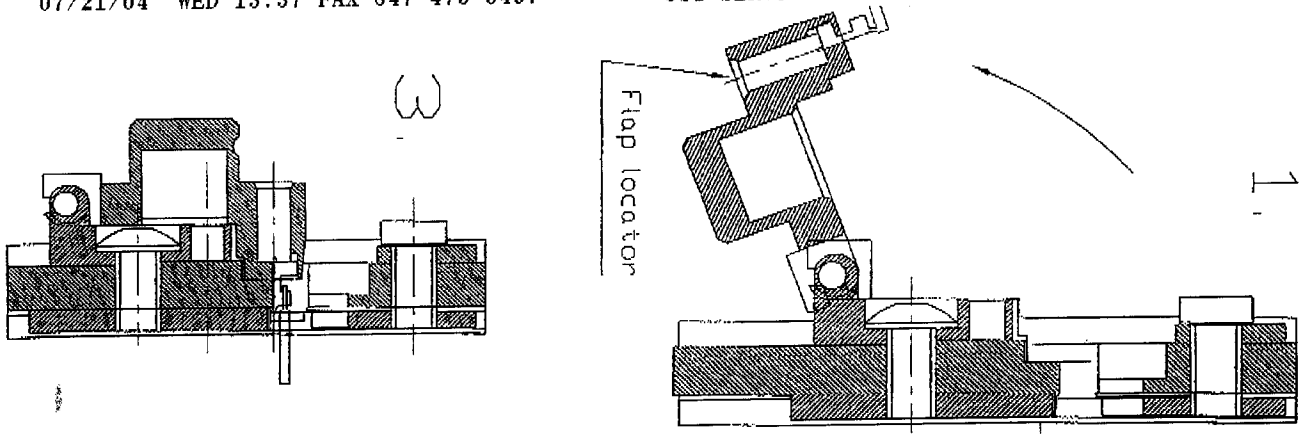

1. Open Flap locator and insert contact up to stop.

2. Close flap locator.

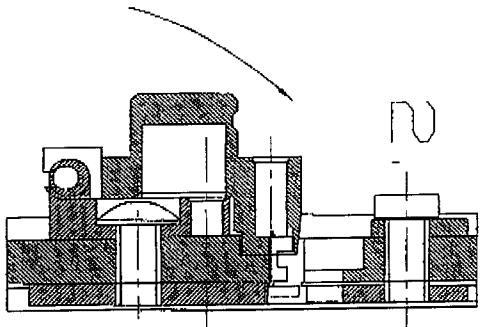

3. Close handtool until first ratchet.

4. Insert wire up to stop.

5. Close handtool until the ratchet releases.

6. Open flap locator and carefully remove the wire.

