


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SXAM-01T-P0.6	XA Connector Male Contact
2	SXA-01T-P0.6	XA Connector Female Contact
3	UL1007, 22 AWG	Black

Electrical Specifications
Current: 3.0A AC/DC
Voltage: 250V AC/DC

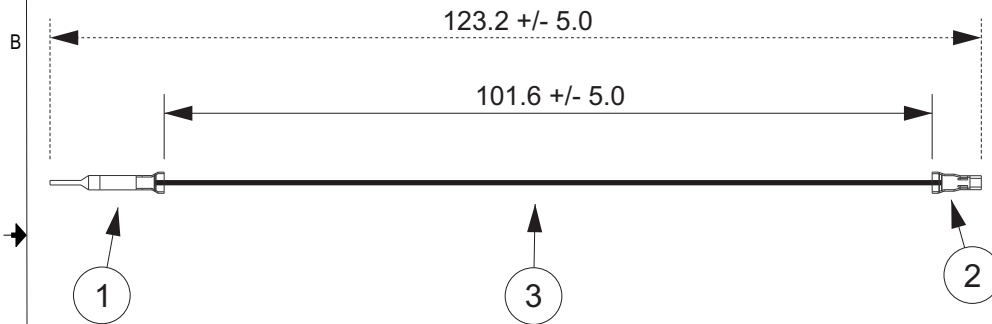

APPLICABLE HOUSINGS						
XA SERIES				XAD SERIES		
NO. OF CIRCUITS	HOUSING PART NO. FOR SXA CONTACT	HOUSING PART NO. WITH PANEL LOCKS FOR SXAM CONTACT	HOUSING PART NO. WITHOUT PANEL LOCKS FOR SXAM CONTACT	NO. OF CIRCUITS	HOUSING PART NO. FOR SXA CONTACT	HOUSING PART NO. FOR SXAM CONTACT
2	XAP-02V-1	XARR-02V	XARR-02VF	8	XADRP-08V	XADR-08V
3	XAP-03V-1	XARR-03V	XARR-03VF	10	XADRP-10V	XADR-10V
4	XAP-04V-1	XARR-04V	XARR-04VF	12	XADRP-12V	XADR-12V
5	XAP-05V-1	XARR-05V	XARR-05VF	14	XADRP-14V	XADR-14V
6	XAP-06V-1	XARR-06V	XARR-06VF	16	XADRP-16V	XADR-16V
7	XAP-07V-1	XARR-07V	-	18	XADRP-18V	XADR-18V
8	XAP-08V-1	XARR-08V	XARR-08VF	20	XADRP-20V	XADR-20V
9	XAP-09V-1	XARR-09V	XARR-09VF	22	XADRP-22V	XADR-22V
10	XAP-10V-1	XARR-10V	XARR-10VF	24	XADRP-24V	XADR-24V
11	XAP-11V-1	XARR-11V	-	26	XADRP-26V	XADR-26V
12	XAP-12V-1	XARR-12V	XARR-12VF	28	XADRP-28V	XADR-28V
13	XAP-13V-1	XARR-13V	-	30	XADRP-30V	XADR-30V
14	XAP-14V-1	XARR-14V	-	32	XADRP-32V	XADR-32V
15	XAP-15V-1	XARR-15V	-	34	XADRP-34V	XADR-34V
-	-	-	-	36	XADRP-36V	XADR-36V
-	-	-	-	40	XADRP-40V	XADR-40V



All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME			
		DESCRIPTION			
		2.5mm Pitch XA & XAD Series Standard Leads - 4" Inside Length DOUBLE END LEADS, M-F			
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.	REV	
Checked By: Steven Pilkington	SCALE	ASXAMSXA22K102			
	1:1	DRAWING NO. GAM-370	DATE 5/14/2018		

ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Add Electrical Specifications	7/02/2018	LM