

2.1 GHz RX Diversity Ceramic Antenna

Ground cleared under antenna, clearance area 10.60 x 6.25 mm

Pulse Part Number: W3030



Features

- Omnidirectional radiation
- Low profile
- Compact size W x L x H (10 x 3.2 x 2 mm)
- Low weight (310 mg)
- Lead free materials
- Fully SMD compatible
- Lead free soldering compatible
- Tape and reel packing
- RoHS Compliant Product

Applications

- W-CDMA
- 2.11-2.17 GHz

Electrical specifications @ +25 °C

Note: Electrical characteristics depend on test board (GP) size and antenna positioning on GP and Ground Clearance area size.

RX Diversity 2.11-2.17 GHz

Typical performance (test board size 80 x 37 mm, PWB ground clearance area 10.60 x 6.25 mm)

Frequency Range [MHz]	Linear Max Gain [dBi]	Efficiency [%] / [dB]	Return Loss min. [dB]	Impedance [Ω]	Operating Temperature [°C]
2110 – 2170	2 (peak) 1.5 (band edges)	80 / -1 (peak) 70 / -1.55 (band edges)	-10	50	-40 to +85

Pulse Antennas

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501
www.pulseeng.com/antennas

2.1 GHz RX Diversity Ceramic Antenna

Ground cleared under antenna, clearance area 10.60 x 6.25 mm

Typical Electrical Characteristics (T=25 °C)

Measured on the 80 x 37 mm test board

Typical Return Loss S11/impedance


W-CDMA Diversity RX

14 Sep 2006 16:01:48

CH1Markers

- 1. -18.101 dB 2.11000 GHz
- 2. -17.767 dB 2.17000 GHz
- 3. -36.135 dB 2.140.000 000 MHz

CH1 S11 LOG 7 dB/REF 0 dB

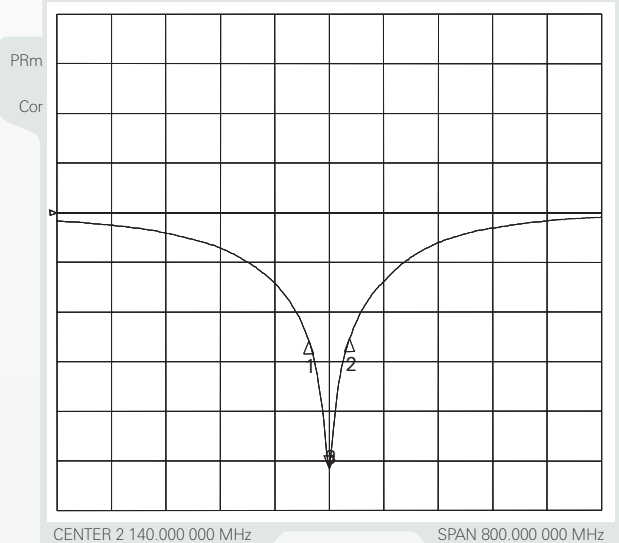


W-CDMA Diversity RX

14 Sep 2006 16:02:44

CH1Markers


- 1. 52.707 Ω -10.217 Ω 2.11000 GHz
- 2. 50.678 Ω 13.068 Ω 2.17000 GHz
- 3. 49.213 Ω 1.1719 Ω 87.154 pF 2 140.000 000 MHz

CH1 S11 1 U FS
PRm
Del
Cor

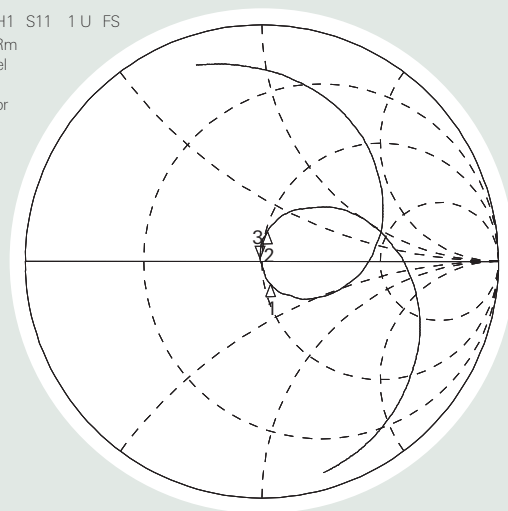


Free space efficiency and maximum gain

RX Diversity 2110–2170 Mhz

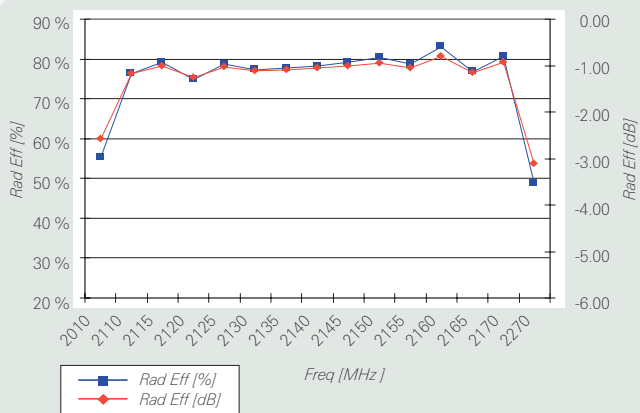

RX Diversity 2110–2170 Mhz

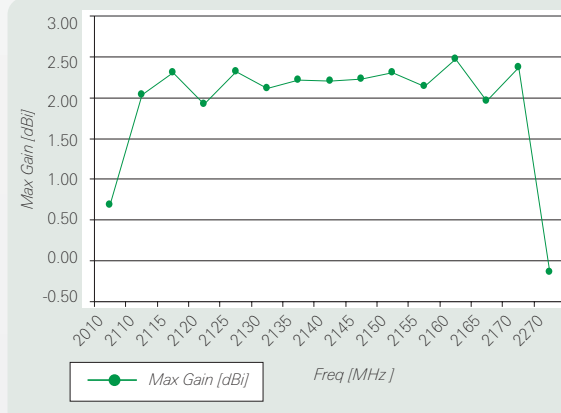

Pulse Antennas

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501





www.pulseeng.com/antennas



2.1 GHz RX Diversity Ceramic Antenna

Ground cleared under antenna, clearance area 10.60 x 6.25 mm

Typical Free Space Radiation Patterns

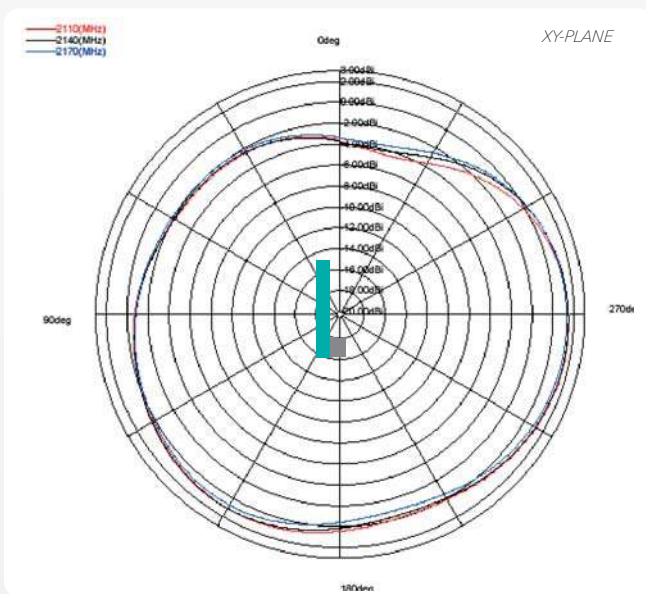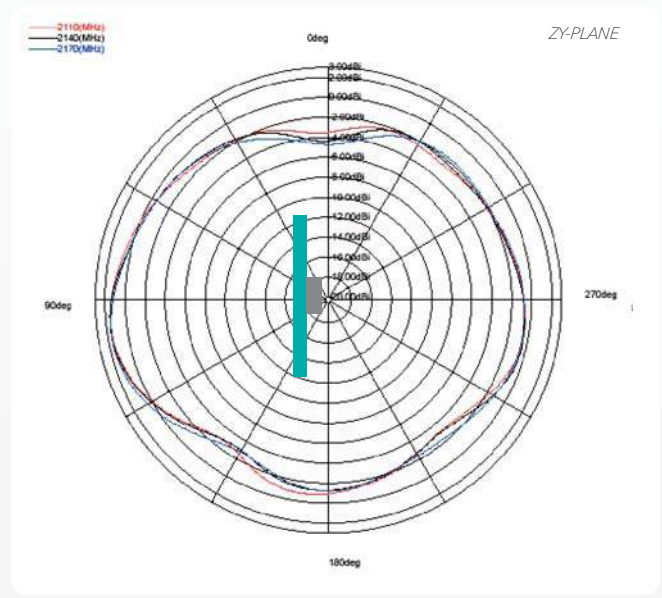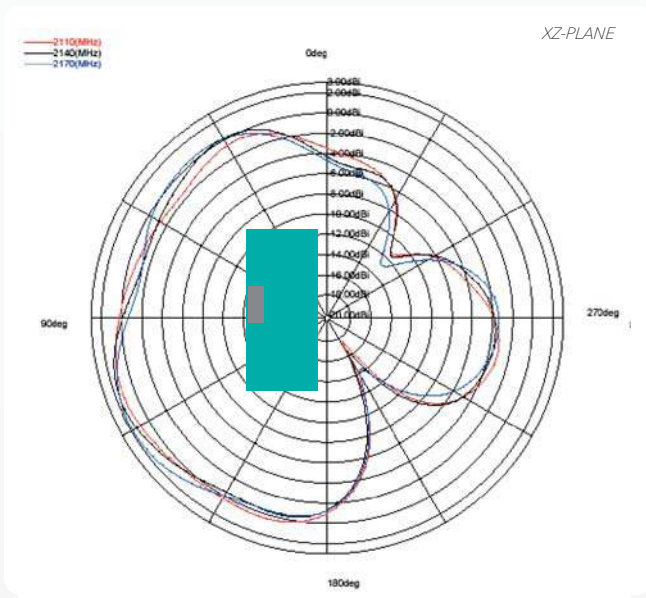

Pulse Antennas

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501
www.pulseeng.com/antennas

