




21.4 MHz Crystal Bandpass Filter

Part Number: AM21.4CR348

Center Frequency:	21.4 MHz
3 dB Bandwidth:	CF +/-100 Khz min.
50 dB BW:	+/-500 Khz max
Insertion Loss:	8 dB max
Return Loss:	10 dB min over +/-80 Khz
Temp Ambient:	-25 to 50 deg. C
Impedance:	50 Ohms
Power	20 dBm
Connector Type:	SMA (F)
Dimensions:	2.45 x 0.54 x 0.54 inches

Outline Drawing:

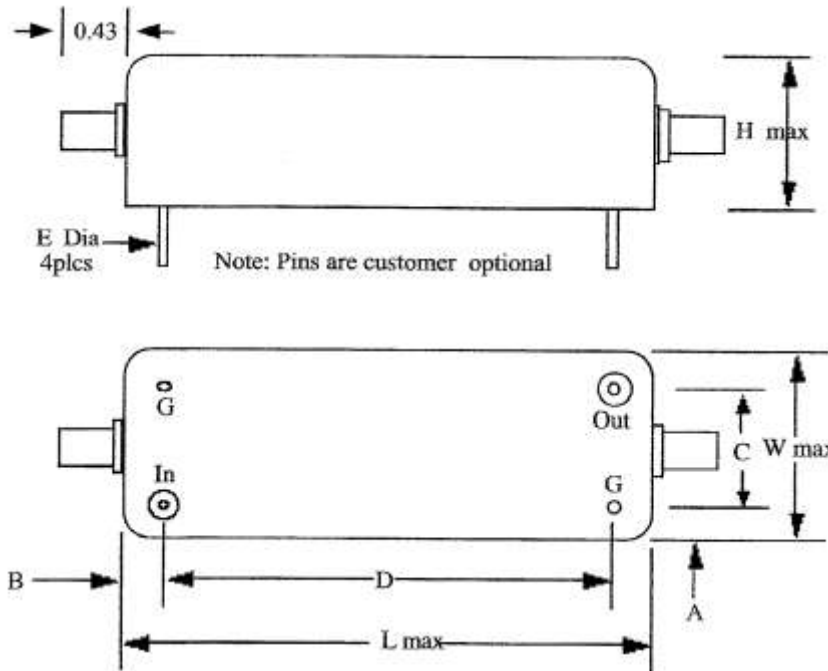

L	W	H	A	B	C	D	E
2.40	0.50	0.50	0.13	0.13	0.24	2.14	0.030

Note : Use following for maximum dimensions:

- L = 2.45 inches
- W = 0.54 inches
- H = 0.54 inches



21.4 MHz Crystal Bandpass Filter

Part Number: AM21.4CR348

Response Plot:

