

Description: 18184 GPS&GLONASS Patch Antenna

PART NUMBER: ANT1818B00BT1516S

Features:

- Size: 18x18x4 mm
- Support GPS & GLONASS system
- High radiation efficiency
- · Reflow process compatible
- RoHS compliant



Applications:

- Navigation device
- Telematics box
- Fleet management

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and rederal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:



Description: 18184 GPS&GLONASS Patch Antenna

PART NUMBER: ANT1818B00BT1516S

ELECTRICAL SPECIFICATIONS

Working Frequency 1575~1606 MHz

GPS: 7 MHz(Typ.)
GLOASS: 7 MHz(Typ.)

GPS: 1.89 dBi (Typ.)

VSWR. /Return Loss GLONASS: 2.59 dBi (Typ.)


VSWR. /Return Loss 2.0 Max /10.0 dB Min Polarization RHCP

Operating Temperature - 40~105 ℃

NOTE

- 1. Based on 50×50mm² square ground plane.
- 2. Centre frequency will be offset to working frequency while changes of customer's housing and ground plane.
- 3. Please contact local sales if you need customized design to gain optimum antenna performance.

MECHANICAL DRAWING

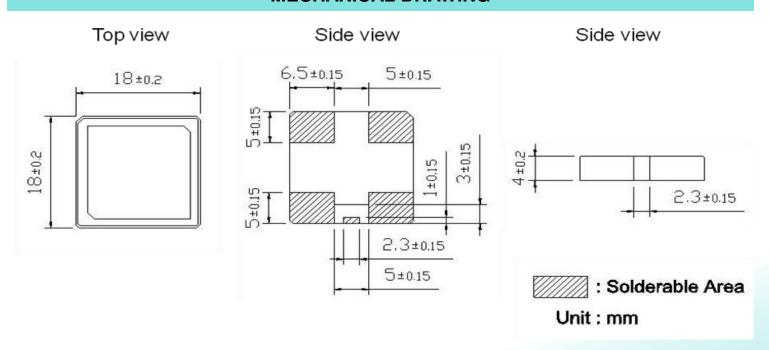




Description: 18184 GPS&GLONASS Patch Antenna


PART NUMBER: ANT1818B00BT1516S

REFERENCE DESIGN OF EVALUATION BOARD

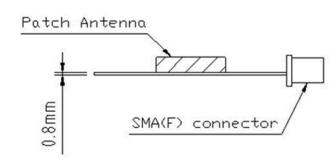

Ground Plane Size: 50x50 mm²

Evaluation Board

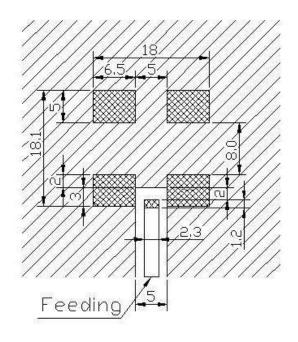

Soldering Pad

: Ground Area

Unit: mm


Footprint



Description: 18184 GPS&GLONASS Patch Antenna

PART NUMBER: ANT1818B00BT1516S

REFERENCE DESIGN OF EVALUATION BOARD

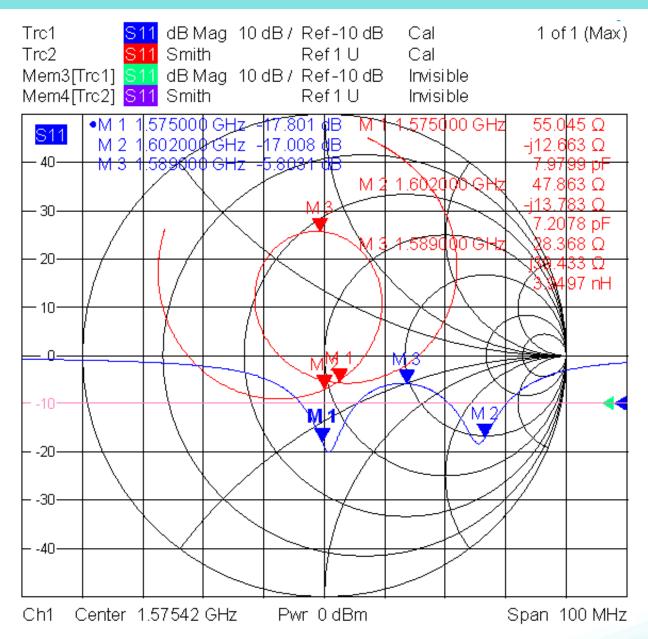


Return Loss

Description: 18184 GPS&GLONASS Patch Antenna

PART NUMBER: ANT1818B00BT1516S

ELECTRICAL PERFORMANCES

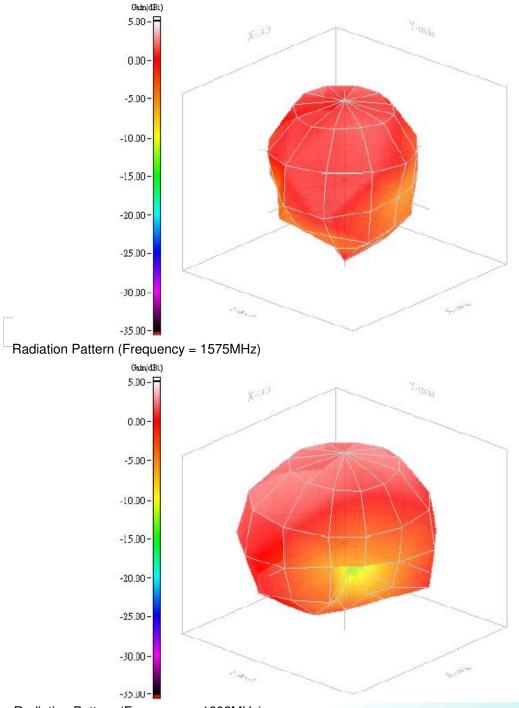

Radiation Pattern (Frequency = 1602MHz)

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



Description: 18184 GPS&GLONASS Patch Antenna

PART NUMBER: ANT1818B00BT1516S

REVISION HISTORY			
Revision	Date	Description	
Version 1	Oct. 14, 2020	- New issue	