

# LED LIS-B1002



## Product Description

**LED LIS-B1002** made to add simplicity, efficiency and convenience to every home, this Smart Wi-Fi LED bulb allows you to control your home's lighting from anywhere. Because no hub is required, your smart bulb will simply connect to your home's Wi-Fi to be effortlessly controlled with the free Life in Sync mobile app for smartphones and tablets (iOS and Android). With the tap of a finger, you can set your bulb to turn on or off around your schedule, letting your lights wake you up, greet you at the door or put you to sleep. Using simple voice command with Amazon's Alexa or Google's Assistant, you can dim your bulbs up or down, choose the perfect color temperature (2000K-5000K), or turn on or off without having to move. Sync the lights in your life with Euri Lighting's free Life in Sync app and Smart Wi-Fi LED bulb.



**Estimated Energy Cost:** \$1.20 per year

\*Note: Design, features and specifications subject to change without notice. Some features may not be available on all models. For more information regarding dimmer compatibility please visit: [www.eurilighting.com](http://www.eurilighting.com) or call 1-888-743-5766


## Specifications

Input Power	Input Voltage	Lumen Output	Beam Angle	Center Beam	CCT
10 W	120V/60Hz	650 lm	110°	N/A	2000 K - 5000 K
CRI	Luminous Efficacy	Power Factor	Input Current	Base/Cap	Lamp Lifespan
80	65 lm/W	0.5	140 A	E26	15,000 Hrs.

### Product Features

- Dimmable
- Wi-Fi Enabled
- Tunable
- Damp Rated

### Product Dimensions

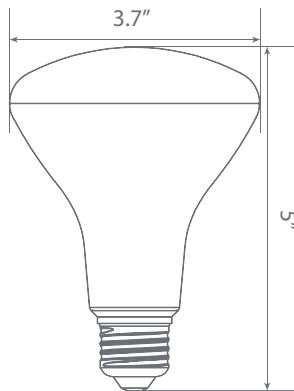

### Product Photometric Data

