## Type PMG-KB-01-Q2S Panel Mount Fuse Holder 13/32'' x 1<sup>1</sup>/<sub>2</sub>'' (10.3 x 38.1mm) Knob / Bayonet




www.optifuse.com (61

(619) 593-5050

Electrical Rating: 30A, 600V AC Fuse Style: 13/32" x 1<sup>1</sup>/<sub>2</sub>" (10.3 x 38.1mm) Material: Frame and Cap: Phenolic (UL flame: 94V-1) Terminals: Nickel-plated brass Cap: Knob type, Bayonet type Mounting: by screws Terminal:Solder/Quick-Connect 6.4mm / 0.250" Panel Thickness: 0.5 ~ 10mm Agency Standards and Listings:



Product Dimensions: Inches [mm]

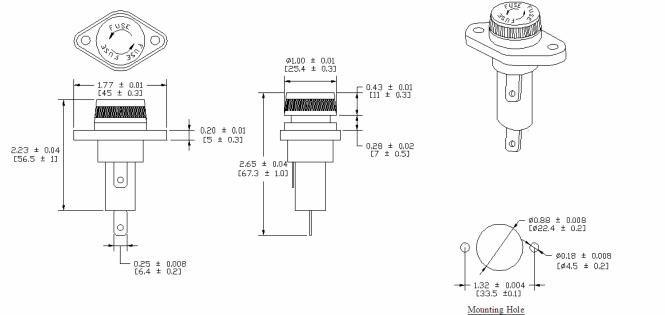



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Fuse Holders are not intended for circuit disconnect. All power should be disconnected before removing fuse. -Avoid contact of Fuse Holder with chemical solvent. Prolonged contact may damage the device performance.