




9300 MHz LC Bandpass Filter

Part Number: AE9300B8783

Center Frequency:	9300 MHz
Passband:	9200-9400 MHz flatness <0.5 dB
Insertion Loss:	<1 dB
Ripple in Passband:	<0.1 dB
Return loss over Passband:	>14 dB
Rejection:	>60 dB @ 2.4, 7.1 GHz >20 dB @ 10 GHz >50 dB @ 18.8 GHz >50 dB @ 28.8 GHz

Outline Drawing:

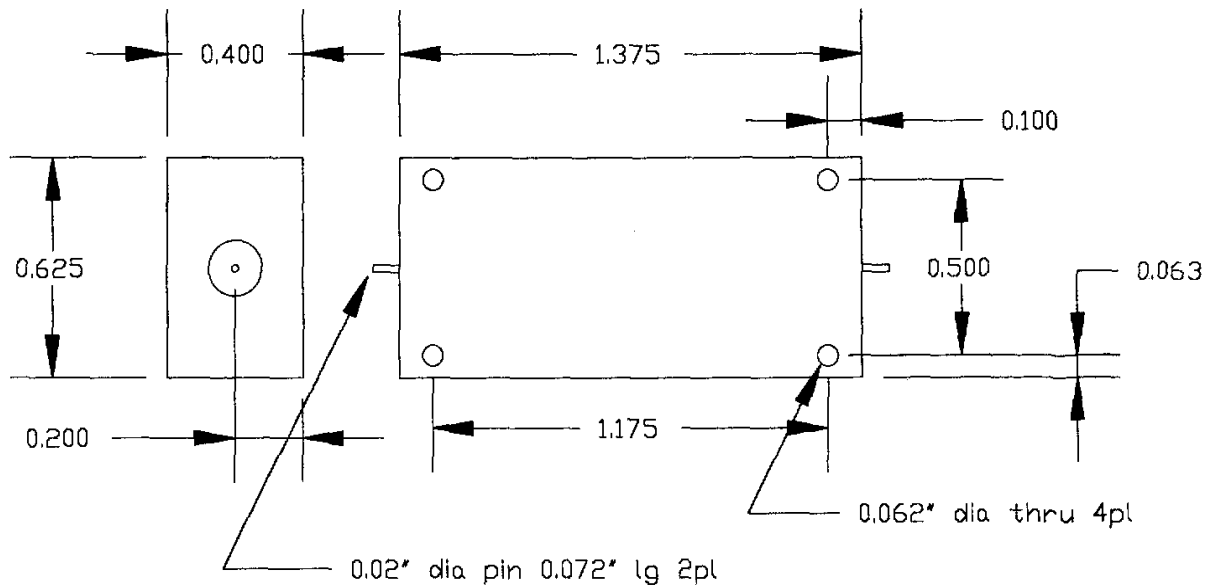



ANATECH ELECTRONICS, INC.

Manufacturer of RF & Microwave Products



9300 MHz LC Bandpass Filter

Part Number: AE9300B8783

Response Plot:

