




**Part Number: AE10L8931**

**10 MHz Lowpass Filter**

Passband:	0-10 MHz
Insertion Loss:	< 0.5dB
Return Loss @ Passband:	>15dB
Rejection:	>50dB @ 20-500 MHz
Power Handling:	200W
Dimensions:	8 x 2 x 1.5 inches
Connector Type:	Type N (F)

**Outline Drawing:**

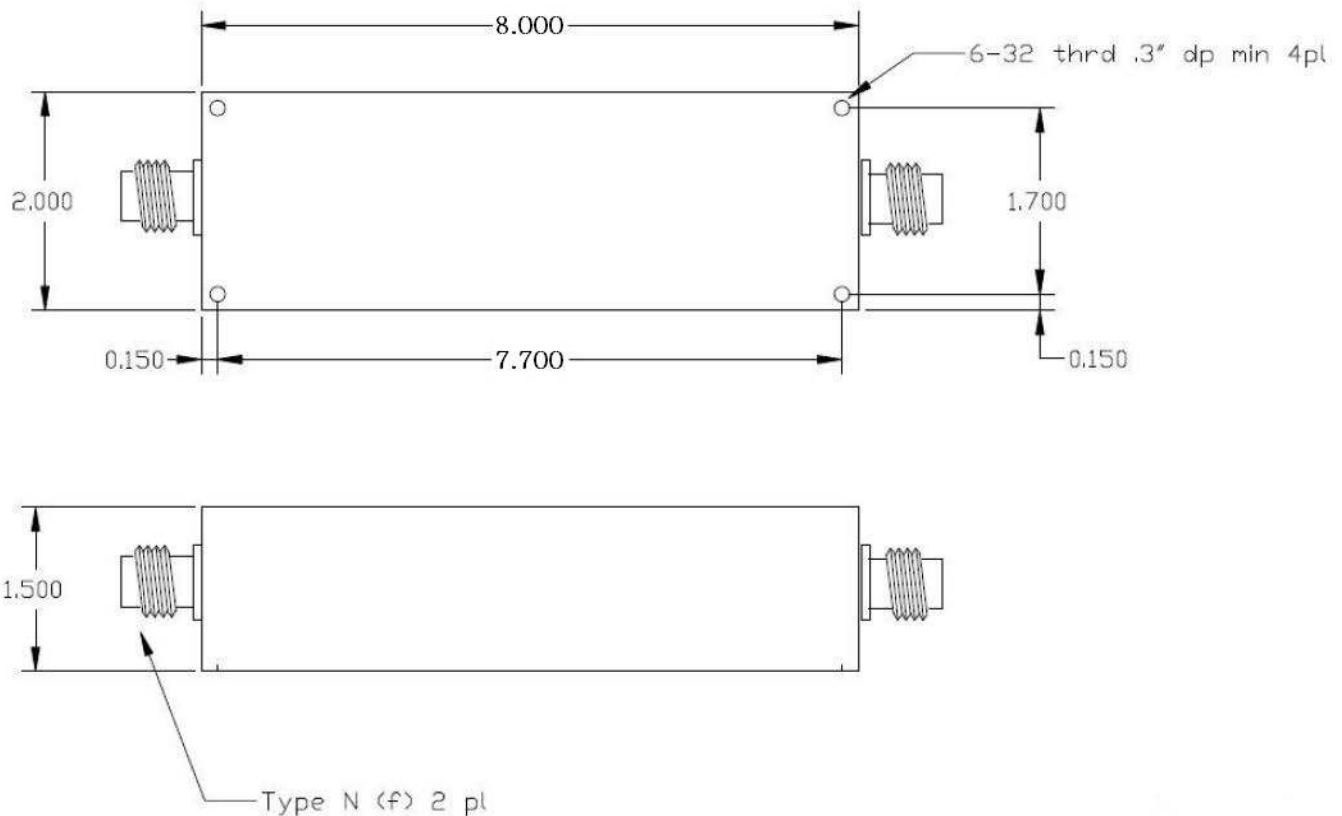



# ANATECH ELECTRONICS, INC.

Manufacturer of RF & Microwave Products



Part Number: AE10L8931

10 MHz Lowpass Filter

Response Plot:

