# Wireless External Dual Band Antenna for 5.15 GHz and 5.85 GHz Applications

Pulse Part Number W1028B





The W1028B is a classically designed antenna optimized for environments ranging from residential to commercial. It offers near dipolar radiation properties for wireless access points and devices on a WLAN (Wireless Local Area Network).

Wireless networks, especially those located indoors, often have physical barriers which inhibit communication between wireless devices. These barriers cause blind spots, intermittent signal quality and interference. Selecting the correct external antenna can improve the range and reliability of wireless networks.

The W1028B antenna offers an economical solution for OEMs of wireless devices. These antennas are best suited for IEEE 802.11a applications.

#### **Features**

- · High frequency and high gain antenna
- For WLAN devices using WiFi (802.11a) and ISM 5.8 GHz band
- Omni directional radiation pattern provides broad 360° coverage
- RoHS Compliant Product

### **Applications**

- WLAN / WIFI Routers
- Wireless Repeaters
- 802.11a OEM replacements

### **Electrical Specifications**

Frequency [MHz]	5150 - 5850
Nominal Impedance $[\Omega]$	50
VSWR	2:1 Max
Gain [dBi]	2
Radiation Pattern	Omni
Polarization	Linear Vertical
Connector	SMA Male Reverse

## **Environmental Specifications**

Operating Temperature [°C]	-20 to +65
Storage Temperature [°C]	-30 to +75

### **Mechanical Specifications**


Color	Black
Overall Length [Inches/mm]	5.38 ± .12 / 136.8 ± 3


# Wireless External Dual Band Antenna for 5.15 GHz and 5.85 GHz Applications

Pulse Part Number W1028B

### Radiation Patterns

### **Horizontal Plane**

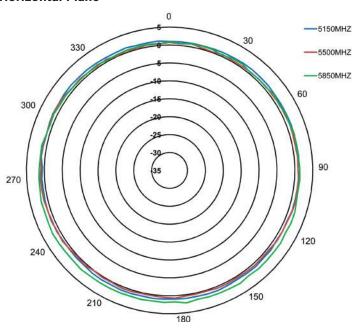

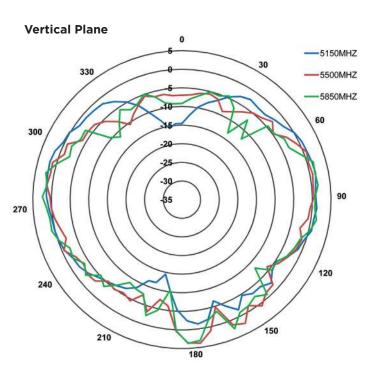

### **Application Notes**

Omni-directional antennas provide a uniform, donutshaped, 360° radiation pattern. The omni-directional pattern is suitable for point-to-multipoint broadcasting in all directions. This antenna is primarily used for WLAN applications. However, it can also be

used for a variety of other applications withing the spec ified frequency range. When used as an access point, the antenna is ideally located at the center of the coverage area.

#### For More Information

rights reserved.

Asia Headquarters **Pulse Worldwide Headquarters** Larsen Brand Antenn Europe Headquarters **Pulse North Asia** Pulse (Suzhou) Wireless Products Co, Inc. B402. Shenzhen Academy of 12220 World Trade Drive 3611 NF 112th Avenue Pulse GmbH & Do. KG 3F, No. 198, Zhongyuan Road 99 Huo Ju Road, (#29 Bldg, 4th Phase) Vancouver, WA 98682 Zhongli City, Taoyuan County 320 Suzhou New District San Diego, CA 92128 Zeppelinstrasse 15 Aerospace Technology Bldg. Science & Tech Industrial Park Herrenberg 10th Kejinan Road, High-Tech Zone Taiwan R. O. C. Nanshan District, Shenzen, PR China 518057 Jiangsu Province, Suzhou 215009 PR China Tel: 858 674 8100 Tel: 360 944 7551 Tel: 49 7032 7806 0 Tel: 86 755 33966678 Tel: 886 3 4356768 Tel: 86 512 6807 9998 Fax: 858 674 8262 Fax: 369 944 7556 Fax: 49 7032 7806 135 Fax: 86 755 33966700 Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2014. Pulse Electronics, Inc. All

