
Jumper; from 1 to 4; insulated; light gray

www.wago.com/870-434



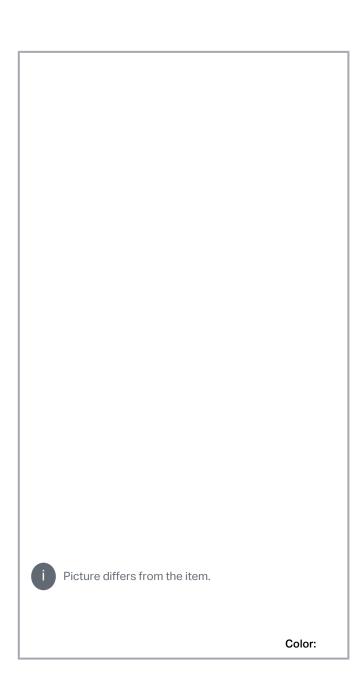

Data Electrical data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/870-434



Ratings per IEC/EN

Rated current	18 A		
Evinformation			

Ex information

Rated current (Ex e II) 13.5 A

Physical data

Width	19 mm / 0.748 inches
Height	2.5 mm / 0.098 inches
Jumper assignment	1-4

Material Data

Note (material data)

Information on material specifications can be found here

Color	light gray
Fire load	0.021 MJ
Weight	1.6 g

Commercial data

Product Group	16 (Rail Mounted Terminal Blocks with CCC)
eCl@ss 10.0	27-14-11-40
eCl@ss 9.0	27-14-11-40
ETIM 8.0	EC000489
ETIM 7.0	EC000489
PU (SPU)	25 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4066966274592
Customs tariff number	85366990990

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Downloads

Documentation

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/870-434



Additional Information		pdf 2.3 MB	Download
370-434 doc - Datei	2018 年1月4日	doc 24.1 kB	Download
870-434 X81 - Datei	2019 年2月19日	xml 2.6 kB	Download

CAD/CAE-Data

CAD data

2D/3D Models 870-434	URL	Download
CAE data		
WSCAD Universe 870-434	URL	Download
ZUKEN Portal 870-434	URL	Download
EPLAN Data Portal 870-434	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 870-434	URL	Download
Jumper; from 1 to 4; insulated; light gray		

Installation Notes

Commoning

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/870-434



Commoning with push-in type jumper bars:

Two parallel jumper slots are accommodated in one terminal block.

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side until installed.

Push-in type jumper bars 1-3-5-7 or 1-4-7

upon request

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.