


KSC945

Audio Frequency Amplifier & High Frequency OSC.

- Complement to KSA733
- Collector-Base Voltage : $V_{CBO}=60V$
- High Current Gain Bandwidth Product : $f_T=300MHz$ (TYP)
- Suffix “-C” means Center Collector (1. Emitter 2. Collector 3. Base)



NPN Epitaxial Silicon Transistor

Absolute Maximum Ratings $T_a=25^\circ C$ unless otherwise noted

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	60	V
V_{CEO}	Collector-Emitter Voltage	50	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current	150	mA
P_C	Collector Power Dissipation	250	mW
T_J	Junction Temperature	150	$^\circ C$
T_{STG}	Storage Temperature	-55 ~ 150	$^\circ C$

Electrical Characteristics $T_a=25^\circ C$ unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
BV_{CBO}	Collector-Base Breakdown Voltage	$I_C=100\mu A, I_E=0$	60			V
BV_{CEO}	Collector-Emitter Breakdown Voltage	$I_C=10mA, I_B=0$	50			V
BV_{EBO}	Emitter-Base Breakdown Voltage	$I_E=10\mu A, I_C=0$	5			V
I_{CBO}	Collector Cut-off Current	$V_{CB}=40V, I_E=0$			0.1	μA
I_{EBO}	Emitter Cut-off Current	$V_{EB}=3V, I_C=0$			0.1	μA
h_{FE}	DC Current Gain	$V_{CE}=6V, I_C=1.0mA$	40		700	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=100mA, I_B=10mA$		0.15	0.3	V
f_T	Current Gain Bandwidth Product	$V_{CE}=6V, I_C=10mA$		300		MHz
C_{ob}	Output Capacitance	$V_{CB}=6V, I_E=0, f=1MHz$		2.5		pF
NF	Noise Figure	$V_{CE}=6V, I_C=0.5mA, f=1KHz, R_S=500\Omega$		4.0		dB

h_{FE} Classification

Classification	R	O	Y	G	L
h_{FE}	40 ~ 80	70 ~ 140	120 ~ 240	200 ~ 400	350 ~ 700

Typical Characteristics

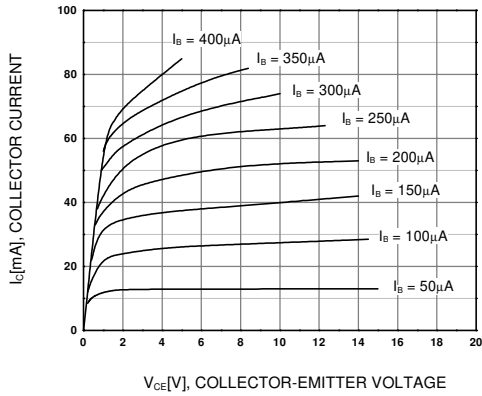


Figure 1. Static Characteristic

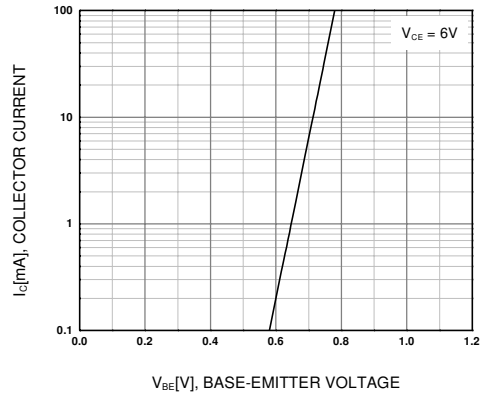


Figure 2. Transfer Characteristic

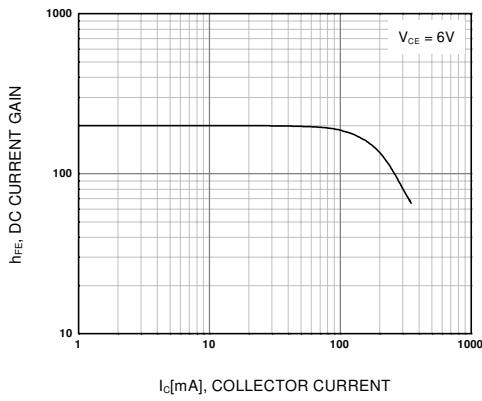


Figure 3. DC current Gain

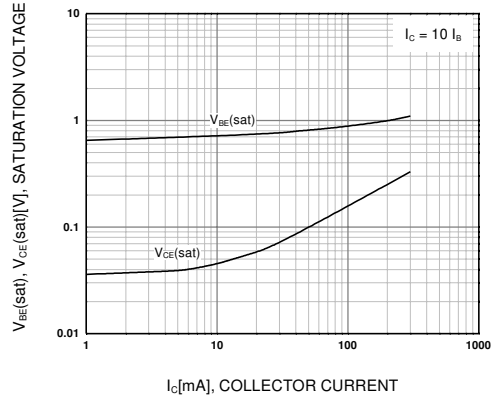


Figure 4. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

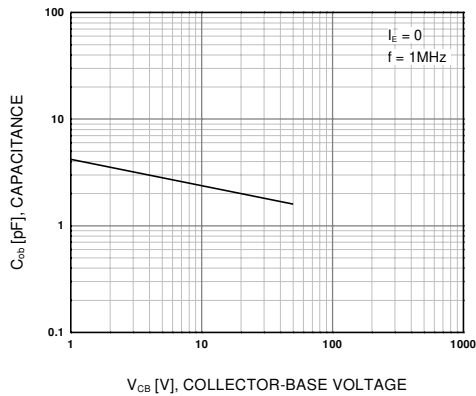


Figure 5. Output Capacitance


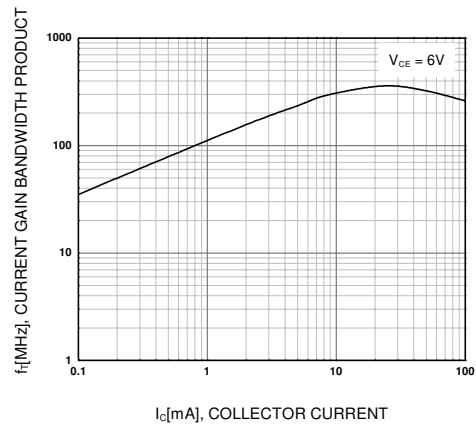


Figure 6. Current Gain Bandwidth Product

Package Dimensions

TO-92

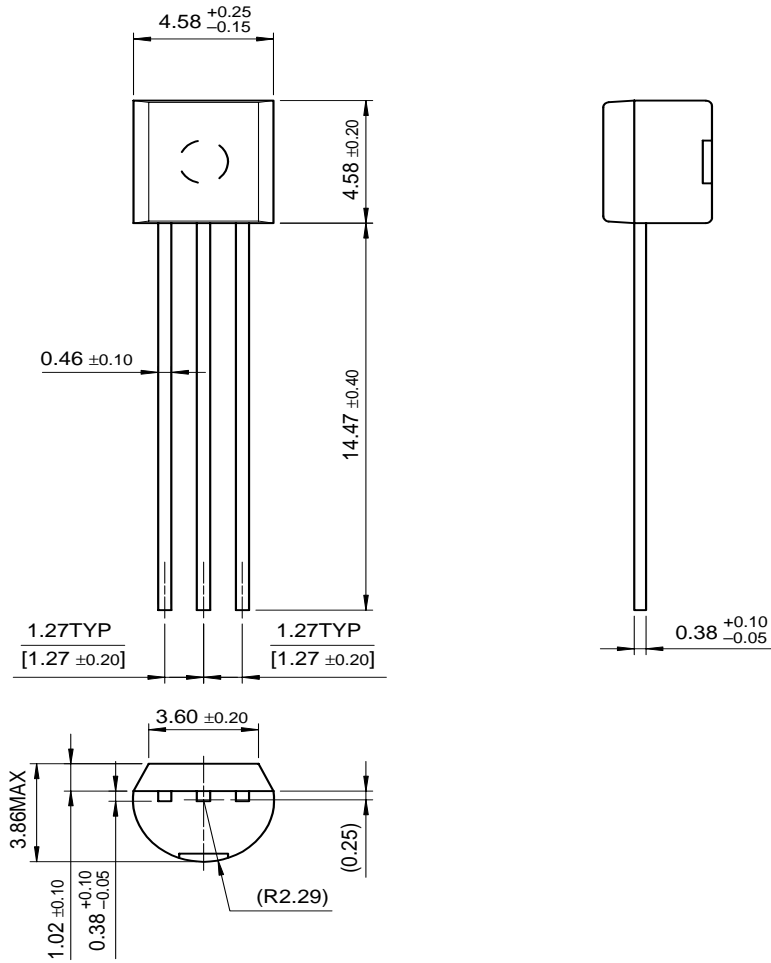

Dimensions in Millimeters

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACE ^x TM	FACT TM	ImpliedDisconnect TM	PACMAN TM	SPM TM
ActiveArray TM	FACT Quiet series TM	ISOPLANAR TM	POP TM	Stealth TM
Bottomless TM	FAST [®]	LittleFET TM	Power247 TM	SuperSOT TM -3
CoolFET TM	FAST ^r TM	MicroFET TM	PowerTrench [®]	SuperSOT TM -6
CROSSVOL TM	FRFET TM	MicroPak TM	QFET TM	SuperSOT TM -8
DOME TM	GlobalOptoisolator TM	MICROWIRE TM	QS TM	SyncFET TM
EcoSPARK TM	GTO TM	MSX TM	QT Optoelectronics TM	TinyLogic TM
E ² CMOS TM	HiSeC TM	MSXPro TM	Quiet Series TM	TruTranslation TM
EnSigna TM	I ² C TM	OCX TM	RapidConfigure TM	UHC TM
Across the board. Around the world. TM		OCXPro TM	RapidConnect TM	UltraFET [®]
The Power Franchise TM		OPTOLOGIC [®]	SILENT SWITCHER [®]	VCX TM
Programmable Active Droop TM		OPTOPLANAR TM	SMART START TM	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

Home >> Find products >>

KSC945

NPN Epitaxial Silicon Transistor

Contents

- [Features](#)
- [Applications](#)
- [Product status/pricing/packageing](#)
- [Order Samples](#)
- [Models](#)
- [Application notes](#)
- [Qualification Support](#)

Features

- Complement to KSA733
- Collector-Base Voltage : $V_{CBO} = 60V$
- High Current Gain Bandwidth Product : $f_T = 300MHz$ (TYP.)
- Suffix "-C" means Center Collector (1. Emitter 2. Collector 3. Base)

[back to top](#)

Applications

**Audio Frequency Amplifier
& High Frequency OSC.**

[back to top](#)

Product status/pricing/packageing

BUY

BUY

Datasheet

[Download this datasheet](#)



[e-mail this datasheet](#)



This page

[Print version](#)

Related Links

[Request samples](#)

[How to order products](#)

[Product Change Notices \(PCNs\)](#)












[Support](#)





[Sales support](#)

[Quality and reliability](#)

[Design center](#)

Product	Product status	Pb-free Status	Pricing*	Package type	Leads	Packing method	Package Marking Convention**
KSC945CGBU	Full Production	Full Production	\$0.0255	TO-92	3	BULK	Line 1: C945 Line 3: GC&3
KSC945CGTA	Full Production		\$0.0265	TO-92	3	AMMO	Line 1: C945 Line 3: GC&3

		 Full Production					
KSC945CLTA	Full Production	 Full Production	\$0.025	TO-92	3	AMMO	Line 1: C945 Line 3: LC&3
KSC945COTA	Full Production	 Full Production	\$0.025	TO-92	3	AMMO	Line 1: C945 Line 3: OC&3
KSC945CYBU	Full Production	 Full Production	\$0.0255	TO-92	3	BULK	Line 1: C945 Line 3: YC&3
KSC945CYTA	Full Production	 Full Production	\$0.0265	TO-92	3	AMMO	Line 1: C945 Line 3: YC&3
KSC945CYTA_NL	Full Production	 Full Production	N/A	TO-92	3	AMMO	Line 1: C945 Line 3: YC&3
KSC945GBU	Full Production	 Full Production	\$0.0255	TO-92	3	BULK	Line 1: C945 Line 3: G-&3
KSC945GTA	Full Production	 Full Production	\$0.0265	TO-92	3	AMMO	Line 1: C945 Line 3: G-&3
KSC945LBU	Full Production	 Full Production	\$0.0255	TO-92	3	BULK	Line 1: C945 Line 3: L-&3
KSC945LTA	Full Production	 Full Production	\$0.0265	TO-92	3	AMMO	Line 1: C945 Line 3: L-&3
KSC945OBU	Full Production	 Full Production	\$0.0255	TO-92	3	BULK	Line 1: C945 Line 3: O-&3

KSC945OTA	Full Production	 Full Production	\$0.0265	TO-92	3	AMMO	Line 1: C945 Line 3: O-&3
KSC945YBU	Full Production	 Full Production	\$0.0255	TO-92	3	BULK	Line 1: C945 Line 3: Y-&3
KSC945YTA	Full Production	 Full Production	\$0.0265	TO-92	3	AMMO	Line 1: C945 Line 3: Y-&3
KSC945YTA_NL	Full Production	 Full Production	N/A	TO-92	3	AMMO	Line 1: C945 Line 3: Y-&3

* Fairchild 1,000 piece Budgetary Pricing

** A sample button will appear if the part is available through Fairchild's on-line samples program. If there is no sample button, please contact a [Fairchild distributor](#) to obtain samples



Indicates product with Pb-free second-level interconnect. For more information [click here](#).

Package marking information for product KSC945 is available. [Click here for more information](#).

[back to top](#)

Models

Package & leads	Condition	Temperature range	Vcc range	Software version	Revision date
PSPICE					
TO-92-3	Electrical/Thermal	-55°C to 150°C	0V to 20V	9.2	Jan 15, 2004

[back to top](#)

Application notes

- [AB-35: CRT Monitors \(150 K\)](#) Jul 27, 2007
- [AB-38: Color TV Applications \(134 K\)](#) Jul 27, 2007
- [AB-39: Color TV Applications \(141 K\)](#) Jul 27, 2007
- [AB-40: Color TV Applications \(143 K\)](#) Jul 27, 2007
- [AB-41: Color TV Applications \(141 K\)](#) Jul 27, 2007
- [AB-42: Color TV Applications \(142 K\)](#) Jul 27, 2007
- [AB-43: Color TV Applications \(143 K\)](#) Jul 27, 2007
- [AB-57: Color-TV Applications \(FSCQ565RT - 59 Watts\)](#) (253 K) Jul 27, 2007

[AB-58: Color-TV Applications \(FSCQ765RT - 83 Watts\)](#) (266 K) Jul 27, 2007
[AB-59: Color-TV Applications \(FSCQ965RT - 102 Watts\)](#) (240 K) Jul 27, 2007
[AB-60: Color-TV Applications \(FSCQ1265RT - 132 Watts\)](#) (246 K) Jul 27, 2007
[AB-61: Color-TV Applications \(FSCQ1465RT - 146 Watts\)](#) (245 K) Jul 27, 2007
[AB-62: Color-TV Applications \(FSCQ1565RT - 160 Watts\)](#) (231 K) Jul 27, 2007
[AB-63: Color-TV Applications \(FSCQ1565RP - 198 Watts\)](#) (232 K) Jul 27, 2007
[AN-4116: A Fairchild Power Switch \(FPS\) based on Switched Mode Power Supply for LCD Monitor Use](#) (245 K) Jul 27, 2007
[AN-4146: Design Guidelines for Quasi-Resonant Converters Using FSCQ-series Fairchild Power Switch \(FPStm\)](#) (370 K) Jul 27, 2007
[AN-4149: Design Guidelines for Quasi-Resonant Converters Using KA5Q-series Fairchild Power Switch \(FPStm\)](#) (307 K) Jul 27, 2007

[back to top](#)

Qualification Support

Click on a product for detailed qualification data

Product
KSC945CGBU
KSC945CGTA
KSC945CLTA
KSC945COTA
KSC945CYBU
KSC945CYTA
KSC945CYTA_NL
KSC945GBU
KSC945GTA
KSC945LBU
KSC945LTA
KSC945OBU
KSC945OTA
KSC945YBU
KSC945YTA
KSC945YTA_NL

[back to top](#)

© 2007 Fairchild Semiconductor



[Products](#) | [Design Center](#) | [Support](#) | [Company News](#) | [Investors](#) | [My Fairchild](#) | [Contact Us](#) | [Site Index](#) | [Privacy Policy](#) | [Site Terms & Conditions](#) | [Standard Terms & Conditions](#) | [Contact Us](#)