



**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

## 398 MHz LC Band Pass Filter

Part Number: AE398B9525



### Electrical Specifications

**Center Frequency:** 398 MHz  
**Passband:** 393-403 MHz  
**Insertion Loss:** 1.15dB Max.  
**Return Loss:** 14dB Min. @ 393-403 MHz  
**Rejection:** 60 dB Min. @ 0-305 MHz  
**Power Handling:** 15 Watts  
**Impedance:** 50 Ohms


### Mechanical

**Mounting Method:** Threaded Holes  
**Connector Type:** SMA(F)  
**Dimensions:** 4.00" X 1.25" x 0.75"

### Environmental

**Operating Temperature:** -25°C to +70°C  
**Storage Temperature:** -40°C to +90°C  
**Shock:** 10 G. 11ms  
**Vibration:** 10 G. 5 to 200Hz

### Outline Drawing:

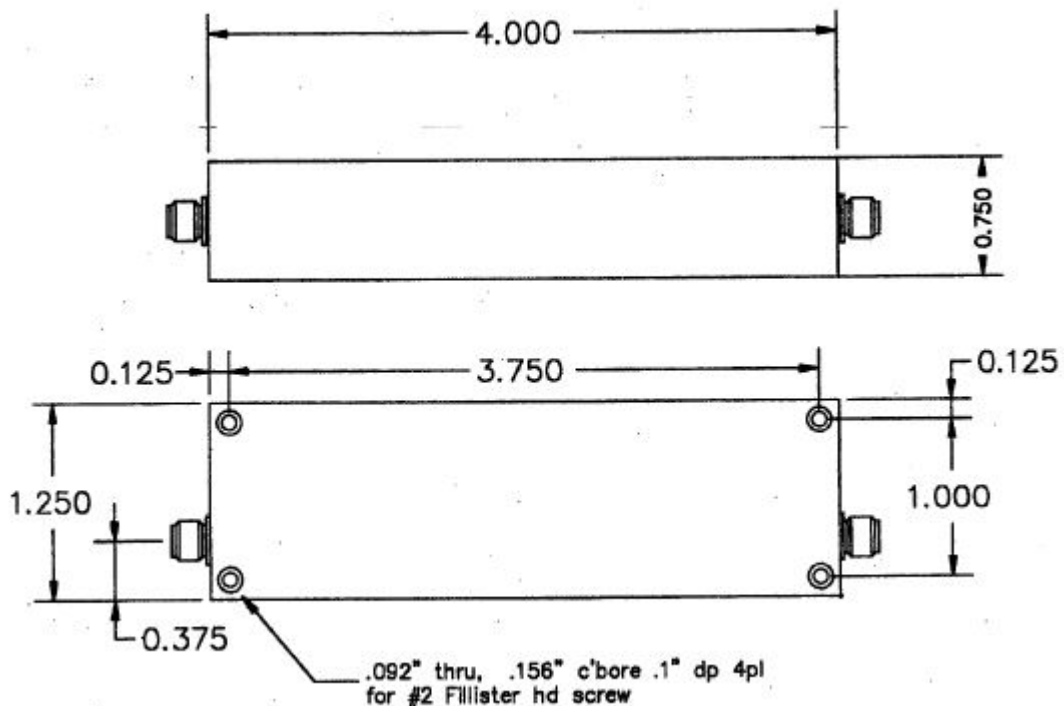

Tolerance: +/-0.01 inches [+/-0.3mm]

Angles: +/-1 Deg.

\*Tolerance as shown unless otherwise specified in the datasheet electrical specification tables above.

\*When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.

70 Outwater Lane Phone: (973) 772-4242  
 Garfield, NJ 07026 Fax : (973) 321-3941

Email: [sales@anatechelectronics.com](mailto:sales@anatechelectronics.com)  
 Web: [www.anatechelectronics.com](http://www.anatechelectronics.com)



**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

# 398 MHz LC Band Pass Filter

Part Number: AE398B9525



## Response Plot :

