


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.




All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

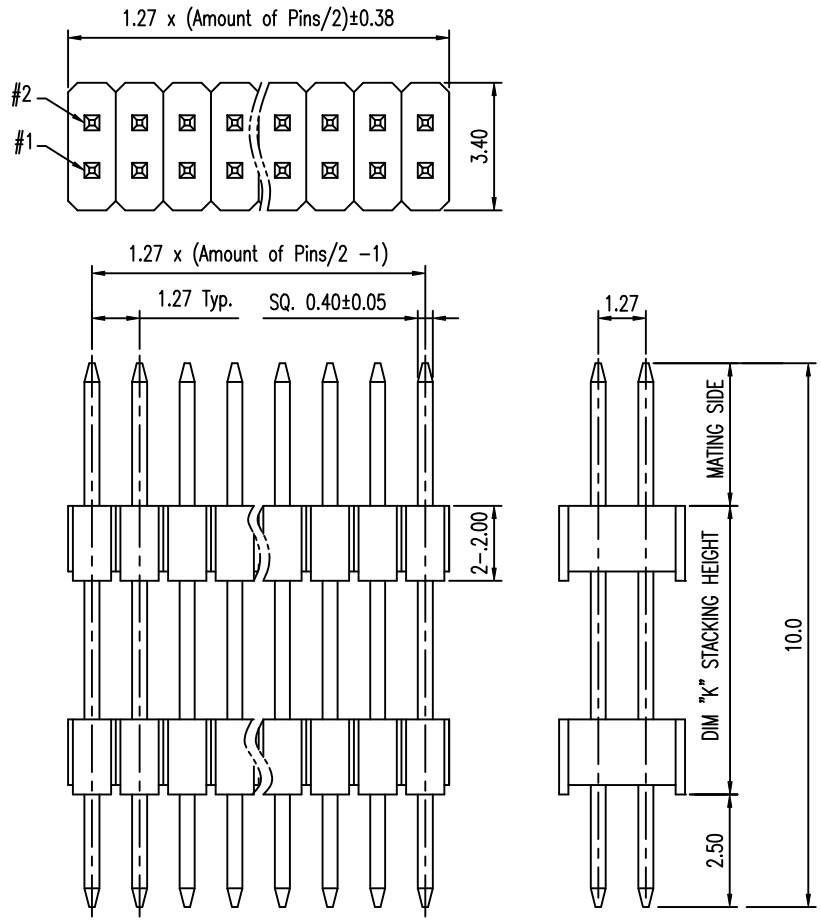

- NOTE:
- MATERIAL, HOUSING: HIGH TEMP THERMAL PLASTIC, UL94-V0
TERMINAL: COPPER ALLOY
 - FINISH: TERMINAL: GOLD AT CONTACT, G/F OVER $1\mu\text{M}(40\text{u}''\text{MIN})$ NI OVER ALL
 - SPEC.:
PRODUCT SPEC: GS-12-629
PACKING SPEC: GS-14-1517
 - THE HSG. WILL WITHSTAND EXPOSURE TO 260C PEAK TEMP. FOR 10 SEC. IN A WAVE SOLDER APPLICATION.
 - MATING SIDE LENGTH: 2.5MM MIN.
 - PRODUCT NUMBERING:
200218 1 1 - XXX XX X X LF

LEAD FREE
 PLATING:
 1: G/F ALL OVER
 4: 0.25UM(10U'') GOLD AT CONTACT
 8: 0.76UM(30U'') GOLD AT CONTACT
 PACKING
 T: TUBE
 PIN COUNT
 04, 06, 08, ..., 98, A0
 (EVERY EVEN PIN)
 STACK HEIGHT "K"
 EXAMPLE: 045=4.5MM
 IN 0.5MM INCREMENT

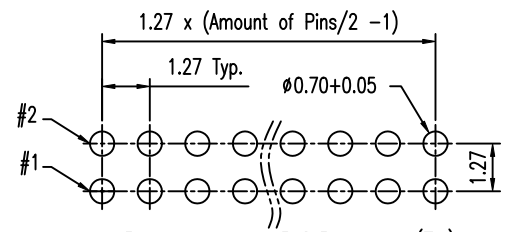

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com		
ltr	ecn no	dr	date	linear	.X ± 0.38	projection	title		
A	T10-0065	S.LIN	10'-5-20		.XX ± 0.25		1.27X1.27MM BTB STACK HD		
					.XXX ± 0.15		VT, TH		
				angles	0' $\pm 2'$	MM	product family 585		
				dr	STERLING LIN		10'-5-20	code	
				engr	STERLING LIN		10'-5-20	size TWN	
				chr	STERLING LIN	10'-5-20	scale		
				appd	GARY HSIEH	10'-5-20	NA		
sheet index	revision sheet	A	1				A4	20021811	
								1 of	