


| ITEM | PART# | DESCRIPTION | QTY | UOM |
|------|------------|---------------------------------|-----|-----|
| A | 5055700801 | 2.0W/B SINGLE REC HSG 8CKTBLK | 1 | PC |
| B | 5055721000 | 2.0W/B REC CRIMP TERM CHAIN H>F | 8 | PC |
| C | -- | PAPER PRINTED PAPER WHITE | 1 | PC |

| FROM | TO | DESCRIPTION | COLOR |
|------|----|--------------------------------|-------|
| A1 | -- | 1X22AWG DISC SR-PVC BK UL10002 | BLACK |
| A2 | -- | 1X22AWG DISC SR-PVC BK UL10002 | BLACK |
| A3 | -- | 1X22AWG DISC SR-PVC BK UL10002 | BLACK |
| A4 | -- | 1X22AWG DISC SR-PVC BK UL10002 | BLACK |
| A5 | -- | 1X22AWG DISC SR-PVC BK UL10002 | BLACK |
| A6 | -- | 1X22AWG DISC SR-PVC BK UL10002 | BLACK |
| A7 | -- | 1X22AWG DISC SR-PVC BK UL10002 | BLACK |
| A8 | -- | 1X22AWG DISC SR-PVC BK UL10002 | BLACK |

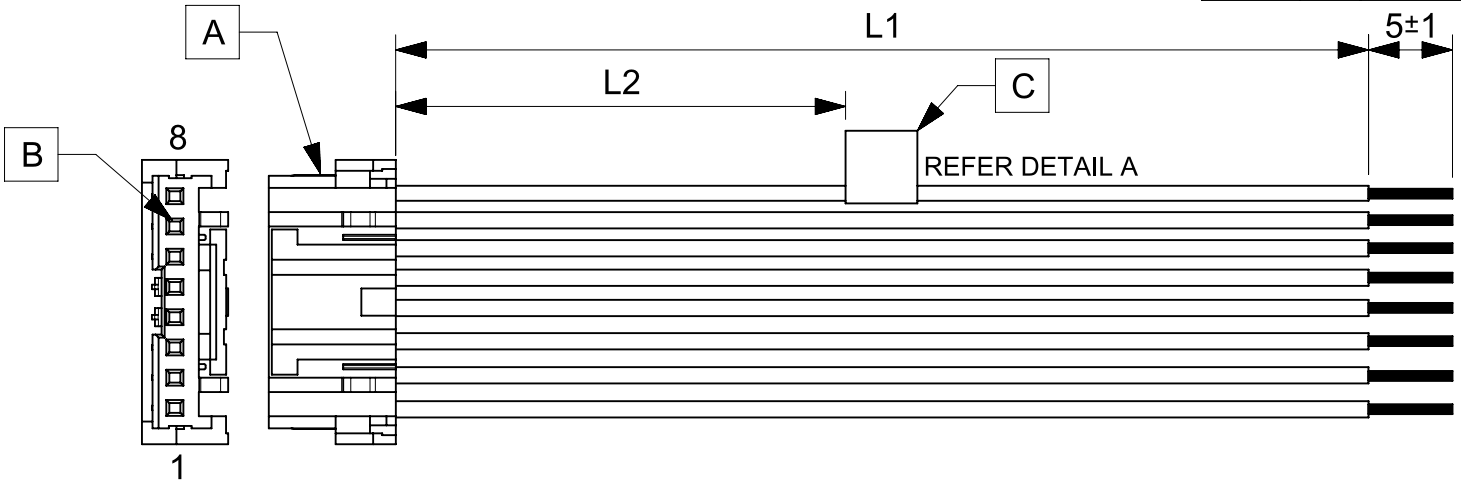

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

| TABLE | | | |
|-------------|--------|---------|--|
| PART NUMBER | L1 | L2(REF) | TITLE |
| 2181021080 | 50±3 | 12 | MICROLOCK PLUS 2.0 RS 8CKT 50MM DISC Sn |
| 2181021081 | 100±5 | 37 | MICROLOCK PLUS 2.0 RS 8CKT 100MM DISC Sn |
| 2181021082 | 150±8 | 62 | MICROLOCK PLUS 2.0 RS 8CKT 150MM DISC Sn |
| 2181021083 | 300±10 | 137 | MICROLOCK PLUS 2.0 RS 8CKT 300MM DISC Sn |
| 2181021084 | 600±10 | 287 | MICROLOCK PLUS 2.0 RS 8CKT 600MM DISC Sn |

| REVISION | | | |
|------------|-----|-----------------|---------|
| DATE | REV | DESCRIPTION | CHANGER |
| 2021/03/12 | A | INITIAL RELEASE | AS20 |

NOTES

- CONNECTOR VIEW SHOWN IS FROM MATING SIDE.
- FREE ENDS MUST BE STRIPPED, TWISTED & TINNED. THE LENGTH OF TINNING IS 5±1MM. TINNING DIA MUST BE 0.9MM MAX.
- LABEL TEXT MUST BE 2MM MAX IN HEIGHT WITH ARIAL FONT.
- LABEL MUST BE WRAPPED IN FLAG TYPE.

| | | | |
|---|---|----------------|----------------------------|
| FUNCTIONAL SYMBOLS | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | |
| $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ | DIMENSION UNITS | SCALE | CURRENT REV DESC: |
| | mm | NTS | |
| | GENERAL TOLERANCES (UNLESS SPECIFIED) | | |
| | ANGULAR TOL | ± ° | |
| | 4 PLACES | ± | EC NO: 665161 |
| | 3 PLACES | ± | DRWN: AS20 2021/03/12 |
| | 2 PLACES | ± | CHK'D: RDESAI01 2021/05/26 |
| | 1 PLACE | ± | APPR: RDESAI01 2021/05/26 |
| | 0 PLACES | ± | INITIAL REVISION: |
| | | | DRWN: AS20 2021/03/12 |
| | | | APPR: RDESAI01 2021/05/26 |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | THIRD ANGLE PROJECTION | DRAWING | SERIES |
| | | A4-SIZE | 218102 |
| DOCUMENT NUMBER | | DOC TYPE | DOC PART |
| 2181021080 | | PSD | 000 |
| REVISION | | A | |
| MATERIAL NUMBER | | CUSTOMER | SHEET NUMBER |
| SEE TABLE | | GENERAL MARKET | 1 OF 1 |

| | | | | |
|-----------------|----|--------------|------------|----------|
| DOCUMENT STATUS | P1 | RELEASE DATE | 2021/05/26 | 12:08:21 |
|-----------------|----|--------------|------------|----------|