

NOTES:

1. MATERIALS AND FINISHES:

- HEX NUT
- BRASS, NICKEL PLATING
- LOCKWASHER
- BRASS, NICKEL PLATING
- BODY
- BRASS, NICKEL PLATING
- CONTACT
- BeCu, GOLD PLATING
- GASKET
- SILICONE RUBBER, RED
- INSULATOR
- PTFE, NATURAL


2. ELECTRICAL:

- A. IMPEDANCE: 50 OHM
- B. FREQUENCY RANGE: 0-11 GHz
- D. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.

3. MECHANICAL:

- A. DURABILITY: 500 CYCLES MIN.
- B. TEMPERATURE RANGE: -65° C TO +165° C

4. MAX. PANEL THICKNESS= 6.8mm

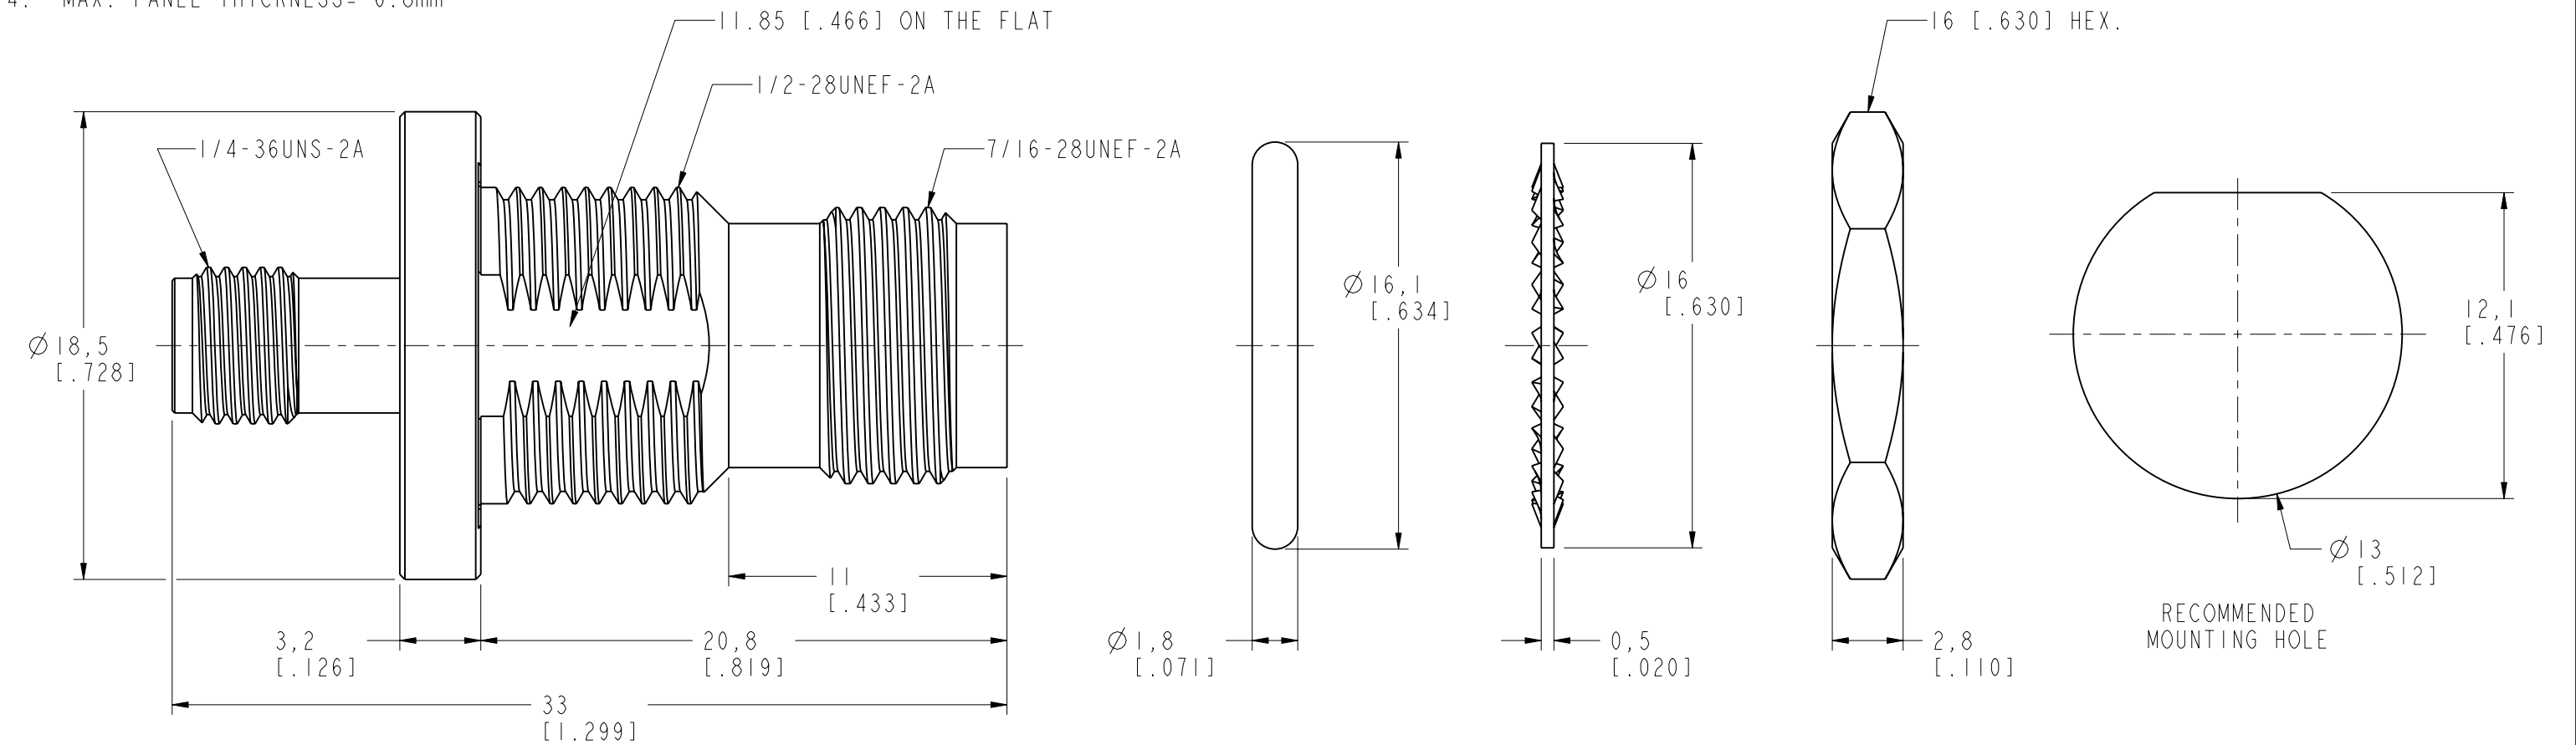

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°	MATERIAL -	DRAWN M. ZHANG	DATE 24-May-17	TITLE SMA JACK TO TNC BULKHEAD JACK ADAPTOR	Amphenol RF www.amphenolrf.com	
		ENGINEER S. DUAN	DATE 16-Aug-16		DRAWING NO. SMAF-TF8-NT3G-50	
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	REFERENCE AND	APPROVED S. HSIEH	DATE 24-May-17	SCALE: 4.0:1.0	SHEET 2 OF 2	
	CONFIGURATION LEVEL: In Work	CAD FILE		DWG SIZE B	REV B	
	FINISH					
						ITEM NO. IIF-02F8-NA-5-F
						PART NO. 242178-11