


AFCI PART NO.

10123461-R0035YYLF

WIRING LIST	
P1	P2
1	1
2	2
3	3
...	...
10	10
11	11
12	12

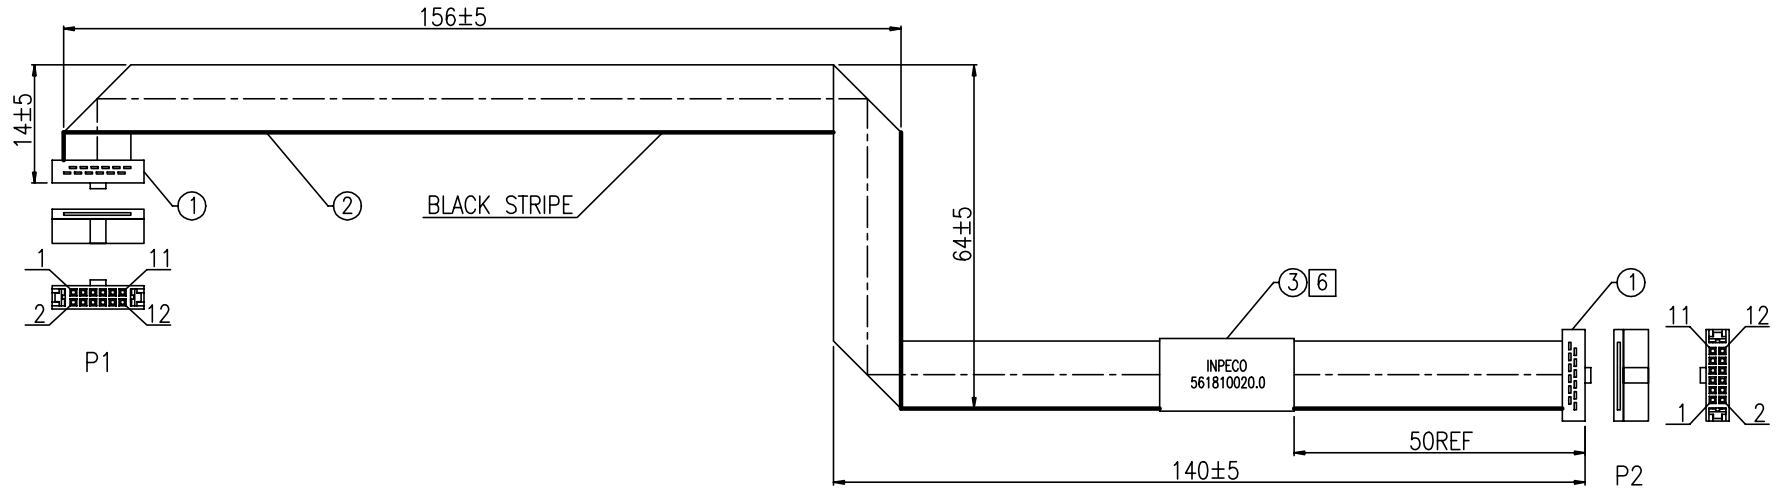

NOTES:

1. MATERIAL: SEE BOM ON SHEET 1.
2. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.
3. ALL CABLE ASSEMBLIES SHALL BE TESTED 100% FOR CONTINUITY AS DEFINED IN WIRING LIST.
4. UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE TESTED:  
 HI-POT: DC 300V/10ms  
 DIELECTRIC RESISTANCE: 10M Ohms MIN.  
 CONNECTION RESISTANCE: 4 Ohms MAX.
5. LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

**B** **6**. LABEL SHOULD BE PRINTED WITH BLACK TEXT AS SHOW BELOW:



<b>B</b>	1	EA	ADHESIVE LABEL: W=25mm, COLOR:WHITE, PRINT BLACK			3	
	A/R	FT	FLAT CABLE: UL2678, 0.635PITCH, 30AWG, 12PIN, COLOR:GRAY			2	
	2	EA	IDC CONNECTOR: 1.27PITCH, 2X6PIN, 10u" Au PLATING, COLOR:BLACK			1	
	Q'TY	UNIT	DESCRIPTION			ITEM	
mat'l. code		surface	tolerance	projection	product family		
		ISO 1302	ISO 406 ISO 1101		Cable Assembly		
ltr		ecn no	dr	date	title		
A		/	Harry	03/08'13	1.27PITCH IDC CABLE ASSEMBLY		
B		N-24535	Carl	07/20'16			
				angles	MM		
				linear	scale N/A		
			dr	Carl Wang	07/20'16	dwg no	
			enr	Carl Wang	07/20'16	sheet 1 of 1	
			chr	Caspar Lin	07/20'16	size	
			appd	Caspar Lin	07/20'16	A3	
sheet		revision	Amphenol FCI				type
index		sheet	Customer				Drawing
		1					