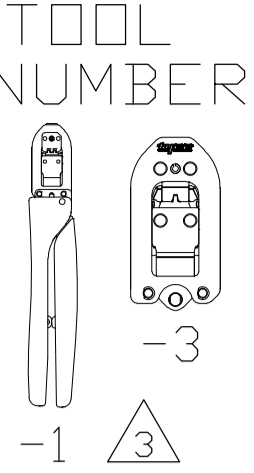

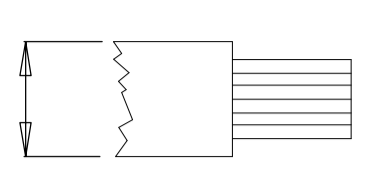

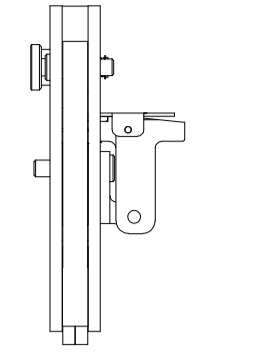



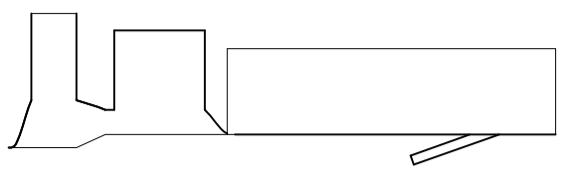
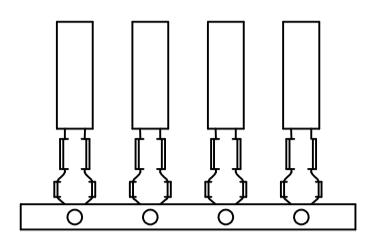





THIS DRAWING IS A CONTROLLED DOCUMENT. DWG NO. 1583004

TOOL NUMBER 	WIRE SIZE mm ² [AWG] 	INSULATION DIAMETER mm [in.] 	INSUL. ADJ. 	FLIP LOCATOR 	STRIP LENGTH mm [in.] 	CRIMP HEIGHT mm [in.] 	CONTACT PART NUMBERS 						CONTACT DESCRIPTION (loose piece color code)	APPLIC. SPECIF.
							LOOSE PIECE 			STRIP FORM 				
91505-1	0.2 - 0.6 [24-20]	1.14 - 1.78 [.045-.070]	YES	NO	3.96 ± 0.38 [.156 ± .015]	1.01 ± 0.05 [.039 ± .002]	66103-[] 66400-[] 164163-[]	66105-[] 163086-[]	66399-[] 163088-[] 170246-[] 170248-[] 66702-[]	66102-[] 66332-[] 164160-[]	66104-[] 163085-[]	66331-[] 163087-[] 170245-[] 170247-[]	Type III+ (yellow) Type X	114-10004 -
91505-3	0.8 - 1.4 [18-16]	2.03 - 2.54 [.080-.100]	YES	NO	3.96 ± 0.38 [.156 ± .015]	1.30 ± 0.05 [.051 ± .002]	66099-[] 164164-[] 66589-[]	66101-[] 163082-[] 164839-[] 170244-[] 66590-[]	163084-[] 164840-[] 170242-[]	66098-[] 164161-[] 66579-[]	66100-[] 163081-[] 163766-[] 170243-[] 66580-[]	163083-[] 163767-[] 170241-[]	Type III+ (blue and violet) Type VI	114-10004 114-10007
91515-1	0.05 - 0.38 [30-22]	1.02-1.91 [.040-.075]	NO	NO	3.50-4.75 [.140-.187]	0.79 ± 0.05 [.031 ± .002]	61173-[]	61174-[]	350078-[]	350079-[]	COMMERCIAL M-N-L		114-1012	
91515-3	0.08 - 0.24 [28-24]	0.89-1.40 [.035-.055]					66107-[] 163092-[] 66595-[]	66109-[] 164163-[] 66596-[]	163090-[] 170250-[] 170252-[]	66106-[] 163091-[] 66585-[]	66108-[] 164160-[] 66586-[]	163089-[] 170249-[] 170251-[]	Type III+ (red) Type VI	114-10004 114-10007
91515-3	0.2 - 0.6 [24-20] 0.05 - 0.15 [30-26]	1.14-1.78 [.045-.070]					66103-[] 163088-[] 66428-[] 66593-[]	66105-[] 164162-[] 66429-[] 66594-[]	163086-[] 170246-[] 170248-[]	66102-[] 163087-[] 66424-[] 66583-[]	66104-[] 164159-[] 66425-[] 66584-[]	163085-[] 170245-[] 170247-[]	Type III+ (yellow & brown) Type VI	114-10004 114-10007
91519-1	0.8 - 1.4 [18-16]	2.03-2.54 [.080-.100]	YES	NO	3.96 ± 0.38 [.156 ± .015]	1.30 ± 0.05 [.051 ± .002]	66360-[] 66361-[]			66358-[] 66359-[]		Type III+	114-10004	
91519-3	1.9 - 2.1 [14]						1.73 ± 0.05 [.068 ± .002]	66601-[] 66602-[] 213603-2 213603-4			66598-[] 66597-[] 213603-1 213603-3		Type III+	114-10004
91521-1	0.8 - 1.4 [18-16]	2.79-3.81 [.110-.150]	YES	NO	4.75 ± 0.38 [.187 ± .015]	1.30 ± 0.05 [.051 ± .002]	66400-[] 66399-[]			66332-[] 66331-[]		Type III+ (yellow)	114-10004	
91521-3	1.9 - 2.1 [14]						1.73 ± 0.05 [.068 ± .002]	163082-[] 163084-[] 66589-[]	164164-[] 66099-[] 170244-[] 66590-[]	66101-[] 170242-[]	163081-[] 163083-[] 66579-[]	164161-[] 66098-[] 170243-[] 66580-[]	66100-[] 170241-[]	Type III+ (blue) Type VI
91523-1	0.2 - 0.6 [24-20]	2.03-2.54 [.080-.100]	NO	NO	3.56-4.75 [.140-.187]	0.99 ± 0.05 [.039 ± .002]	66565-[] 66566-[]			66563-[] 66564-[]		Type III+ (yellow)	114-10004	
91523-3	0.8 - 1.4 [18-16]						1.30 ± 0.05 [.051 ± .002]	66587-[] 66588-[]	66577-[] 66578-[]		Type VI	114-10007		


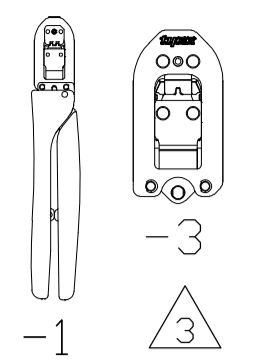

 LIST OF APPLIED CONTACT PART NUMBERS MAY NOT BE COMPLETE AND IS SUBJECT TO CHANGE. FOR CURRENT INFORMATION ON TERMINAL PART NUMBERS, CONTACT THE TOOLING ASSISTANCE CENTER : 1-800-722-1111.



2. AMP and CERTI-CRIMP are trademarks.
 -1 IS A CERTICRIMP II HAND TOOL ASSEMBLY.
 -3 IS A CERTICRIMP II HEAD SUB-ASSEMBLY.
 4. THE HAND TOOL INSTRUCTION SHEET, ALSO KNOWN AS AN "IS", FOR MOST CERTI-CRIMP II TOOLS USE IS 408-8547. IF THE TOOL HAS A FLIP LOCATOR USE IS 408-10414.

CERTI-CRIMP II DATA SHEET


DWN: M. YOUNGER 21FEB2012		MATERIAL: -	HEAT TREAT: -
CHK: B.A. WOLFE 22FEB2012		 TE Connectivity	
APVD: B.A. WOLFE 22FEB2012			
NAME: CERTI-CRIMP II TOOL DATA SHEET			
MULTIMATE CONTACT FAMILY OPEN BARREL			
SCALE: -		SIZE: A1	DRAWING NO: 1583004
SHEET: 1		OF: 2	REV: D1

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TE CONNECTIVITY AND ITS AFFILIATES. IT IS NOT TO BE DISCLOSED TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN AUTHORIZATION FROM TE CONNECTIVITY.

TOOL NUMBER	WIRE SIZE mm ² [AWG]	INSULATION DIAMETER mm [in.]	INSUL. ADJ.	FLIP LOCATOR	STRIP LENGTH mm [in.]	CRIMP HEIGHT mm [in.]	CONTACT PART NUMBERS 		CONTACT DESCRIPTION (loose piece color code)	APPLIC. SPECIF.										
							LOOSE PIECE	STRIP FORM												
 -1  91564-1 91564-3	0.20-0.56 [24-20]	1.02-2.03 [.040-.080]	NO	NO	3.55-4.75 [.140-.187]	1.00 ± 0.05 [.039 ± .002]	66103-[]	66593-[]	66596-[]	66102-[]	66583-[]	66586-[]	Type III+ (yellow) (red)	114-10004						
	0.05-0.15 [30-26]	1.02-1.52 [.040-.060]					66105-[]	170246-[]	66594-[]	66104-[]	170245-[]	66584-[]			66429-[]	170248-[]	66425-[]	170247-[]	66585-[]	66424-[]
	0.12-0.22 [26-24]	0.89-1.40 [.035-.055]					66107-[]	66237-[]	170252-[]	66106-[]	170249-[]	66108-[]			170251-[]					
2844982-1	0.30 [22]	1.27-2.79 [.050-.110]	NO	NO	4.37 [.172]	0.94 ± 0.05 [.037 ± .002]	66591-[]		66581-[]		TYPE VI INSULATION GRIP CONTACTS	114-10007								
	0.60-0.80 [20-18]	1.27-2.79 [.050-.110]					66592-[]		66582-[]											

-  LIST OF APPLIED CONTACT PART NUMBERS MAY NOT BE COMPLETE AND IS SUBJECT TO CHANGE. FOR CURRENT INFORMATION ON TERMINAL PART NUMBERS, CONTACT THE TOOLING ASSISTANCE CENTER : 1-800-722-1111.
2. AMP and CERTI-CRIMP are trademarks.
-  -1 IS A CERTICRIMP II HAND TOOL ASSEMBLY. -3 IS A CERTICRIMP II HEAD SUB-ASSEMBLY.
4. THE HAND TOOL INSTRUCTION SHEET, ALSO KNOWN AS AN "IS", FOR MOST CERTI-CRIMP II TOOLS USE IS 408-8547. IF THE TOOL HAS A FLIP LOCATOR USE IS 408-10414.

CERTI-CRIMP II DATA SHEET

DWN: M. YOUNGER 21FEB2012		MATERIAL: -	HEAT TREAT: -
CHK: B.A.WOLFE 22FEB2012			
APVD: B.A. WOLFE 22FEB2012		 TE Connectivity	
NAME: CERTI-CRIMP II TOOL DATA SHEET MULTIMATE CONTACT FAMILY OPEN BARREL			
SCALE: -	SIZE: A1	DRAWING NO: 1583004	SHEET: 2 of 2 REV: D1

0	PLC	±	-
1	PLC	±	-
2	PLC	±	-
3	PLC	±	-
4	PLC	±	-

REVISION RECORD	DATE	DWN	APVD	SURFACE TEXTURE	✓
- SEE SHEET 1	-	-	-		

THIS DRAWING IS A CONTROLLED DOCUMENT. DRAW NO 1583004

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TE. IT IS THE PROPERTY OF TE CONNECTIVITY AND IS NOT TO BE DISCLOSED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN AUTHORIZATION FROM TE. www.te.com