

LOC		DIST		REVISIONS			
F	LTR	DESCRIPTION	DATE	DN	APVD		
A		REVISED PER ECO-05-10413	9/30/05	SS	ISRY		

HEADER:
MATERIALS:
 HEADER: COPPER ALLOY, GOLD PLATED,
 94V-0 THERMOPLASTIC.
 CONNECTOR: COPPER ALLOY, GOLD PLATED,
 94V-0 THERMOPLASTIC.

ELECTRICAL:
 RATING: 1 AMPERE MAX. (CONNECTOR).

MECHANICAL:
 WIRE RANGE: 26-30 AWG SOLID, 28 AWG STRANDED.





TERMINAL BLOCK:
MATERIALS:
 HOUSING: THERMOPLASTIC NYLON, BLACK, 94V-0.
 TERMINALS: COPPER ALLOY, TIN PLATED.
 SCREWS: 3M, BRASS, NICKEL PLATED.

ELECTRICAL:
 RATING: 10A, 300V(UL).

MECHANICAL:
 WIRE RANGE: 14-22 AWG.

MOUNTING:
MATERIALS:
 MOUNTING: 2TK2 AND 2TK2D SERIES SNAPTRACK
 (SOLD SEPARATELY).

- ⚠ ALL CONNECTOR/STRAIN RELIEF COMPONENTS TO BE SHIPPER LOOSE AND UNASSEMBLED.
- ⚠ CATALOG NUMBER MARKED HERE.
- ⚠ CONTAINS NO TIN-LEAD PLATING.

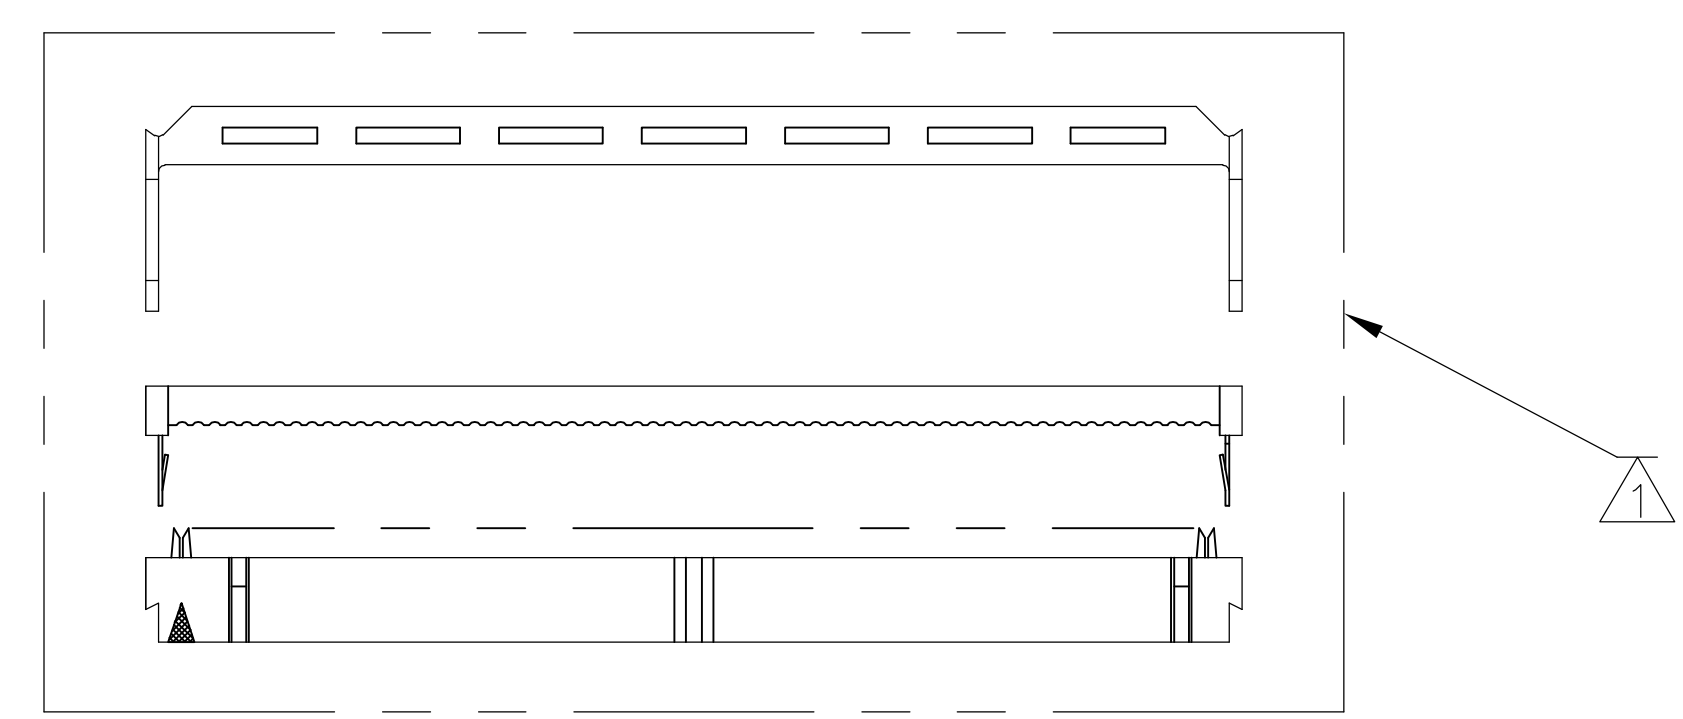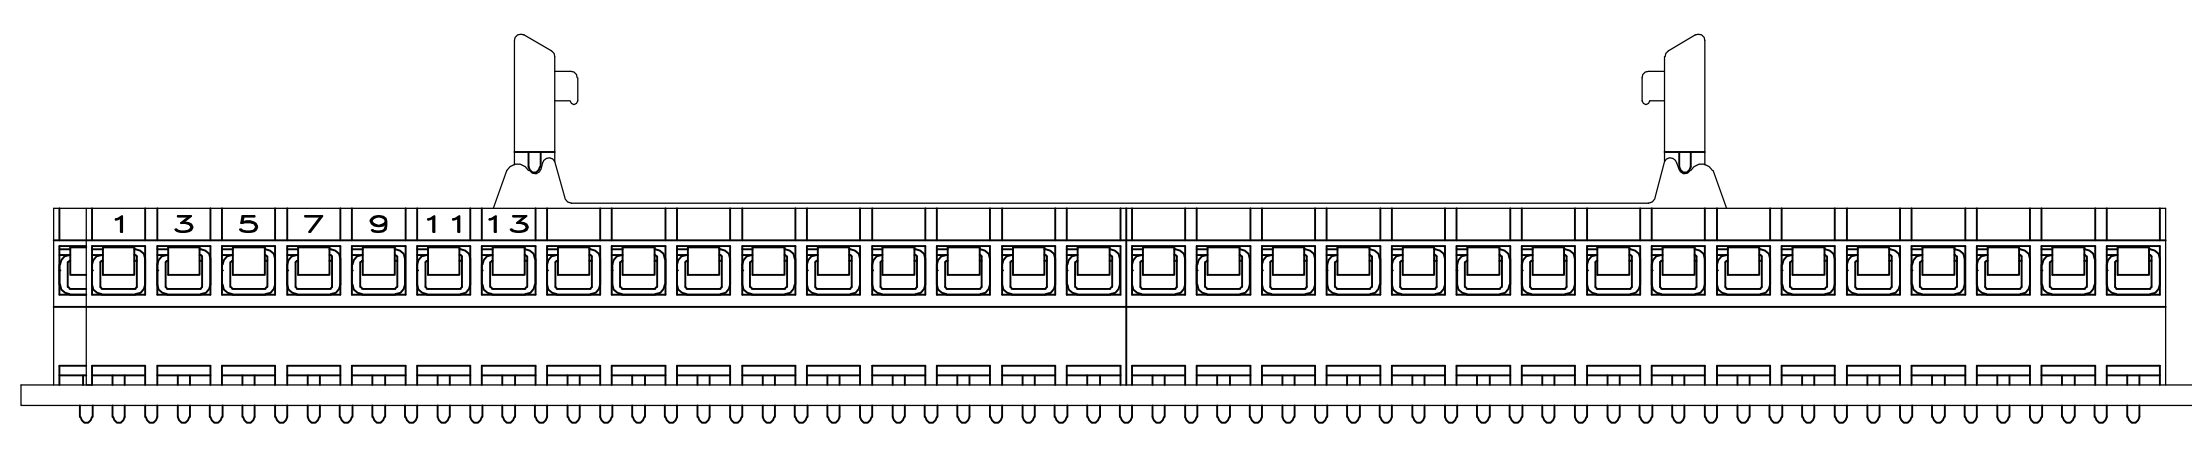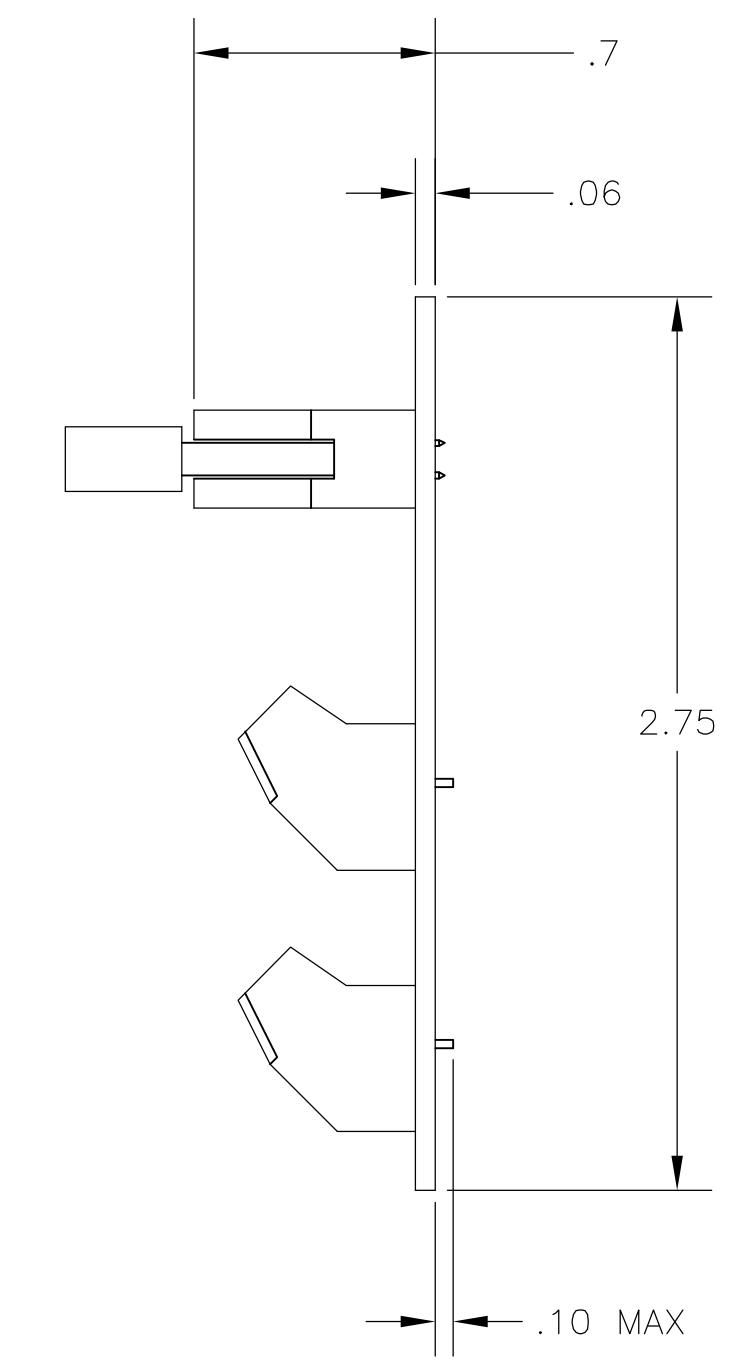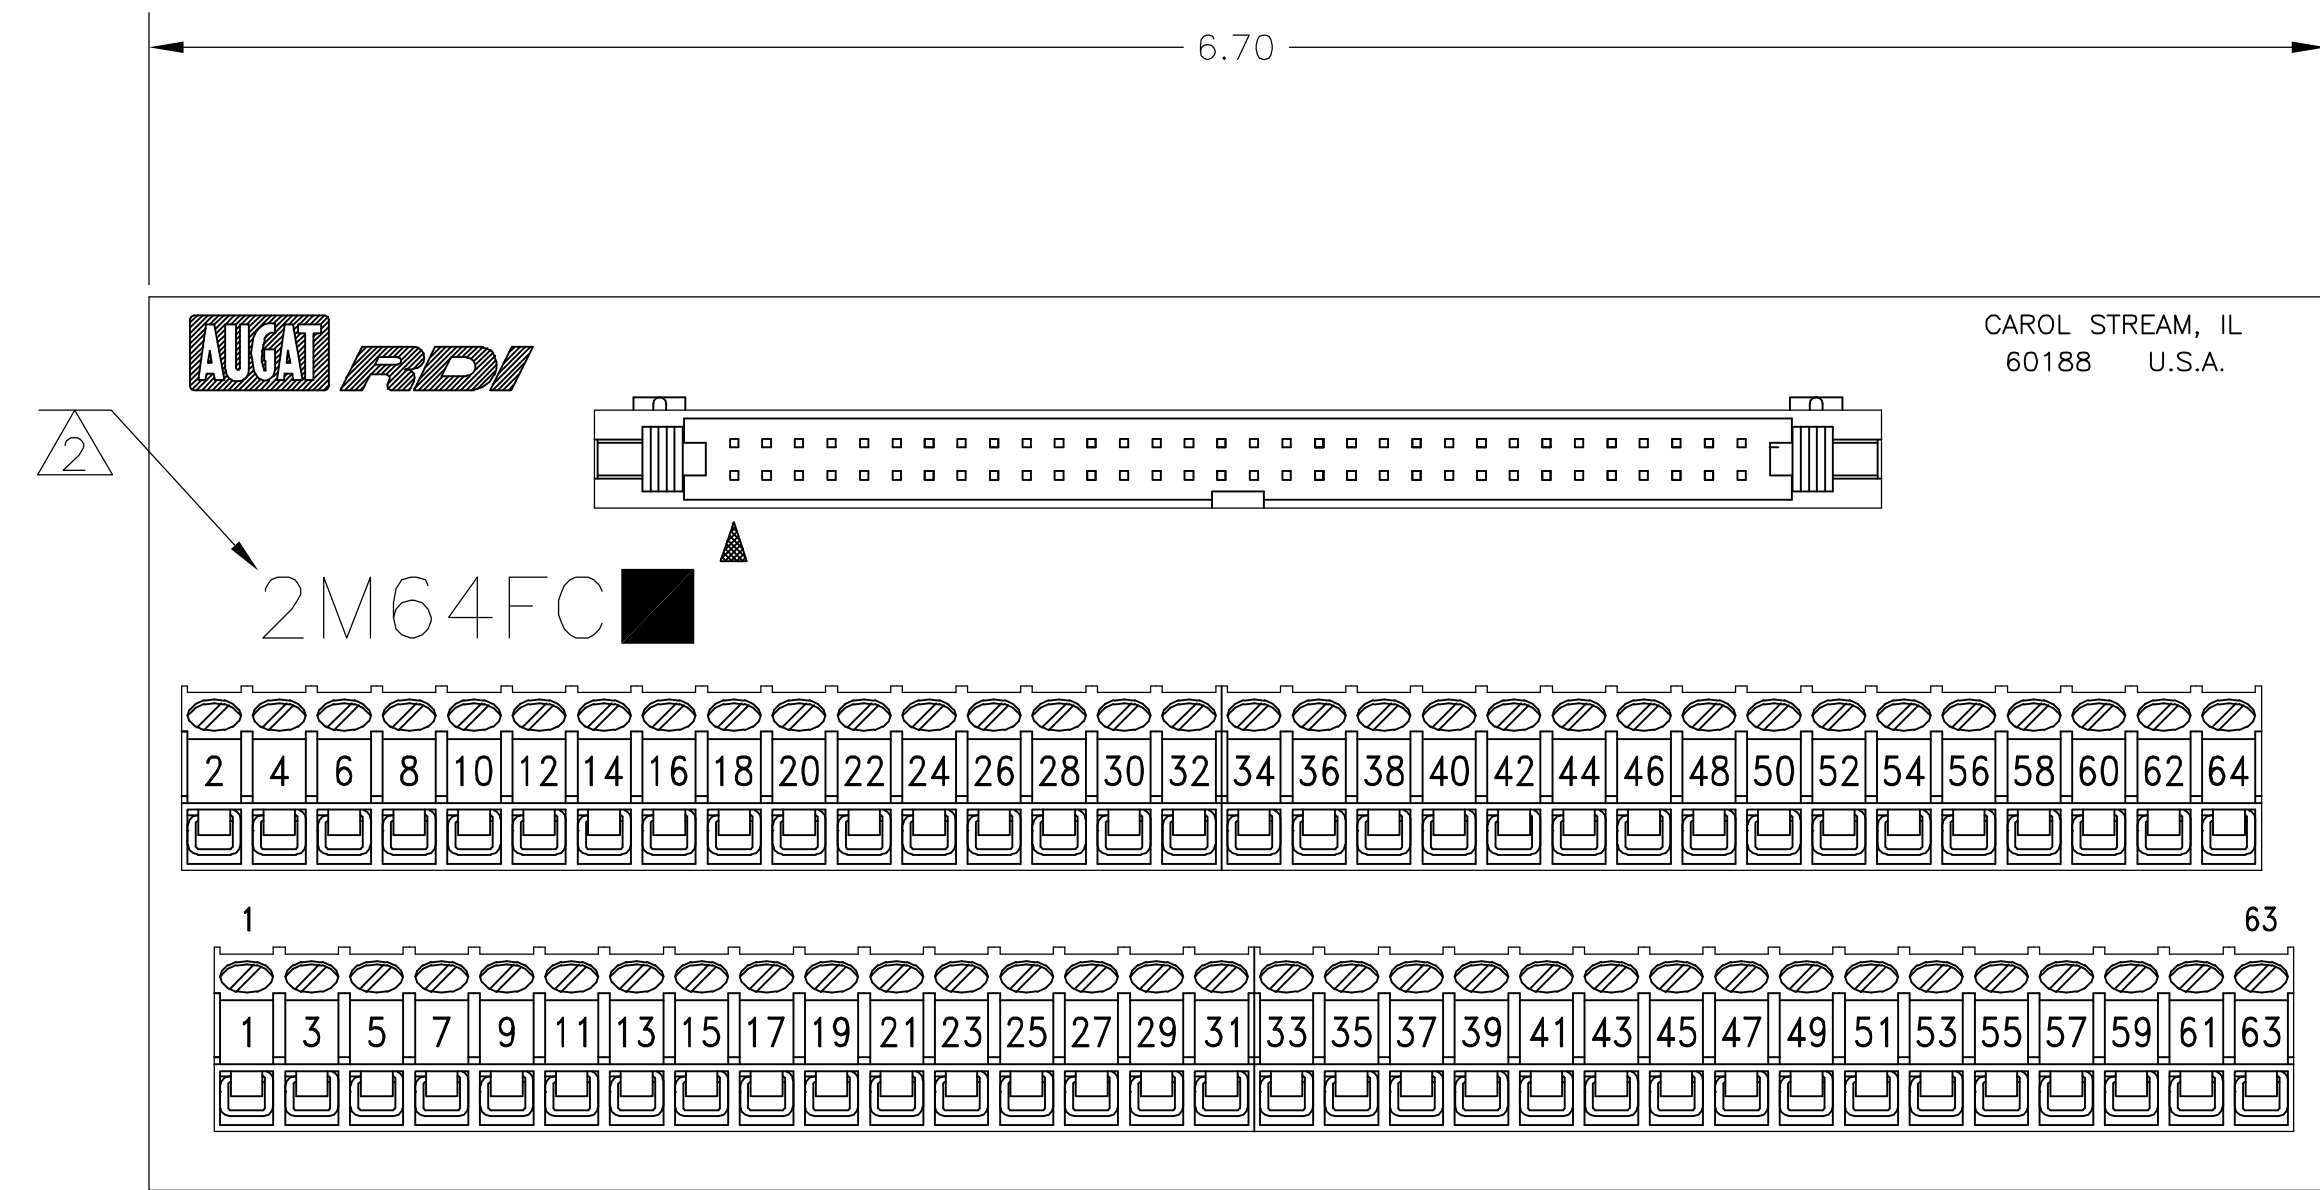

2M64FCL	1776647-1
2M64FC	3-1437684-6
CATALOG NO.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.S. FEHER 02APR2004	tyco Electronics	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK S. YODER 02APR2004		NAME 2M64FC ASSEMBLY	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. YODER 02APR2004	PRODUCT SPEC		
0 PLC ± .1		APPLICATION SPEC			
1 PLC ± .01		SIZE			
2 PLC ± .01		CAGE CODE			
3 PLC ± .01		DRAWING NO.			
4 PLC ± .01		RESTRICTED TO			
ANGLES ± .1		A1 00779			
FINISH		3-1437684-6			
MATERIAL		CUSTOMER DRAWING			
		SCALE NTS		SHEET 1 OF 1	
				REV A	