


## FEATURES

- Complies with IEC 61672-1 class 2 standard
- Measures Leq, MaxL, MinL, SPL
- 64,000 Records Data Logger
- USB interface
- With Windows Software
- AC / DC Signal Output
- Back-lit display

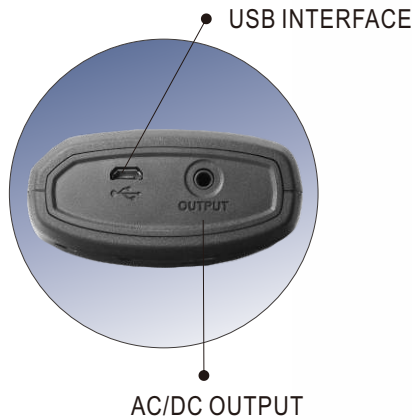

## SPECIFICATIONS

- Measurement Range:** 30 ~ 130dB  
**Accuracy:** ±1.4dB(ref 94 dB @ 1KHz)  
**Sampling Rate:** 2 times/sec  
**Frequency Weighting:** A/C  
**Time Weighting:** FAST, SLOW  
**Frequency Range:** 20 Hz ~ 8KHz  
**Microphone:**  
 1/2 inch Electret condenser microphone  
**Measuring time:** 10 s, 1, 5, 10, 15, 30 m, 1, 8, 24 h  
**Power Source:** 1.5V AA size battery x 4  
**Battery Life:** 30 hours(Alkaline)  
**Operating Condition:** 0°C to 40°C (<80%RH)  
**Storage Condition:** -10°C to 60°C (<70%RH)  
**Dimensions:** 272(L)X83(W)X42(H)mm  
**Weight:** Approx. 390g  
**Accessories:**  
 Battery, Manual, Windscreen, 3.5 ϕ plug, windows software, USB Cable, Carrying Case.



LED Back Light

\*The specifications and other information in this catalogue are subject to change without prior notice.

# CENTER®

## CENTER TECHNOLOGY CORP.



Certificate No. 49013377

4F, No.415, Jung-Jeng Road, Shu-Lin Dist.,  
 New Taipei City 238, Taiwan  
 TEL: 886-2-26763926 E-Mail: center@centertek.com  
 FAX: 886-2-26763925 http://www.centertek.com

Distributed by: