

SURFACE MOUNT SILICON DUAL, ISOLATED HIGH VOLTAGE SCHOTTKY DIODE



FEATURES:

- High Voltage (70V)
- Low Forward Voltage
- Galvanically Isolated



www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMLD6263 incorporates two galvanically isolated, high voltage, low V_F silicon diodes in a space saving SOT-563 surface mount package. These diodes are designed for fast switching applications requiring a low forward voltage drop.

MARKING CODE: 63D or 63

MAXIMUM RATINGS: (T _A =25°C)	SYMBOL		UNITS
Peak Repetitive Reverse Voltage	V _{RRM}	70	V
Continuous Forward Current	١ _F	15	mA
Peak Forward Surge Current, tp=1.0s	IFSM	50	mA
Power Dissipation	PD	250	mW
Operating and Storage Junction Temperature	т _Ј , Т _{stg}	-65 to +150	°C
Thermal Resistance	Θ_{JA}	500	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE: (T_A=25°C unless otherwise noted)

TEST CONDITIONS	MIN	TYP	MAX	UNITS
V _R =50V		10	200	nA
Ι _R =10μΑ	70			V
I _F =1.0mA		395	410	mV
V _R =0, f=1.0MHz			2.0	pF
I _R =I _F =10mA, I _{rr} =1.0mA, R _L =100Ω			5.0	ns
	V_R =50V I _R =10µA I _F =1.0mA V _R =0, f=1.0MHz	V_{R} =50V I _R =10µA 70 I _F =1.0mA V _R =0, f=1.0MHz	$V_{R}=50V 10 \\ I_{R}=10\mu A 70 \\ I_{F}=1.0mA 395 \\ V_{R}=0, f=1.0MHz$	$V_{R}=50V 10 200 \\ I_{R}=10\mu A 70 \\ I_{F}=1.0mA 395 410 \\ V_{R}=0, f=1.0MHz 2.0 \\ I_{R}=0, f=1.0MHz 2.0 \\ $

R7 (11-December 2015)





F

R2


1.70

1.70

1.30

SURFACE MOUNT SILICON DUAL, ISOLATED HIGH VOLTAGE SCHOTTKY DIODE

SOT-563 CASE - MECHANICAL OUTLINE

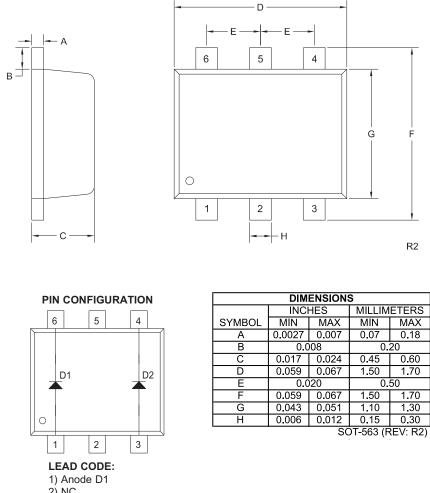

2) NC 3) Anode D2 4) Cathode D2 5) NC 6) Cathode D1

MARKING CODE: 63D or 63


R7 (11-December 2015)

www.centralsemi.com



SURFACE MOUNT SILICON DUAL, ISOLATED HIGH VOLTAGE SCHOTTKY DIODE



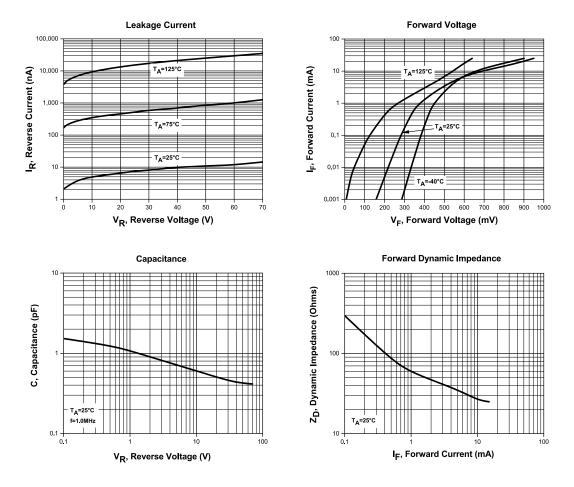

TYPICAL ELECTRICAL CHARACTERISTICS


www.centralsemi.com

R7 (11-December 2015)





SURFACE MOUNT SILICON DUAL, ISOLATED HIGH VOLTAGE SCHOTTKY DIODE

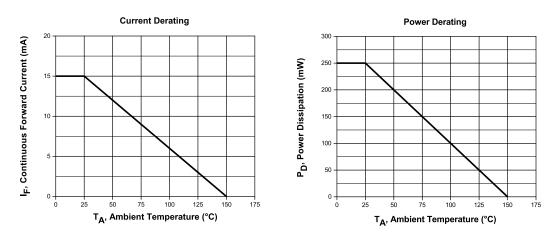

TYPICAL ELECTRICAL CHARACTERISTICS

www.centralsemi.com

R7 (11-December 2015)

www.centralsemi.com

OUTSTANDING SUPPORT AND SUPERIOR SERVICES

PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- · Consolidated shipping options

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities

Special wafer diffusions

· Custom product packing

- PbSn plating options
- Package details
- Application notes
- · Application and design sample kits

Custom bar coding for shipments

Custom product and package development

REQUESTING PRODUCT PLATING

- 1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
- If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA Main Tel: (631) 435-1110 Main Fax: (631) 435-1824 Support Team Fax: (631) 435-3388 www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

Worldwide Distributors: www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: <u>www.centralsemi.com/terms</u>





Product End of Life Notification

PDN ID:	PDN01063 Rev:001
Notification Date:	3/03/17
Last Buy Date:	N/A
Last Shipment Date	N/A

http://www.centralsemi.com

Please be advised that Central Semiconductor must immediately discontinue the product(s) listed in the attached PDN notice. We are unable to accept any further orders for these products **unless** we have available inventory on hand.

You may have purchased one or more of the products listed. Please do not hesitate to contact your local Central Semiconductor sales representative with any questions or needs you may have. Central regrets any inconvenience this may cause.

Sincerely,

Central Semiconductor Corp.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.



http://www.centralsemi.com

Product End of Life Notification

PDN ID:	PDN01063 Rev:001
Notification Date:	3/03/17
Last Buy Date:	N/A
Last Shipment Date	N/A

Summary:All devices manufactured in the SOT-563 package, using the Option 2 Lead Frame, are discontinued and now classified as End of Life (EOL). Rev001 issued to include BK devices previously excluded in error.

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by various manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's Product Management Process. Any replacement product will be noted below. The effective date for placing the last purchase order will be six(6) months from the date of this notice and twelve(12) months from the notice date for final shipments; this may be extended if inventory is available.

Central Part Number	Replacement
CMLD2004G BK	N/Ā
CMLD2004G TR	N/A
CMLD4448 BK	N/A
CMLD4448 TR	N/A
CMLD6001 BK	N/A
CMLD6001 TR	N/A
CMLD6263 BK	N/A
CMLD6263 TR	N/A
CMLD6263S BK	N/A
CMLD6263S TR	N/A
CMLSH-4 BK	N/A
CMLSH-4 TR	N/A
CMLZDA3V3 BK	N/A
CMLZDA3V3 TR	N/A
CMLZDA6V2 BK	N/A
CMLZDA6V2 TR	N/A

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centralsemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.