

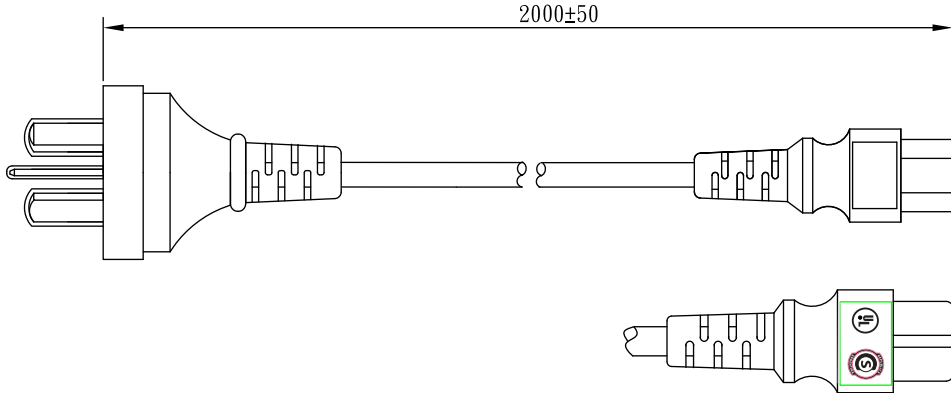


**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 26458, EM	09/20/16	BS
B	CHANGE ZIP BAG DIMENSIONS TO 250*110 mm, RFS, 26547, AT	11/11/16	BS
C	UPDATE PINCONFIGURATION ON END 'A', RFS, 26597, AT	12/20/16	BS

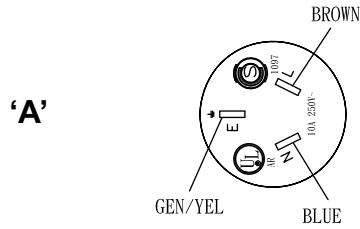

**GENERAL SPECIFICATIONS:**

- RATING: 2.5A / 250V
- CABLE TYPE / SIZE: H05VV-F 3 x 0.75 mm<sup>2</sup>
- TEMPERATURE RATING: 70° C
- CONDUCTOR COLORS: BLUE / BROWN/ GREEN-YELLOW
- CABLE JACKET COLOR: BLACK
- OVERALL LENGTH (L): 2000 ± 50 mm
- CABLE OUTER DIAMETER: 6.7 ± 0.2 mm
- END 'A' TERMINATION: ARGENTINA PLUG IRAM 2073
- END 'B' TERMINATION: IEC 320/C5
- APPROVALS PLUG: IRAM OR EQUIVALENT
- APPROVALS CABLE: IRAM OR EQUIVALENT
- APPROVALS CONNECTOR: IRAM OR EQUIVALENT

**PACKING:**  
 HANKING

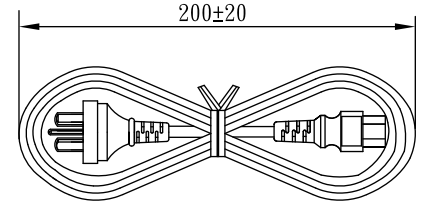

**NOTES:**

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

**RELEASED**  
 By N.Frost at 11:18 am, Dec 20, 2016




DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
		<b>TOLERANCES:</b> DECIMALS    ANGULAR .xx +/- 0.1    +/- 1° .xxx +/- .005		<b>GlobTek, Inc.</b> www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS    ANGULAR .xx +/- 0.3    +/- 1° .xxx +/- .013		
INIT.BY: EM	DATE: 09/20/16	<b>DWG TITLE: ARGENTINA TYPE DETACHABLE CORDSET</b>		
DRAWN: NF	DATE: 09/20/16	FSCN No.: G, CC	SIZE: A	REV. C
APRVD: MK	DATE: 09/20/16	SCALE: NONE	PART NO: <b>2194262M0712BC(R)</b>	SHEET 1/2

**Foot Note:**  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

**Limitation of Use:**  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice

**PACKING:**

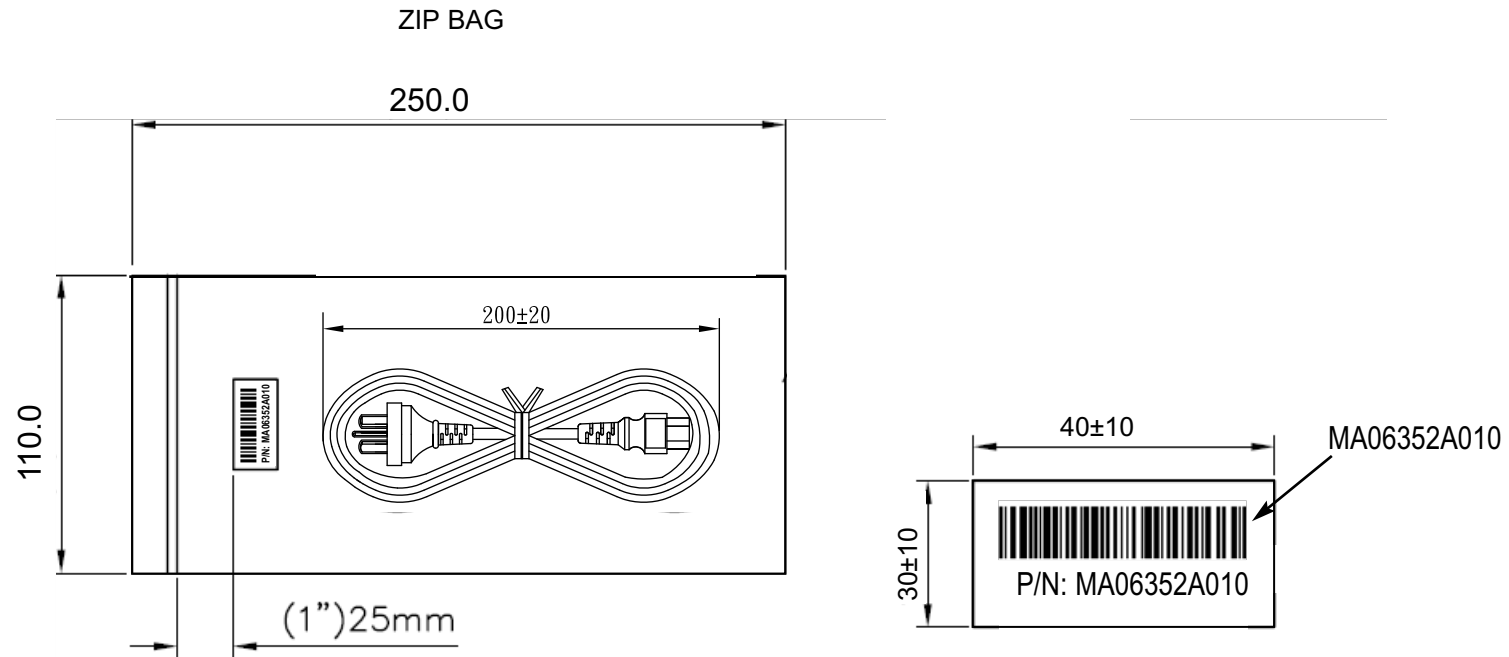

1. ZIP BAG: 250\*110 mm.
2. BARCODE LABEL SYMBOLOGY CODE 39.
3. PLACEMENT OF BARCODE LABEL: CENTERED 1" BELOW ZIPLOCK.

**GlobTek, Inc.**  
www.globtek.com

186 Veterans Dr. Northvale, NJ 07647  
Tel. 201-784-1000 Fax 201.784.0111

DWG TITLE: ARGENTINA TYPE DETACHABLE CORDSET

	REV. C
--	-----------

PART NO: 2194262M0712BC(R)	SHEET 2/2
----------------------------	-----------