

ITEM	PART#	DESCRIPTION	QTY	UOM
A	39012025	Mini Fit Jr 2CKT RECP. HSG 555702R210	1	PC
B	39000089	MiniFit Term Crp Fem Chn Bs 30Au 16awg	2	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

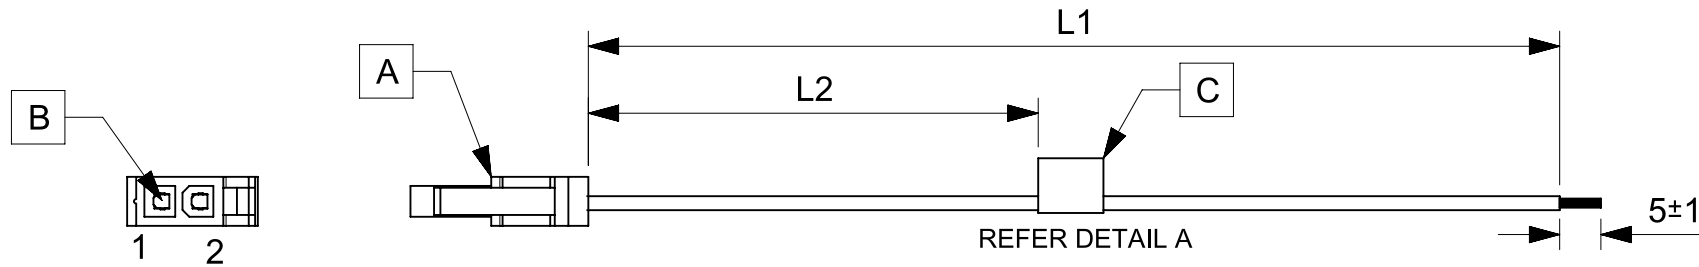


TABLE			
PART NUMBER	L1	L2	TITLE
2153262021	150±8	63 REF	MINIFIT JR DR R-S 2 CIRCUIT 150MM Au
2153262022	300±10	138 REF	MINIFIT JR DR R-S 2 CIRCUIT 300MM Au
2153262023	600±10	288 REF	MINIFIT JR DR R-S 2 CIRCUIT 600MM Au

**NOTES**

1. Connector view shown is from mating side.
2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/09	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{F}{A} = 0$ $\frac{F}{E} = 0$ $\frac{F}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		  SEE TABLE
	DIMENSION UNITS	SCALE	EC NO: 638379		
	mm	NTS	DRWN: ARAJU 2020/03/09		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: RDESAI01 2020/05/28		
ANGULAR TOL ± °		APPR: RDESAI01 2020/05/28		PRODUCT CUSTOMER DRAWING	
4 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	
3 PLACES ±		DRWN: ARAJU 2020/03/09		2153262021	
2 PLACES ±		APPR: RDESAI01 2020/05/28		DOC TYPE DOC PART REVISION	
1 PLACE ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PSD 000 A	
0 PLACES ±		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER
			A4-SIZE	215326	SEE TABLE
					CUSTOMER
					GENERAL MARKET
					SHEET NUMBER
					1 OF 1

RELEASE STATUS	P1	RELEASE DATE	2020/05/28	07:59:25
----------------	----	--------------	------------	----------