



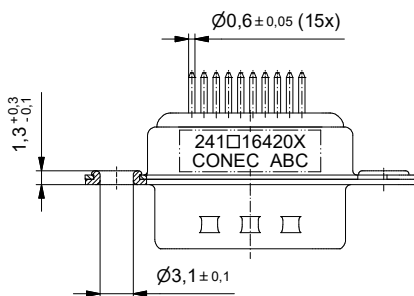


Sealing compound/
Verguss

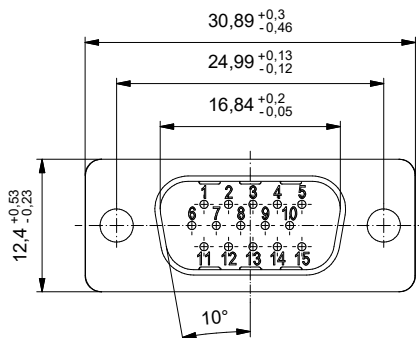

PCB hole drillings
(PCB top side)
Leiterplattenbohrbild
(Leiterplatten Oberseite)

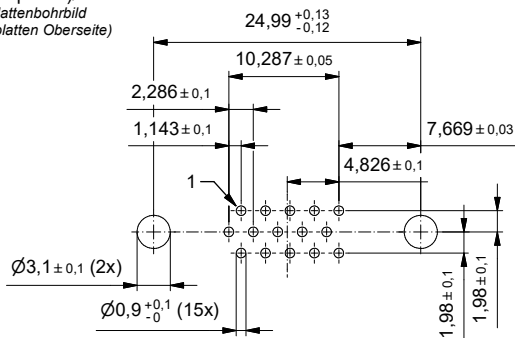

Technical specification/

Technische Daten:

Working voltage/ Betriebsspannung:	100 V DC
Current rating/ Strombelastbarkeit:	3 A (UL,VDE) / 2,5 A (CSA)
Insulation resistance/ Isolationswiderstand:	$\geq 1 \text{ G}\Omega$
Dielectric withstanding voltage/ Spannungsfestigkeit (DWV):	300 V DC
Temperature working range/ Umgebungstemperatur:	- 25 °C ... + 85 °C
Capacitance value/ Kapazitätswert:	830 pF \pm 20 %
Mating cycles/ Steckzyklen:	Quality class 1 = 500 Gütestufe 1 Quality class 2 = 200 Gütestufe 2 Quality class 3 = 50 Gütestufe 3

Materials/

Werkstoffe:

Contact/ Kontakt:	Cu alloy, Au over Ni Contact tails pretinned/ Kontaktspitzen verzinkt
Insulator/ Isolierkörper:	High temp. PA UL 94 V-0
Shell/ Gehäuse:	Steel, Sn over Ni
Sealing compound/ Verguss:	PUR

Installation specification/

Montagedaten:

Solder parameter/ Lötparameter:	
Solder preheat temperature/ Vorheiztemperatur:	100 °C for 30 sec./ 100 °C für 30 Sek.
Solder bath temperature/ Lötbadtemperatur:	260 °C for 5 sec./ 260 °C für 5 Sek.

Part no. / Part marked/ Art.-Nr. / Bedruckung:	Quality class/ Gütestufe:	Contact plating/ Kontakt Veredelung:
241A16420X	3	Gold flash over nickel Gold über Nickel
241B16420X	2	20 µm hard gold over min. 50 µm nickel 20 µm Gold über min. 50 µm Nickel
241C16420X	1	30 µm hard gold over min. 50 µm nickel 30 µm Gold über min. 50 µm Nickel

dim. in mm		D-SUB HD C-Filter Male 15pos.	
		D-SUB HD C-Filter Stiftleiste 15pol.	
Index: a Original	Scale/ Maßstab: 2:1	dwg no / Z.-nr.: 24K1A1939	DIN-A3
Status: Freigegeben			1 / 1
RoHS compliant/ konform			

drawn/ gez.	Date/ Datum	Name
appd./ gepr.	04.05.2020	Lehmenkühler
	04.05.2020	Schmidt



This reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. We reserve every right. It is allowed to make short excerpts for your own private use without further permission from Schmalz.