


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION


Rev.	Rev.Date	Modified By	Brief Description

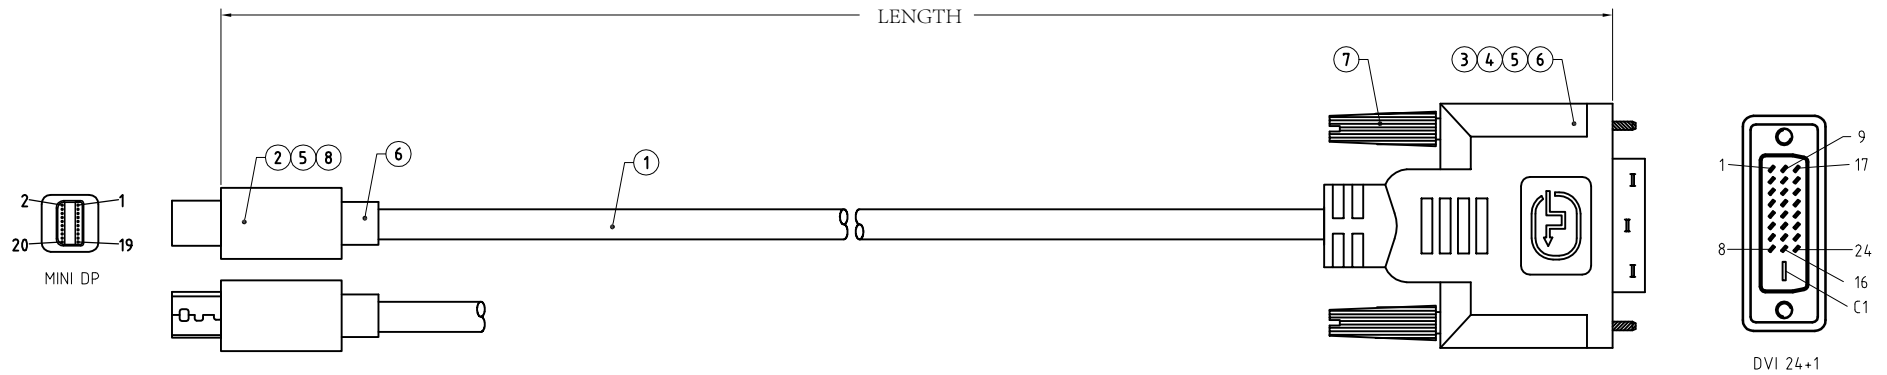

PIN ASSIGNMENT:


Mini DP	DVI(24+1)
1 地	Drain 11
3 红	Red 12
5 白	White 10
7 地	Drain 8
9 橙	Orange 9
11 白	White 7
13 地	Drain 5
15 黄	Yellow 6
17 白	White 4
8 地	Drain 2
10 蓝	Blue 3
12 白	White 1
16 绿	Green 15
18 白	White 17
14 地	Drain 16
19 白	White 19
2 橙	Orange 18
4 黄	Yellow 13
6 地	Drain 14
20 红	Red 20

Wire Details




- (32AWG×1P+Drain+Al+Mylar)/5
Conductor:Tinned Copper 7/0.08mm
Insulation:FM-PE+Skin
- 32AWG/5C
Conductor:Tinned Copper 7/0.08mm
Insulation:HD-PE
- Al.Mylar
- Drain:Bare Copper 7/0.08mm
- Braid: Al-Mg,85%
- Jacket: PVC; Color: White
Ø6.0mm

PCB:



Label:
Size:50 x 20 mm



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑧	Shell	Mini Display port 20 Pin Shell,ABS,White	1	SET
⑦	Thumbscrew	#4-40UNC,Ø2.8×L4.5mm,Nickel Plated,White PVC	2	PCS
⑥	Overmold	PVC,45Pa,White	N/A	G
⑤	Innermold	PE,Low density	N/A	G
④	PCBA	PTN3361BBS,Mini DP TO DVI	1	PCS
③	DVI_Conn	DVI(24+1)M,PIN G/F,Black Insulation,Steel-Shell(G/F Plated),Solder type	1	PCS
②	Mini DP_Conn	Mini DisplayPort Male,Pin G/F,Black Insulation,Steel-Shell(G/F Plated),Solder type	1	PCS
①	Cable	(32#TC×1P+D+M+A)×5+32#TC×5C+A+E+B(85%,Al-Mg)+PVC,White,OD:6.0mm	N/A	MM

DRAWN BY		DATE: 2014/09/03	DESCRIPTION: MINI DP M TO DVI-D(24+1) Cable,3FT	
CHECKED BY		SHEET 1 of 1	ITEM NO. MDPDVI-XXF-MM	
APPROVED BY	SCALE None	REV. 00	UNIT: mm	