



VIEWING DIRECTION: 12:00  
5.0 TFT  
800 (RGB) \*480

DETAIL A

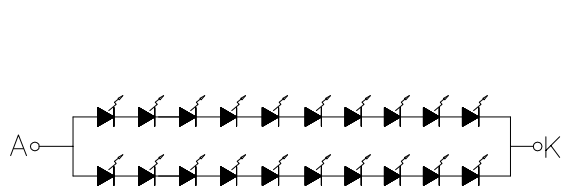

CIRCUIT DIAGRAM

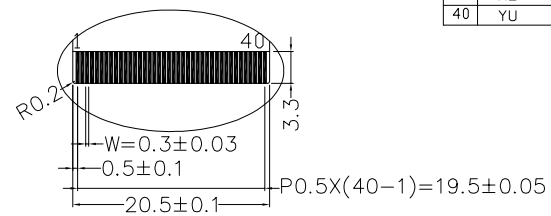

PIN ASSIGNMENT:

1	LED-K
2	LED-A
3	NC
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

NOTES:

1. DISPLAY TYPE: 5.0 TFT, TRANSMISSI
2. VIEWING DIRECTION : 12 O' CLO
3. Driver IC : ILI6122/ILI59
4. Top : -20° C ~ 70° C, Tst : -30° C ~ 80
5. GENERAL TOLERANCE:  $\pm 0.2$
6. RoHS Compliant

DLC Display Co., Limited www.dlcdisplay.com		
DRAWN BY:	TITLE: DLC0500HZG-8	
CHECKED BY:	DWG NO:	
APPROVED BY:	DWG NAME:	UNIT: mm
CONFIRMED BY:	SHEET NO: OF	

Outline Drawing



DLC Display Co., Limited

MODEL No: DLC0500HZG-8