1-2273108-4 - ACTIVE

TE Internal #: 1-2273108-4 M8 to M12 Cable Assembly, 3 Position, 1.5 m, Sensor/Actuator, Code A, M8 Plug, M12 Socket, Double Ended, Plastic View on TE.com >



Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies > M8 MS - M12 FS CABLE ASSY BL



M8/M12 Application Type: Sensor/Actuator

Number of Positions: 3

Connector & Keying Code: A

Connector Type (End A): M8 Plug

Connector Type (End B): M12 Socket

All M8 MS - M12 FS CABLE ASSY BL (19)

Features

Product Type Features

Connector Type (End A)

Connector Type (End B)

M8 Plug

M12 Socket

| Cable Assembly Type | M8 to M12 |
|------------------------------|--------------------|
| Configuration Features | |
| Number of Positions | 3 |
| Electrical Characteristics | |
| Operating Voltage | 60 VAC |
| Body Features | |
| Cable Color | Black |
| Connector Color (End B) | Black |
| Connector Color (End A) | Black |
| Jacket Material | PVC |
| Wire Color (Base) | Brown, Blue, Black |
| Connector & Keying Code | A |
| Contact Features | |
| Contact Current Rating (Max) | 4 A |
| Mechanical Attachment | |

C For support call+1 800 522 6752

1-2273108-4

M8 to M12 Cable Assembly, 3 Position, 1.5 m, Sensor/Actuator, Code A, M8 Plug, M12 Socket, Double Ended, Plastic



| Thread Size | M8 x M12 |
|--|--|
| Connector Orientation (End A) | Straight |
| Connector Orientation (End B) | Straight |
| Housing Features | |
| Housing Material | Plastic |
| Dimensions | |
| Outside Cable Diameter | 4.5 mm[.177 in] |
| Wire Size | .326 mm ² |
| Usage Conditions | |
| Operating Temperature Range | -30 – 80 °C[-22 – 176 °F] |
| Operation/Application | |
| M8/M12 Application Type | Sensor/Actuator |
| Shielded | No |
| Packaging Features | |
| Packaging Method | Box |
| Other | |
| Field Serviceable | Yes |
| Cable Assembly Length | 1.5 m |
| Cable Assembly Configuration | Double Ended |
| Product Compliance For compliance documentation, visit the product page on TE.com> | |
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |
| | |

| Field Serviceable | Yes |
|---|--|
| Cable Assembly Length | 1.5 m |
| Cable Assembly Configuration | Double Ended |
| Product Compliance For compliance documentation, visit the product page on TE.com> | |
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |

1-2273108-4

M8 to M12 Cable Assembly, 3 Position, 1.5 m, Sensor/Actuator, Code A, M8 Plug, M12 Socket, Double Ended, Plastic




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought

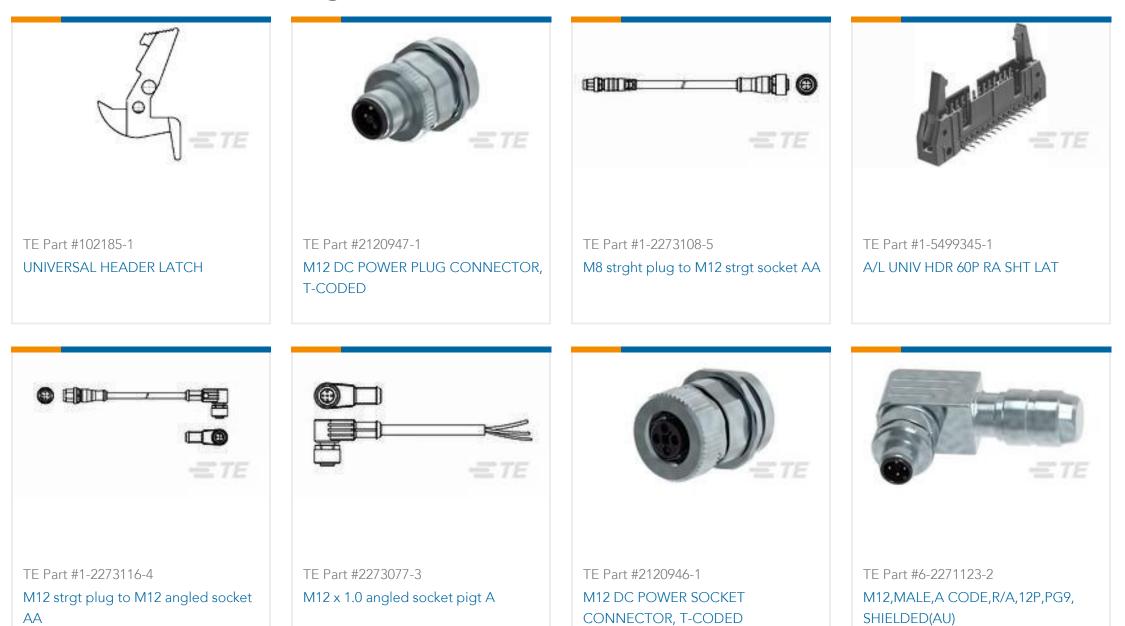

Documents

Product Drawings M8 strght plug to M12 strgt socket AA

English

1-2273108-4

M8 to M12 Cable Assembly, 3 Position, 1.5 m, Sensor/Actuator, Code A, M8 Plug, M12 Socket, Double Ended, Plastic



CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1-2273108-4_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2273108-4_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2273108-4_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages M8 / M12 Connector System Catalog English M8 / M12 Connector System Catalog Japanese

Product Specifications Product Specification

English