

MOSFET BASED DC SOLID-STATE RELAY

- ▶ Latest MOSFET technology generation.
- ▶ Ultra low on-state resistance.
- ▶ Low output leakage current.
- ▶ Low control current consumption.
- ▶ Built-in overvoltage protection
- ▶ Reverse protected triggered control input to avoid linear control risks
- ▶ No radiated or conducted disturbances
- ▶ Touch protected housing IP20



SOM020100



Control voltage range	3.5-32VDC
Max. permanent output voltage	60VDC
Max. load current with heatsink	20ADC

Load voltage range	Load current range	Control input voltage range	In & case / Out Insulation	Connexions	Dimensions (WxHxD)	Weight
5-60VDC	Up to 20A (with heatsink)	3.5-32VDC	2.5kV	Screw terminals	45 x 58.5 x 30	80g

Fig. 1


HIGH SIDE WIRING DIAGRAM
(Load connected to “-”)

Fig. 2



LOW SIDE WIRING DIAGRAM
(Load connected to “+”)

Fig. 3

INTERNAL DIAGRAM

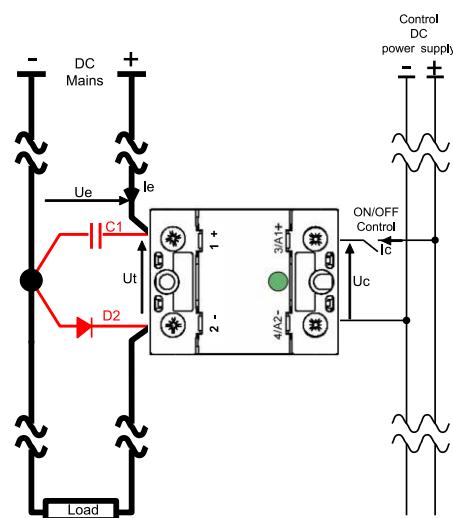

Proud to serve you

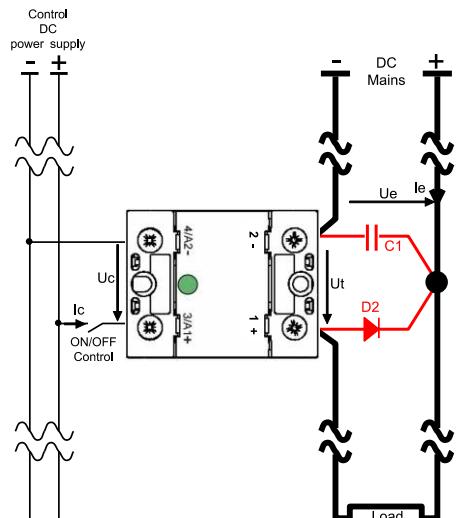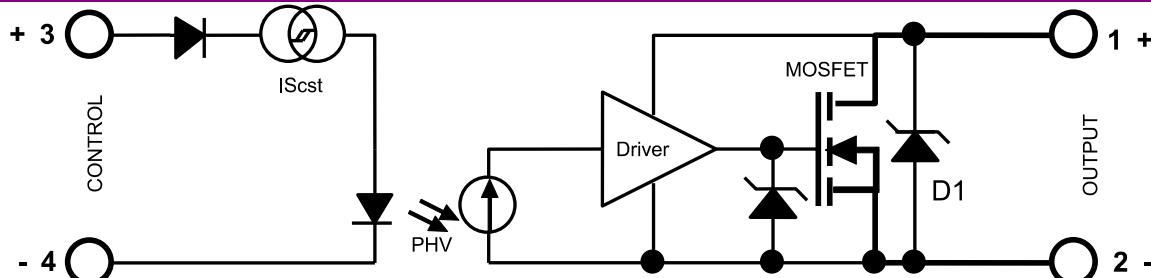CONTROL INPUT CHARACTERISTICS

INPUT CIRCUIT	CHARACTERISTIC	LABEL	VALUE	INFO.
	Nom. Control voltage	Ucnom	12-24VDC	
	Min. Control current	Icmin	35mA DC	-100µA/°C
	Control voltage range	Uc	3.5 - 32VDC	typical ON=3.3V
	Control current consumption	Ic	32 - 35mA DC (for control voltage range)	See fig. 5
	Releasing control voltage	Ucoffmax	1VDC	typical OFF= 2.6V
	Max. reverse control voltage	-Ucmax	32VDC	-Icmax<100µA
	Input impedance	Rin	Current limitation	See fig. 5

POWER OUTPUT CHARACTERISTICS

POWER CIRCUIT	CHARACTERISTIC	LABEL	VALUE	INFO.
	Nominal voltage	Uenom	48VDC	
	Voltage range	Ut Ue	5-60VDC	
	Non-repetitive peak voltage	Utp	100V	
	Ovovoltage protection	D1	Transient voltage suppressor 56V (1500W/1ms)	
	Max reverse voltage drop (internal diode at OFF state)	-Ut	1.3V	@Ie=50A @Uc=0
	Maximum nominal currents	Ie max	Resistive Motor 20A Please contact us	See fig. 7 (limits)
	Non-repetitive peak overload current	Id max	200A	See fig. 8
	Min. load current	Iemin	5mA	
	Max. leakage current	Ielk max	3mA	@Utmax @Tjmax
	Max. on-state resistance	RDSon	56mΩ	@Iemax @Tjmax
	Typ. output capacitance	Cout	0.3nF	
	Junction/case thermal resistance per power element	Rthje	1.4K/W	
	Built-in heatsink thermal resistance vertically mounted	Rthra	10K/W	@ΔTra=75°C
	Heatsink thermal time constant	Tthra	10 minutes	@ΔTra=55°C
	Control inputs/power outputs insulation voltage	Uimp	2.5kV	
	Inputs/case insulation voltage	Uimp	2.5kV	
	Outputs/case insulation voltage	Uimp	2.5kV	
	Isolation resistance	Rio	1GΩ	
	Isolation capacitance	Cio	<8pF	
	Maximum junction temperature	Tjmax	175°C	
	Storage ambient temperature	Tstg	-40>+100°C	
	Operating ambient temperature	Tamb	-25>+90°C	See fig. 7
	Max. case temperature	Tc	100°C	


PROTECTION CHARACTERISTICS

PROTECTION	Leakage current (Ielk) vs DC voltage (Ut)	Absolute limits
	<p>Ielk / Ie</p> <p>Leakage current (Ielk) vs DC voltage (Ut)</p> <p>Y-axis: Ielk / Ie</p> <p>X-axis: Ut (V)</p> <p>Key points: Utmax (=Uemax) at Ielk / Ie = 1</p>	<p>Uto < Utp</p> $t_{\text{max}} = \frac{0.75}{(U_{\text{to}} - U_{\text{t max}}) \times I_e}$ $P_{(\text{protection})} = 1W_{\text{max}}$ $\Rightarrow \frac{(U_{\text{to}} - U_{\text{t max}}) \times I_e \times t}{T} \leq 1$
	<p>Ielk : Leakage current of the relay</p> <p>Ie : User load nominal current</p> <p>Utp : Relay max. non repetitive peak voltage</p>	<p>Umax : Max. nominal voltage of the relay</p> <p>Uto : Possible overvoltage above Utmax</p> <p>Utn = Ue : User DC power supply voltage</p> <p>t : Overvoltage duration</p> <p>T: Time between 2 overvoltage</p>

TIME CHARACTERISTICS

Fig. 4

TIME DIAGRAMS

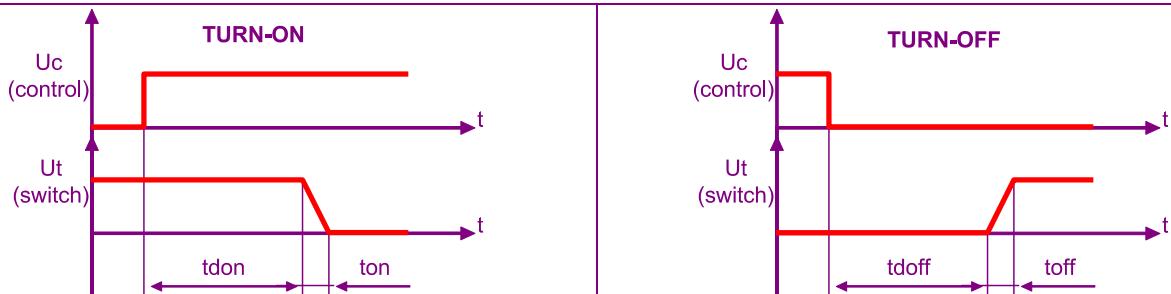

TIME CHARACT.	CHARACTERISTIC	LABEL	VALUE	INFO.
	Turn on time	ton	20µs	
	Turn on delay	tdon	20µs	
	Turn off time	toff	20µs	
	Turn off delay	tdoff	20µs	
	Max. On-Off frequency	F(on-off)	>1000Hz (for high frequency, take 2 x Ie to calculate the heatsink; the protections must be chosen carefully)	Refer to the instruction sheet

GENERAL INFORMATION

CONNECT IONS	Connections	Power	Control	
	Screwdriver advised		POZIDRIV2	
	Min and max tightening torque	2 N.m	1.2 N.m	
	Insulated crimp terminals (round tabs, eyelet type)	M5	M4	

MISC.	Display	Green LED (indicates relay has switched ON)	
	Housing	UL94V0	
	Mounting	2 screws (M4x12mm ; tightening = 1.2N.m)	See mounting sheet
	Noise level	None	
	Weight	80g	

STANDARDS

GENERAL	Standards		IEC60947-1	
	Protection level		IP20	
	Protection against direct touch		Yes	
	CE marking		Yes	
	UL, cULUS		Yes	

E.M.C. IMMUNITY	TYPE OF TEST	STANDARD	LEVEL	EFFECT
	Fast transients bursts	EN61000-4-4	4kV criterion B	
	Electric shocks	EN61000-4-5	1kV criterion B	
	Voltage drop	EN61000-4-11	-	

CHARACTERISTIC CURVES

Fig. 5

INPUT CHARACTERISTIC

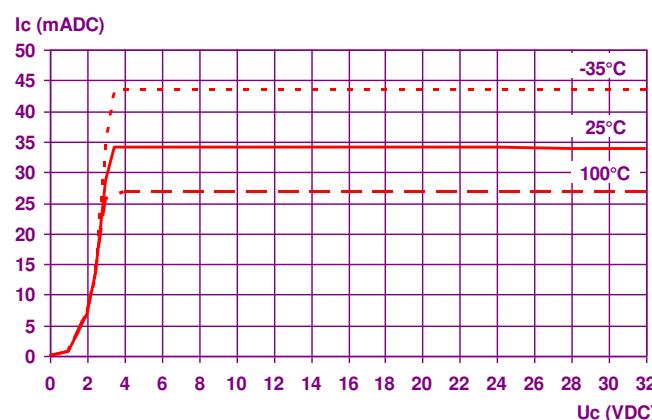


Fig. 6

ON RESISTANCE VS JUNCTION TEMPERATURE


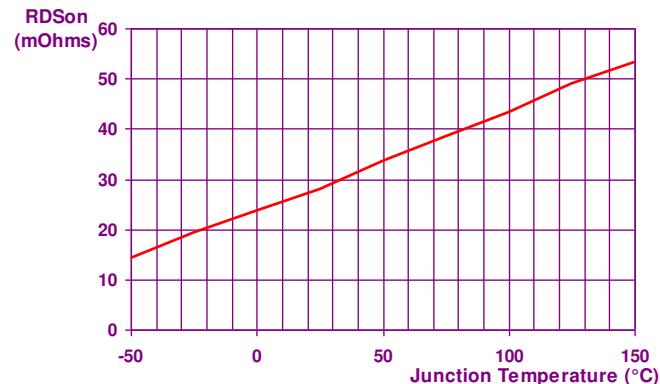


Fig. 7

POWER DISSIPATED AND LOAD CURRENT LIMIT VS TEMPERATURE

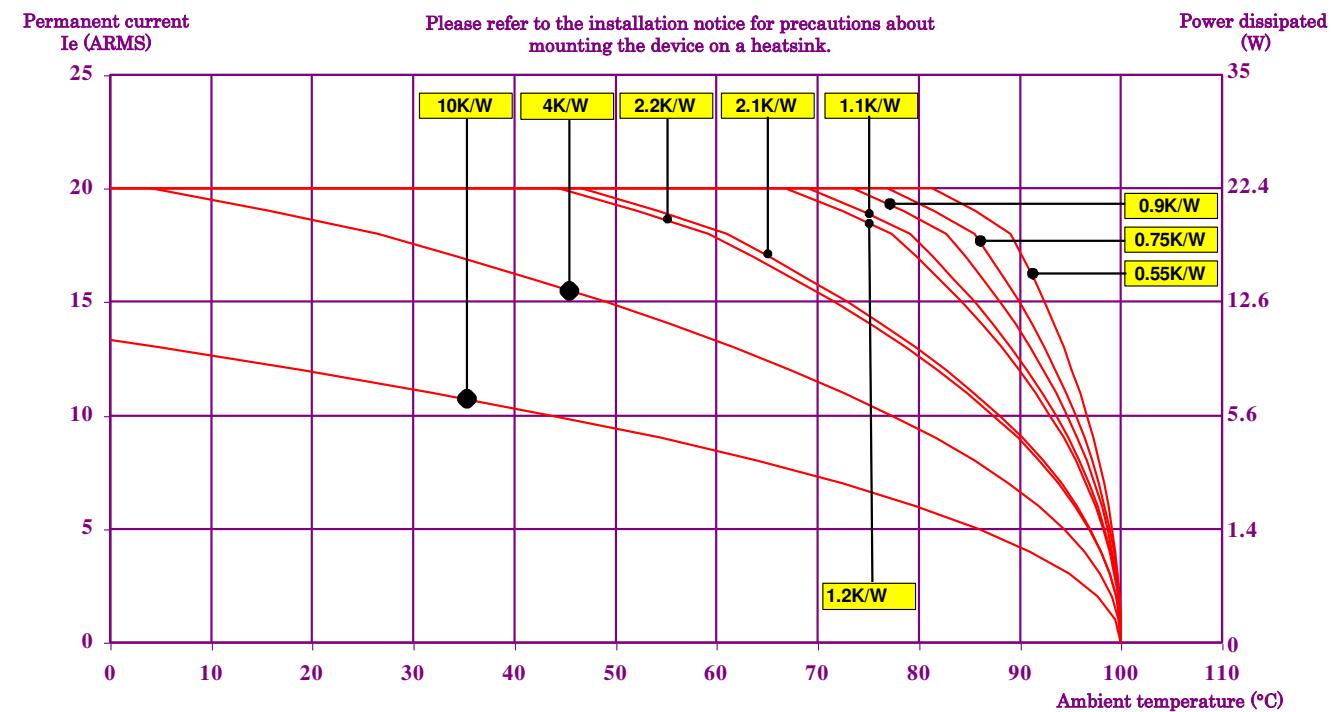

10K/W = No Heatsink
2.1K/W = WF210000
0.75K/W = WF070000



4K/W = 150x150x3mm aluminium sheet
1.2K/W = WF121000
0.55K/W = WF050000

2.2K/W = WF262100
1.1K/W = WF131100

2.2K/W = WF151200
0.9K/W = WF115100

Fig. 8





PEAK OVERLOAD CURRENT vs. PULSE DURATION CHARACTERISTIC

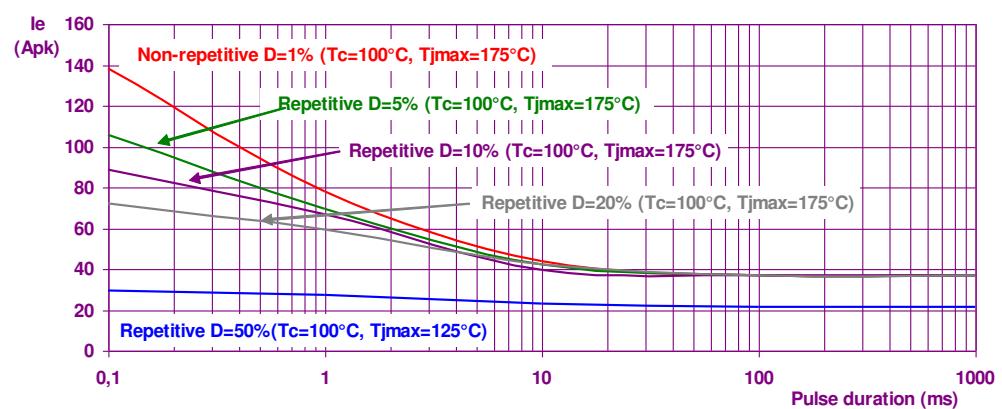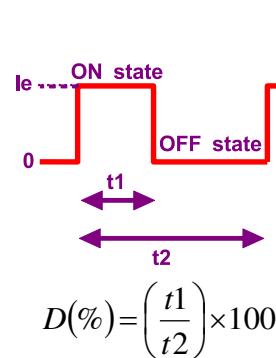

DIMENSIONS AND ACCESSORIES

Fig. 9

DIMENSIONS (mm)

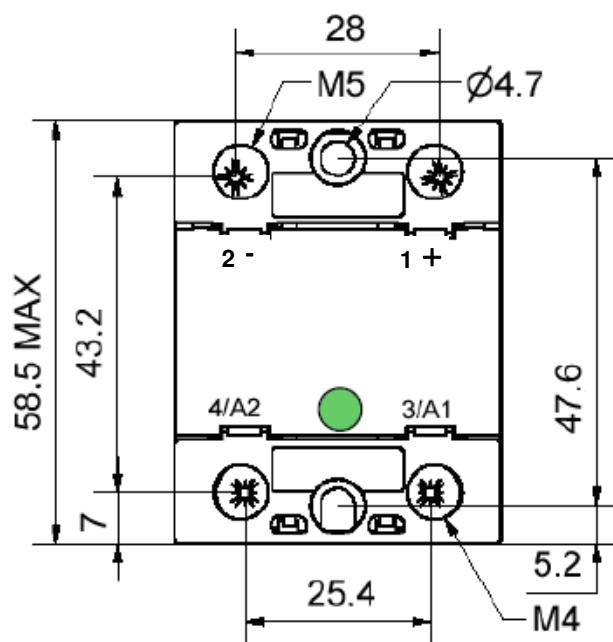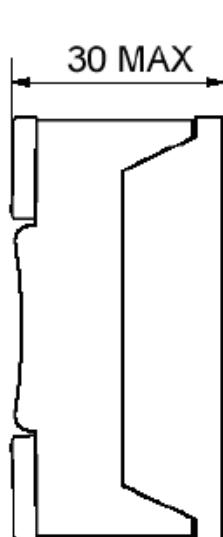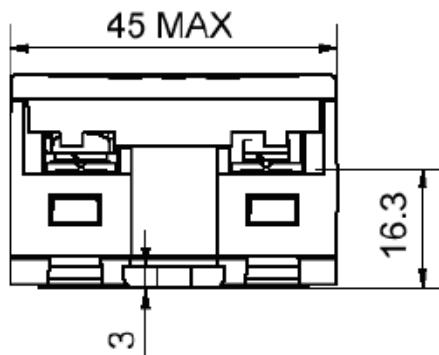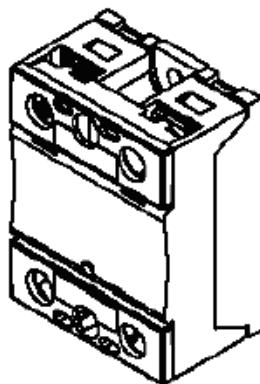Fig.
10

ACCESSORIES

FASTON : Please contact us

