
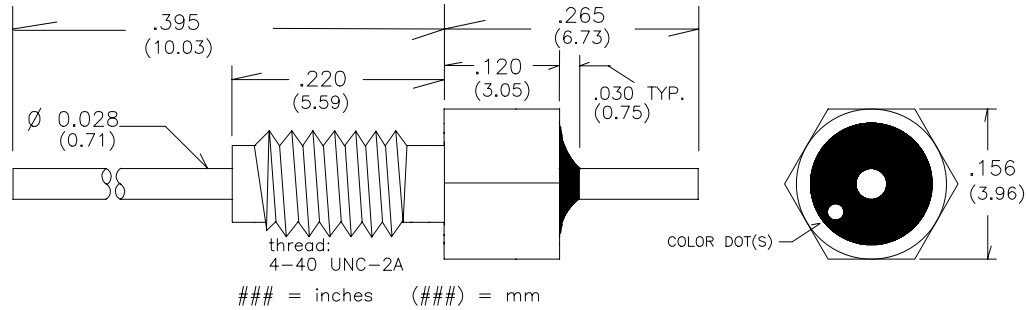


NOTE:
ATTENUATION EFFECTIVENESS
OF INDUCTOR IS LOST IF
CURRENT THROUGH FILTER
IS GREATER THAN 250 mA

B4L273B
Industry Standard 4-40
27,000pF Cap. "L" Feed-Thru

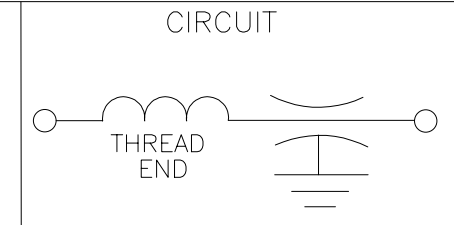

- * RoHS Compliant
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B4L273B		27,000	2 RED	100	10	13	35	53	75	65

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
DISSIPATION FACTOR: 3.5% MAX.
INSULATION RESISTANCE:
25° C=10,000 Mohm Min.
125° C=1,000 Mohm Min.
DIELECTRIC STRENGTH (DWV):
250% of WVDC (5 seconds)
TEMPERATURE CHARACTERISTIC:
X7R or better

PHYSICAL

DIMENSION TOLERANCE:
CASE LENGTH: +/- .010" (.250mm)
LEAD LENGTH: +/- .030" (.762mm)
LEAD DIAMETER: +/- .002" (.051mm)
MATERIAL AND FINISH:
CASE: C12L14 CRS
LEAD: Copper (1/2 Hard)
FINISH: Silver per QQ-S-365

IDENTIFICATION & LIMITS

MARKING: Color Dot standard per chart
OPERATING TEMP: -55° C to +125° C
INSTALLATION TEMP: N/A
MAXIMUM MOUNTING TORQUE: 2.0 in*lbs

VENDOR: EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com		FILTERS, EMI, "L" CIRCUIT, STANDARD 4-40 THREADED BODY		
FSCM NO.	DWG NO. B4L273B REVD	REV D		