

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F


F

G




G

H

H

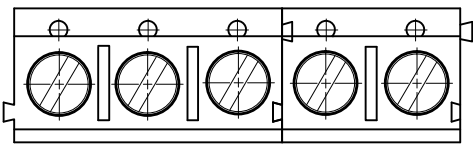

N=NUMBER OF CONTACTS

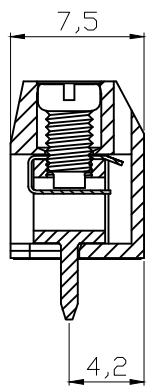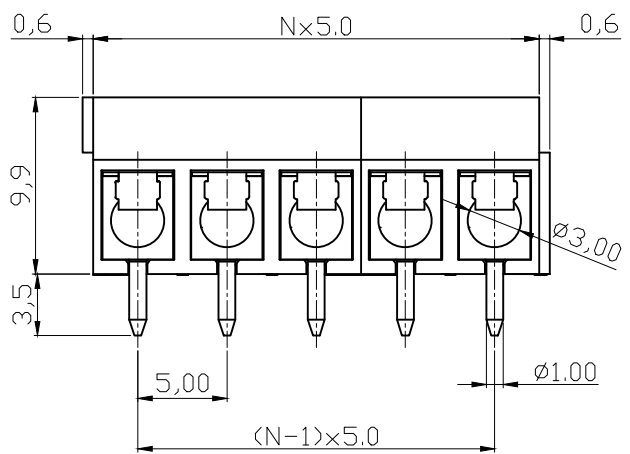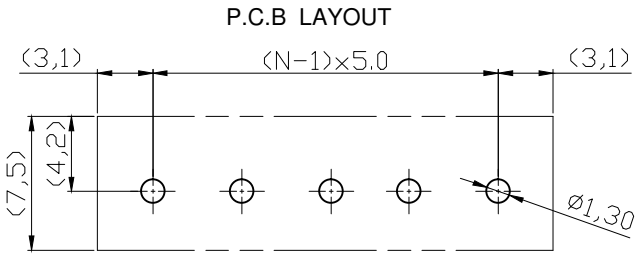

Material


- Terminal body (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Wire guard: Stainless steel
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0),Blue

Electrical cULus/CSA/VDE

- Voltage rating: 300VAC/250VAC/250VAC
- Current rating: 15A/16A/17.5A
- Wire range: 0.75-1.5mm²
- Solid wire(AWG): 14-22/14-22
- Stranded wire(AWG): 14-22/14-22
- Torque: 2.6Lb-In/4Kgf.cm/0.4Nm
- Screw: M2.6
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV/1.5KV/2KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- SAFETY APPROVAL :

RoHS compliant

Unit: mm



Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	29.07.2009	Dean	
X.	±0.50					Approved	18.04.2016	Joanna	ASSMANN WSW-No.
X.X	±0.30								A-TB500-TCxx
X.XX	±0.10								Drawing-No.
DIM	TOL	②	Add UL	18.04.2016	Joanna			ASS 3591 CO	
X.°	±1°								
X.X°	±X°	①	Drawn	29.07.2009	Dean			Sheet	
Angle	TOL	Id.	Modification	Date	Name				

1

2

3

4

5

6

7