


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		T		EC 0G3C 0734 04	18DEC04	BSV	-
		T1		REVISED PER ECO-09-020932	25AUG09	KK	AEG

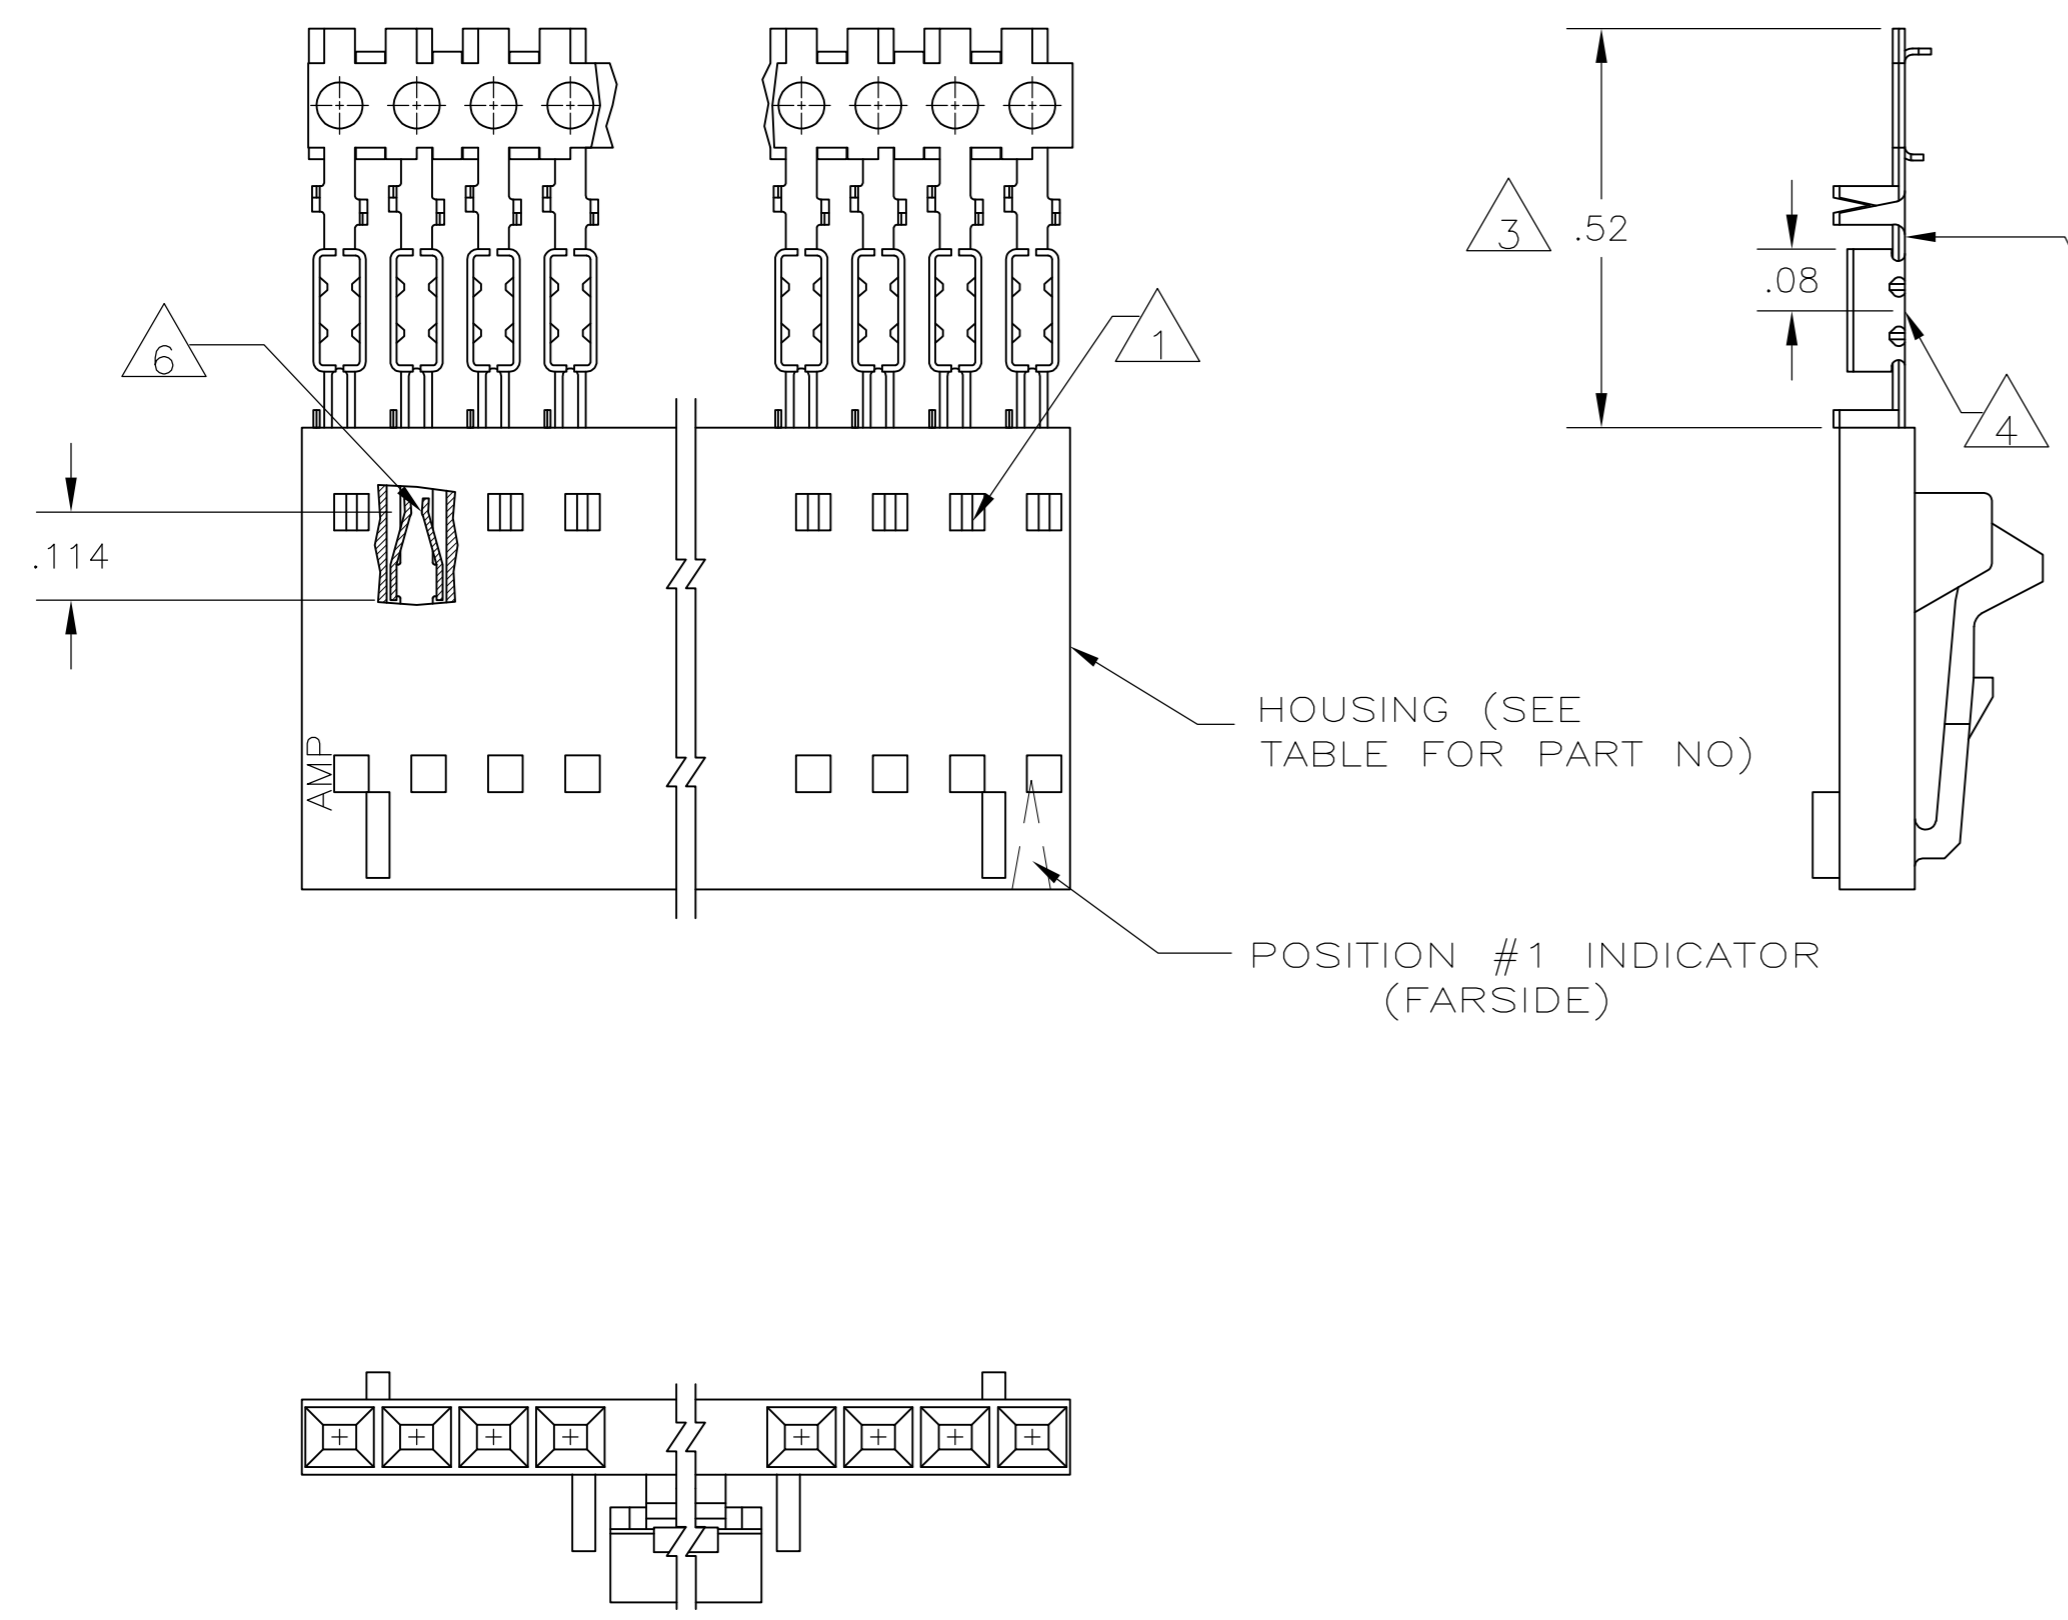

CONTACT IDENTIFICATION LETTER "A" (LOCATED IN THIS AREA)

PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER
8	2-104257-4	25	7-103641-4
8	2-104257-3	24	7-103641-3
8	2-104257-2	23	7-103641-2
8	2-104257-1	22	7-103641-1
8	2-104257-0	21	7-103641-0
8	1-104257-9	20	6-103641-9
8	1-104257-8	19	6-103641-8
8	1-104257-7	18	6-103641-7
8	1-104257-6	17	6-103641-6
8	1-104257-5	16	6-103641-5
8	1-104257-4	15	6-103641-4
8	1-104257-3	14	6-103641-3
8	1-104257-2	13	6-103641-2
9	2-104257-4	25	2-103641-4
9	2-104257-3	24	2-103641-3
9	2-104257-2	23	2-103641-2
9	2-104257-1	22	2-103641-1
9	2-104257-0	21	2-103641-0
9	1-104257-9	20	1-103641-9
9	1-104257-8	19	1-103641-8
9	1-104257-7	18	1-103641-7
9	1-104257-6	17	1-103641-6
9	1-104257-5	16	1-103641-5
9	1-104257-4	15	1-103641-4
9	1-104257-3	14	1-103641-3
9	1-104257-2	13	1-103641-2
9	1-104257-1	12	1-103641-1
9	1-104257-0	11	1-103641-0
9	104257-9	10	103641-9
9	104257-8	9	103641-8
9	104257-7	8	103641-7
9	104257-6	7	103641-6
9	104257-5	6	103641-5
9	104257-4	5	103641-4
9	104257-3	4	103641-3
9	104257-2	3	103641-2
9	104257-1	2	103641-1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103959
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 CONTACTS: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL
- 8 CONTACTS: .000100-.000200 MATTE TIN OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

SUPERSEDED BY 1-103959-1
 SUPERSEDED BY 1-103959-0
 SUPERSEDED BY 103959-9
 SUPERSEDED BY 103959-8
 SUPERSEDED BY 103959-7
 SUPERSEDED BY 103959-6
 SUPERSEDED BY 103959-5
 SUPERSEDED BY 103959-4
 SUPERSEDED BY 103959-3
 SUPERSEDED BY 103959-2
 SUPERSEDED BY 103959-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	.02
3 PLC	±	.005
4 PLC	±	-
ANGLES	±	-

FINISH: SEE TABLE

MATERIAL: HOUSING- FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK
 CONTACTS- PHOS BRONZE

DWN: L A MAYER 11-4-86
 CHK: P de JONG 11-12-86
 APVD: P de JONG 11-12-86

PRODUCT SPEC: 108-25034
 APPLICATION SPEC: 114-25026

WEIGHT: -

CUSTOMER DRAWING

Tyco Electronics Corporation
 Harrisburg, Pa 17105-3608

NAME: RCPT ASSY, AMPMODU MTE, SINGLE, LATCHED & POLARIZED, FOR #26-#30 AWG WIRE SIZE

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 103641 RESTRICTED TO: -

SCALE: 4:1 SHEET: 1 OF 1 REV: T1