


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

**NOTES:**

1. DIAMETER DIMENSION, SHOWN FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS ( ) ARE ENGLISH.
3. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

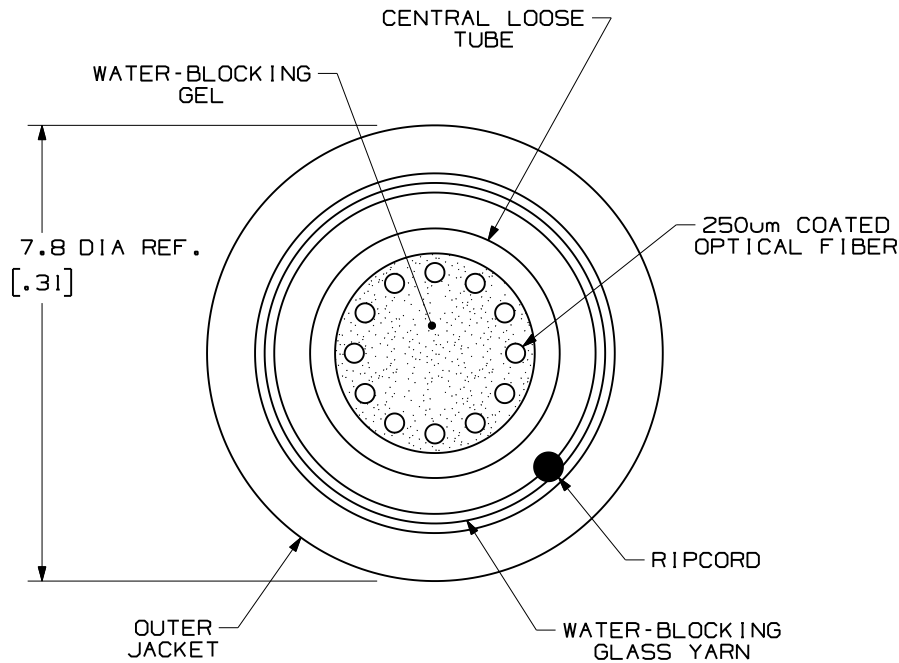

PART NUMBER	FIBER TYPE	JACKET RATING	JACKET COLOR
FLCR912Y	SINGLEMODE 9/125um	RISER	BLACK
FLCL912Y		LSZH	
FLCR612Y	MULTIMODE 62.5/125um	RISER	
FLCL612Y		LSZH	
FLCR512Y	MULTIMODE 50/125um	RISER	
FLCL512Y		LSZH	
FLCRX12Y	MULTIMODE 50/125um OM3	RISER	
FLCLX12Y		LSZH	
FLCRV12Y	MULTIMODE 50/125um OM3 150 METER LONG REACH	RISER	
FLCLV12Y		LSZH	
FLCRZ12Y	MULTIMODE 50/125um OM4	RISER	
FLCLZ12Y		LSZH	

TECHNICAL SPECIFICATIONS			
MAXIMUM LOSS - MULTIMODE		MAXIMUM LOSS - SINGLEMODE	
3.5 dB/KM @ 850nm 1.5 dB/KM @ 1300nm		.75 dB/KM @ 1310nm .75 dB/KM @ 1550nm	
BEND RADIUS		TENSILE LOAD	
INSTALLATION	LONG TERM	INSTALLATION	LONG TERM
230mm [9.0 in]	115mm [4.5 in]	1340 N [304 lbf]	400 N [90 lbf]
TEMPERATURE			
INSTALLATION/OPERATION		STORAGE	
-20° C TO +60° C -4° F TO +140° F		-40° C TO +65° C -40° F TO +149° F	

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
01	10-29-09	EFK		RELEASED TO PRODUCTION	02055-155				

OPTI-CORE 12 FIBER INDOOR-OUTDOOR CABLE  
CUSTOMER DRAWING

PANDUIT™  
CORP.  
TINLEY PARK, ILL 60477

DRAWING FILENAME: M02055CZ\_DC\_12/00B  
SCALE: NONE  
PART NO.: FLCR\*12Y  
FLCL\*12Y  
DRAWING NO.: 02055-155  
SIZE: A

ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.  
DIMENSIONAL TOLERANCES ARE:  
(.X) (.XXX) ± 0.3 (.010)  
(.XX) ± 0.8 (.03) ANGLES

THIRD ANGLE PROJECTION

DRAWN BY: EFK  
DATE: 03-07-07  
CHK'D: WMA

REVIEW DRAWING NUMBERS