

## Data Sheet

**Customer:**

**Product:** Metal Film Leaded Precision Resistor—MFR Series

**Sizes.:** 0318/0623/0932/1145/1550

**Issued Date:** 24-Jul-23

**Edition:** REV.B7



VIKING TECH CORPORATION  
光頡科技股份有限公司  
No.70, Guangfu N. Rd., Hukou  
Township, Hsinchu County  
303, Taiwan (R.O.C)

TEL:886-3-5972931  
FAX:886-3-5972935•886-3-5973494  
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH  
光頡科技股份有限公司高雄分公司  
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,  
806, Taiwan

TEL:886-7-8217999  
FAX:886-7-8228229  
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.  
光頡電子(無錫)有限公司  
No.22 Xixia Road, Machinery & Industry Park,  
National Hi-Tech Industrial Development Zone  
of Wuxi, Wuxi, Jiangsu Province, China  
Zip Code:214028  
TEL:86-510-85203339  
FAX:86-510-85203667•86-510-85203977  
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
24-Jul-23	24-Jul-23	24-Jul-23	24-Jul-23	
<i>Kris Chen</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		

## Metal Film Leaded Precision Resistor


### ■ Features

- Excellent overall stability
- Very tight tolerance down to  $\pm 0.1\%$
- Extremely low TCR down to  $\pm 10$  PPM/ $^{\circ}\text{C}$
- High power rating up to 3 Watts
- Excellent ohmic contact

### ■ Applications

- Telecommunication
- Medical Equipment

### ■ Construction

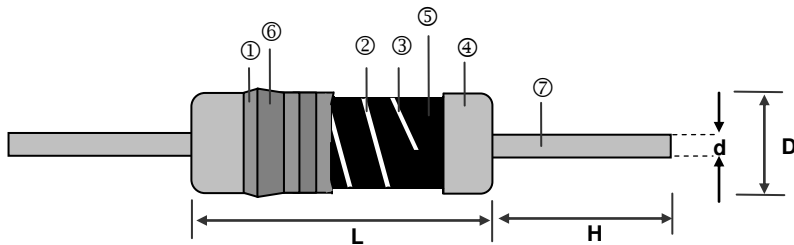


① Insulation Coating	⑤ Resistor Layer
② Trimming Line	⑥ Marking
③ Ceramic Core	⑦ Lead Wire
④ Electrode Cap	

### ■ Dimensions


Unit: mm

Type	L	D	H	d	Weight (g) (1000pcs)
MFR0318 (1/8W)	3.3+0.4/-0.2	1.8±0.3	29±3.0	0.45±0.03	90
MFR0318 (1/4W 2/5W)	3.3+0.7/-0.2	1.8±0.3	29±3.0	0.45±0.03	90
MFR0623	6.3±0.5	2.3±0.3	28±3.0	0.55±0.03	150
MFR0932	9.0±0.5	3.2±0.5	26±3.0	0.65±0.03	350
MFR1145	11.5±1.0	4.5±0.5	35±3.0	0.78±0.03	770
MFR1550	15.5±1.0	5.0±0.5	32±3.0	0.78±0.03	1040

### ■ Derating Curve

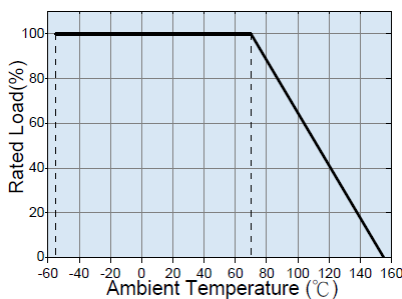

### ■ Hot-Spot Temperature

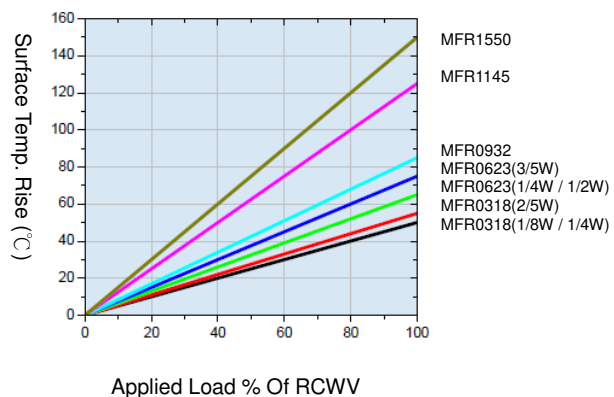

**Part Numbering**

MFR	0318	B	T	C	W	1001	
Product Type	Dimensions (LxD)	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Power Rating	Resistance	Special
	0318: 3.3x1.8 0623: 6.3x2.3 0932: 9.0x3.2 1145: 11.5x4.5 1550: 15.5x5.0	B: ±0.1% C: ±0.25% D: ±0.5% F: ±1%	A: Ammo B: Bulk T: Taping Reel	B: ±10 N: ±15 C: ±25 D: ±50 E: ±100	R: 3W S: 2W T: 1W F: 3/5W U: 1/2W G: 2/5W V: 1/4W W: 1/8W	R100: 0.1Ω 0010: 1Ω 1000: 100Ω 2201: 2200Ω 1001: 1KΩ 1004: 1MΩ	: Standard MA: MA-type MB: MB-type MC: MC-type FA: FA-type FB: FB-type FC: FC-type FD: FD-type

**Standard Electrical Specifications**

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Dielectric Withstanding Voltage	Resistance Range				TCR (PPM/°C)
						±0.1%	±0.25%	±0.5%	±1%	
0318	1/8W	-55 ~ +155°C	150V	300V	300V	10Ω-1MΩ				±25
						10Ω-1MΩ		10Ω-4.99MΩ	10Ω-10MΩ	±50
						-	10Ω-1MΩ	10Ω-4.99MΩ	0.1Ω-10MΩ	±100
0623	1/4W	-55 ~ +155°C	250V	500V	500V	100Ω-22KΩ				±10
						10Ω-499KΩ				±15
						10Ω-1MΩ				±25
						10Ω-1MΩ		10Ω-4.99MΩ	10Ω-10MΩ	±50
						-	10Ω-1MΩ	10Ω-4.99MΩ	0.1Ω-10MΩ	±100
0932	1/2W	-55 ~ +155°C	350V	500V	500V	10Ω-1MΩ				±25
						10Ω-1MΩ		10Ω-4.99MΩ	10Ω-10MΩ	±50
						-	10Ω-1MΩ	10Ω-4.99MΩ	0.1Ω-10MΩ	±100
1145	1W	-55 ~ +155°C	500V	700V	700V	10Ω-1MΩ				±25
						10Ω-1MΩ		10Ω-4.99MΩ	10Ω-10MΩ	±50
						-	10Ω-1MΩ	10Ω-4.99MΩ	0.1Ω-10MΩ	±100
1550	2W	-55 ~ +155°C	500V	1000V	1000V	10Ω-1MΩ				±25
						10Ω-1MΩ		10Ω-4.99MΩ	10Ω-10MΩ	±50
						-	10Ω-1MΩ	10Ω-4.99MΩ	0.1Ω-10MΩ	±100

Operating Voltage= $\sqrt{P \cdot R}$  or Max. operating voltage listed above, whichever is lower.  
 Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$  or Max. overload voltage listed above, whichever is lower.  
 Value Range for standard resistance : below or over this resistance on request.

**High Power & Ultra High Power Rating Electrical Specifications**

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Dielectric Withstanding Voltage	Resistance Range				TCR (PPM/°C)			
						±0.1%	±0.25%	±0.5%	±1%				
0318	1/4W	-55 ~ +155°C	200V	400V	300V	10Ω-1MΩ				±25			
						10Ω-1MΩ		10Ω-4.99MΩ	10Ω-10MΩ	±50			
						-	10Ω-1MΩ	10Ω-4.99MΩ	0.1Ω-10MΩ	±100			
	2/5W		10Ω-1MΩ				±25						
			10Ω-1MΩ		10Ω-4.99MΩ	10Ω-10MΩ	±50						
			-	10Ω-1MΩ	10Ω-4.99MΩ	0.1Ω-10MΩ	±100						
0623	1/2W	-55 ~ +155°C	300V	500V	500V	100Ω-22KΩ				±10			
						10Ω-499KΩ				±15			
						10Ω-1MΩ				±25			
			10Ω-1MΩ		10Ω-4.99MΩ	10Ω-10MΩ	±50						
			-	10Ω-1MΩ	10Ω-4.99MΩ	0.1Ω-10MΩ	±100						
			3/5W	350V	500V	500V	100Ω-22KΩ				±10		
	10Ω-499KΩ						±15						
	10Ω-1MΩ						±25						
	10Ω-1MΩ			10Ω-4.99MΩ	10Ω-10MΩ	±50							
	-	10Ω-1MΩ		10Ω-4.99MΩ	0.1Ω-10MΩ	±100							
	0932	1W		-55 ~ +155°C	400V	600V	500V	10Ω-1MΩ				±25	
			10Ω-1MΩ					10Ω-4.99MΩ	10Ω-10MΩ	±50			
-			10Ω-1MΩ					10Ω-4.99MΩ	0.1Ω-10MΩ	±100			
1145			2W		-55 ~ +155°C	500V	700V	700V	10Ω-1MΩ				±25
									10Ω-1MΩ		10Ω-4.99MΩ	10Ω-10MΩ	±50
									-	10Ω-1MΩ	10Ω-4.99MΩ	0.1Ω-10MΩ	±100
1550	3W	-55 ~ +155°C	500V	1000V	1000V	10Ω-1MΩ				±25			
						10Ω-1MΩ		10Ω-4.99MΩ	10Ω-10MΩ	±50			
						-	10Ω-1MΩ	10Ω-4.99MΩ	0.1Ω-10MΩ	±100			

Operating Voltage= $\sqrt{P \cdot R}$  or Max. operating voltage listed above, whichever is lower.  
 Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$  or Max. overload voltage listed above, whichever is lower.  
 Value Range for standard resistance · below or over this resistance on request.

**Environmental Characteristics**

Item	Requirement	Test Method
Short Time Overload	±(0.25%+0.05Ω)	<b>IEC-60115-1 4.13</b> 2.5 times RCWV for 5 seconds
Insulation Resistance	> 10000MΩ	<b>IEC-60115-1 4.6</b> In V-Block
Endurance	±(1.5%+0.05Ω)	<b>IEC-60115-1 4.25</b> 70°C, RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	±(1.5%+0.05Ω)	<b>IEC-60115-1 4.24</b> 40±2°C, 90~95% R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Solderability	95% min. Coverage	<b>IEC-60115-1 4.17</b> 260±5°C for 2±0.5 seconds
Voltage Proof	By Type	<b>IEC-60115-1 4.7</b> In V-Block for 60 seconds
Temperature Coefficient	By Type	<b>IEC-60115-1 4.8</b> Resistance value at room temperature(+25°C) and room Temperature(+125°C)
Pulse Overload	±(0.75%+0.05Ω)	<b>IEC-60115-1 4.39</b> 4 times RCWV for 10000 cycles with 1sec "ON" and 25 sec "OFF"
Resistance To Solvent	No deterioration of coatings and markings	<b>IEC-60115-1 4.30</b> IPA for 5±0.5 min. with ultrasonic
Terminal Strength	Tensile: ≥ 2.5kg	<b>IEC-60115-1 4.16</b> Direct Load for 10 sec. In the direction off the terminal leads
Resistance to Soldering Heat	0318: ±(0.75%+0.05Ω) 0623&0932: ±(0.5%+0.05Ω) 1145&1550: ±(0.25%+0.05Ω)	<b>IEC-60115-1 4.18</b> The solder iron heated to 260°C±5°C and applied to the termination for a duration of 10±1 seconds
Temperature Cycling	±(0.75%+0.05Ω)	<b>IEC-60115-1 4.19</b> -55°C/125°C with 5 cycles. (30min for both low and high temperature, transfer time less 30s)


RCWV(Rated continuous working voltage)=  $\sqrt{P \cdot R}$  or Max. Operating voltage whichever is lower

**Storage Temperature: 25±3°C; Humidity < 80%RH**


**Taping/Packing Specifications**

**1. Standard Type (Reel & Ammo)**

Packing Methods

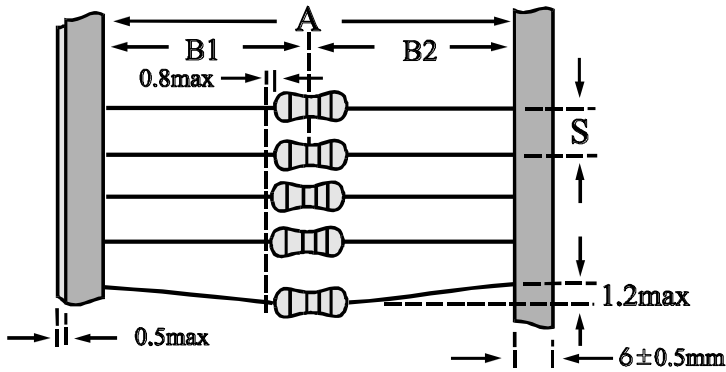


Reel Packing

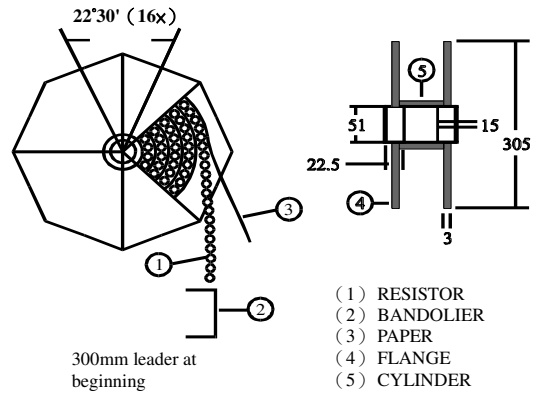

Unit: mm

Packaging Type	Packing Methods			Reel Packing	
	A	B1-B2 Max	S	Across Flange (A)	Qty
0318	52+1/-0	1.2	5±0.3	72	5,000
	26+0.5/-0	1.0			
0623	52+1/-0	1.2	5±0.3	72	5,000
	26+0.5/-0	1.0			
0932	52+1/-0	1.2	5±0.3	72	2,500
1145	73+1/-0	1.5	5±0.3	95	2,000
	52+1/-0				
1550	73+1/-0	1.5	10±0.8	95	1,000
	52+1/-0				


Ammo Packing

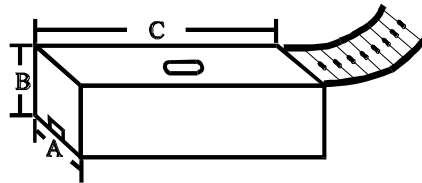


Unit: mm

Packaging Type	Packing Methods			Ammo Packing			
	A	B1-B2 Max	S	A	B	C	Qty
0318	52+1/-0	1.2	5±0.3	79±2	73±3	257±5	5,000
	26+0.5/-0	1.0		52±2	74±3	252±5	
0623	52+1/-0	1.2	5±0.3	79±2	100±3	257±5	5,000
	26+0.5/-0	1.0		52±2	109±3	252±5	
0932	52+1/-0	1.2	5±0.3	79±2	58±3	257±5	1,000
1145	73+1/-0	1.5	5±0.3	103±2	82±3	262±5	1,000
	52+1/-0			81±2	85±3	256±5	
1550	73+1/-0	1.5	10±0.8	103±2	96±3	265±5	1,000
	52+1/-0			82±2	108±3	258±5	


**2. Special Type (Bulk)**

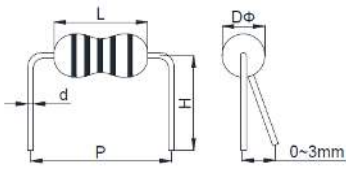


**MA Type**

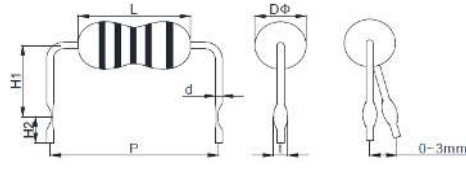


**MB Type**

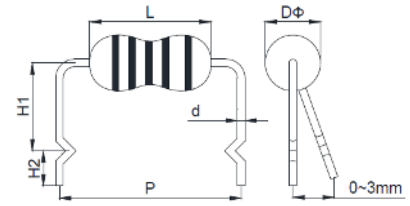


**MC Type**

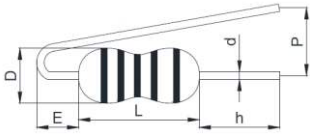


**FA Type**

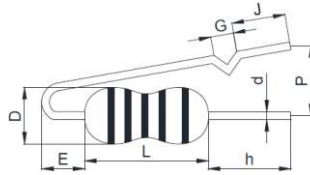

**FB Type**

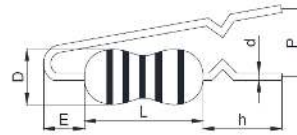

**FC Type**

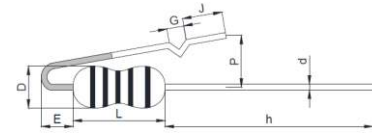


**FD Type**

Unit: mm

Codes	Type	P	H / H1/h	H2/G	J	t	D	L	d	E
0623	MA	10±1	10.0±1	-	-	-	2.3±0.3	6.3±0.5	0.55±0.03	-
	MC	10±1	6.0±1	5.0±2	-	-	2.3±0.3	6.3±0.5	0.55±0.03	-
	FA	5~15	5.0±2	-	-	-	2.3±0.3	6.3±0.5	0.55±0.03	3±1
	FB	5~15	4.0±2	3.0±1	3±2	-	2.3±0.3	6.3±0.5	0.55±0.03	3±1
	FD	5~15	27.0±2	3.0±1	12±2	-	2.3±0.3	6.3±0.5	0.55±0.03	3±1
0932	MA	12.5±1	10.0±1	-	-	-	3.2±0.5	9.0±0.5	0.65±0.03	-
	MC	12.5±1	5.0±1	4.0±2	-	-	3.2±0.5	9.0±0.5	0.65±0.03	-
	FA	5~15	5.0±2	-	-	-	3.2±0.5	9.0±0.5	0.65±0.03	3±1
	FB	5~15	4.0±2	3.0±1	3±2	-	3.2±0.5	9.0±0.5	0.65±0.03	3±1
	FC	5~15	10.0±3	-	-	-	3.2±0.5	9.0±0.5	0.65±0.03	-
1145	MA	15±1	12.5±1	-	-	-	4.5±0.5	11.5±1.0	0.78±0.03	-
	MC	15±1	8.0±1	6.0±1	-	-	4.5±0.5	11.5±1.0	0.78±0.03	-
	FA	5~15	5.0±2	-	-	-	4.5±0.5	11.5±1.0	0.78±0.03	3±1
	FB	5~15	4.0±2	3.0±1	3±2	-	4.5±0.5	11.5±1.0	0.78±0.03	3±1
	FC	5~15	10.0±3	-	-	-	4.5±0.5	11.5±1.0	0.78±0.03	-
1550	MA	20±1	15.0±1	-	-	-	5.0±0.5	15.5±1.0	0.78±0.03	-
	MC	20±1	12.0±1	5.0±1	-	-	5.0±0.5	15.5±1.0	0.78±0.03	-
	FA	5~15	5.0±2	-	-	-	5.0±0.5	15.5±1.0	0.78±0.03	3±1
	FB	5~15	4.0±2	3.0±1	3±2	-	5.0±0.5	15.5±1.0	0.78±0.03	3±1
	FC	5~15	10.0±3	-	-	-	5.0±0.5	15.5±1.0	0.78±0.03	-

**Metal Film Leaded Precision Resistor**

**■ Marking & Resistance Tolerance**

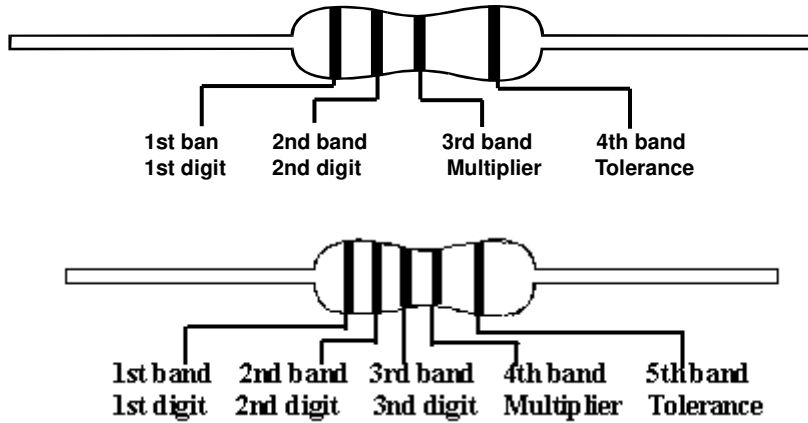

Cold	Digit	Multiplier	Tolerance	
Without	-	-	±20%	M
Silver	-	10 <sup>-2</sup>	±10%	K
Gold	-	10 <sup>-1</sup>	±5.0%	J
Black	0	10 <sup>0</sup>	-	-
Brown	1	10 <sup>1</sup>	±1.0%	F
Red	2	10 <sup>2</sup>	±2.0%	G
Orange	3	10 <sup>3</sup>	-	-
Yellow	4	10 <sup>4</sup>	-	-
Green	5	10 <sup>5</sup>	±0.50%	D
Blue	6	10 <sup>6</sup>	±0.25%	C
Violet	7	10 <sup>7</sup>	±0.10%	B
Grey	8	10 <sup>8</sup>	±0.05%	A
White	9	10 <sup>9</sup>	-	-

±1.00%	E-24	1.0	1.1	1.2	1.3	1.5	1.6	1.8	2.0	2.2	2.4	2.7	3.0	3.3	3.6	3.9	4.3	4.7	5.1	5.6	6.2	6.8	7.5	8.2	9.1
±0.50%		E-96	1.00	1.02	1.05	1.07	1.10	1.13	1.15	1.18	1.21	1.24	1.27	1.30	1.33	1.37	1.40	1.43	1.47	1.50	1.54	1.58	1.62	1.65	1.69
±0.25%	1.78		1.82	1.87	1.91	1.96	2.00	2.05	2.10	2.15	2.21	2.26	2.32	2.37	2.43	2.49	2.55	2.61	2.67	2.74	2.80	2.87	2.94	3.01	3.09
	3.16		3.24	3.32	3.40	3.48	3.57	3.65	3.74	3.83	3.92	4.02	4.12	4.22	4.32	4.42	4.53	4.64	4.75	4.87	4.99	5.11	5.23	5.36	5.49
	5.62		5.76	5.90	6.04	6.19	6.34	6.49	6.65	6.81	6.98	7.15	7.32	7.50	7.68	7.87	8.06	8.25	8.45	8.66	8.87	9.09	9.31	9.53	9.76
±0.10%	E-192	10.0	10.1	10.2	10.4	10.5	10.6	10.7	10.9	11.0	11.1	11.3	11.4	11.5	11.7	11.8	12.0	12.1	12.3	12.4	12.6	12.7	12.9	13.0	13.2
		13.3	13.5	13.7	13.8	14.0	14.2	14.3	14.5	14.7	14.9	15.0	15.2	15.4	15.6	15.8	16.0	16.2	16.4	16.5	16.7	16.9	17.2	17.4	17.6
		17.8	18.0	18.2	18.4	18.7	18.9	19.1	19.3	19.6	19.8	20.0	20.3	20.5	20.8	21.0	21.3	21.5	21.8	22.1	22.3	22.6	22.9	23.2	23.4
		23.7	24.0	24.3	24.6	24.9	25.2	25.5	25.8	26.1	26.4	26.7	27.1	27.4	27.7	28.0	28.4	28.7	29.1	29.4	29.8	30.1	30.5	30.9	31.2
		31.6	32.0	32.4	32.8	33.2	33.6	34.0	34.4	34.8	35.2	35.7	36.1	36.5	37.0	37.4	37.9	38.3	38.8	39.2	39.7	40.2	40.7	41.2	41.7
		42.2	42.7	43.2	43.7	44.2	44.8	45.3	45.9	46.4	47.0	47.5	48.1	48.7	49.3	49.9	50.5	51.1	51.7	52.3	53.0	53.6	54.2	54.9	55.6
		56.2	56.9	57.6	58.3	59.0	59.7	60.4	61.2	61.9	62.6	63.4	64.2	64.9	65.7	66.5	67.3	68.1	69.0	69.8	70.6	71.5	72.3	73.2	74.1
±0.05%	75.0	75.9	76.8	77.7	78.7	79.6	80.6	81.6	82.5	83.5	84.5	85.6	86.6	87.6	88.7	89.8	90.9	92.0	93.1	94.2	95.3	96.5	97.6	98.8	