




DRM Auxiliary Relay

DRM 270 Relay
 2 change over contacts
 AC/DC coil

- Small size with high sensitivity
- Reasonable structure with wide usage
- Various types available
- Approvals with TÜV CE



Circuit diagram
 PIN top view
 Dimensions are in mm

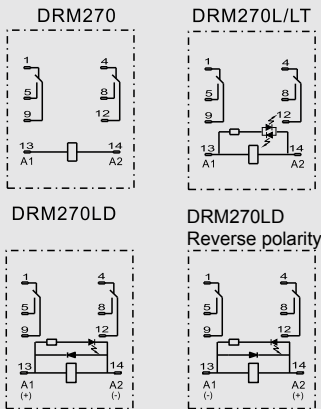

Output

Load (resistive)	10 A / 250 Vac
Switching power (resistive)	2500 VA, 300W
Contact resistance (initial)	≤ 50 mΩ
Min. load voltage / current	12 V / 10 mA or 5 V / 1 mA (gold plated contact)
Contact material	Silver alloy or silver alloy with gold plating
Electrical endurance / Mechanical endurance	> 25×10 ⁴ (1800 Ops/h) / > 2×10 ⁷ (18000 Ops/h)
Response / dropout delay at rated voltage	≤ 20 ms / ≤ 20 ms
Dielectric strength: Between Coil-contacts / open contacts / adjacent contacts	2000VAC/1min / 1000VAC/1min / 2000VAC/1min (leakage current: 1mA)

Input


Response voltage @ 25°C	DC: ≥ 75% of raged voltage, AC: ≥ 80% of raged voltage
Dropout voltage @ 25°C	DC: ≥ 10% of raged voltage, AC: ≥ 30% of raged voltage
Max. voltage @ 25°C	110% of raged voltage
Insulation resistance	≥ 1000 MΩ
Coil power consumption	DC: ≤ 0.9 W, AC: 1.2 VA

General


Ambient temperature	DC: -40 °C...+60°C, AC: -40 °C...+55°C
Storage temperature	-40 °C...+70°C
Humidity	35%~85% RH
Atmospheric pressure	86-106KPa
Shock resistance	10G (half wave of sine pulse: 11ms)
Vibration resistance	10~55Hz dual amplitude: 1.0mm 10~55Hz
Mounting	Push-in connection or PCB welding
Weight	35 g
Min. in package	20 pcs

Application


DRM270 electrical life

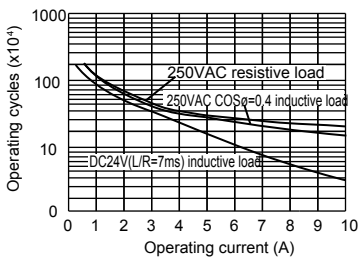

Max. DC load break capacity



Temperature derating curve

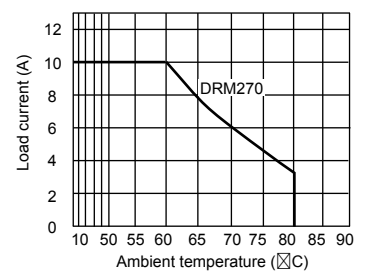

DRM Auxiliary Relay

DRM 270 Relay
2 change over contacts
AC/DC coil

Type code

Type DRM	DRM					
Type of construction	2 change over contact					
Coil voltage	006 6Vdc / 012 12Vdc 024 24Vdc / 048 48Vdc 110 110Vdc / 220 220Vdc 524 24Vac / 548 48Vac 615 115Vac / 730 230Vac					
LED	L (Red for AC coil; green for DC coil)					
Test lever	T (Red for AC coil; green for DC coil)					
Suppressor diode	D					

Ordering information	24 V AC 2CO	48 V AC 2CO	115 V AC 2CO	230 V AC 2CO	
Input					
Rated voltage	24 V AC	48 V AC	115 V AC	230 V AC	
Rated current (50Hz / 60Hz)	62.4mA/52.2mA	33.3mA/27.8mA	12.6mA/10.8mA	6.1mA/5.2mA	
Coil resistance	160Ω ±10%	600Ω ±10%	3.750Ω ±10%	16.000Ω ±10%	
Response / dropout voltage	19.2V / 7.2V	38.4V / 14.4V	92V / 34.5V	184V / 69V	
Max. voltage	26.4V	52.8V	126.5V	253V	
Power consumption	1.0~1.2VA(60Hz)	1.0~1.2VA(60Hz)	1.0~1.2VA(60Hz)	1.0~1.2VA(60Hz)	

Ordering information					
Standard	Type	DRM270524	DRM270548	DRM270615	DRM270730
	Order No.	7760056055	7760056056	7760056057	7760056058
With LED	Type	DRM270524L	DRM270548L	DRM270615L	DRM270730L
	Order No.	7760056064	7760056065	7760056066	7760056067
With LED and test lever	Type	DRM270524LT	DRM270548LT	DRM270615LT	DRM270730LT
	Order No.	7760056073	7760056074	7760056075	7760056076
With LED, gold plated contact	Type				DRM270730L Au
	Order No.				7760056184
With LED and test lever, gold plated contact	Type				DRM270730LT Au
	Order No.				7760056186
Note					


Ordering information	12 V DC 2CO	24 V DC 2CO	48 V DC 2CO	110 V DC 2CO	220 V DC 2CO
Input					
Rated voltage	12 V DC	24 V DC	48 V DC	110V DC	220V DC
Rated current	75mA	36.9mA	18.5mA	10mA	5.2mA
Coil resistance	160Ω ±10%	650Ω ±10%	2,600Ω ±10%	11,000Ω ±10%	44,000Ω ±10%
Response / dropout voltage	9V / 1.2V	18V / 2.4V	36V / 4.8V	82.5V / 11V	165V / 22V
Max. voltage	13.2V	26.4V	52.8V	121.0V	242V
Power consumption	0.9W	0.9W	0.9W	0.9W	0.9W

Ordering information					
Relay					
Standard	Type	DRM270012	DRM270024	DRM270048	DRM270110
	Order No.	7760056050	7760056051	7760056052	7760056053
With LED	Type	DRM270012L	DRM270024L	DRM270048L	DRM270110L
	Order No.	7760056059	7760056060	7760056061	7760056062
With LED and test lever	Type	DRM270012LT	DRM270024LT	DRM270048LT	DRM270110LT
	Order No.	7760056068	7760056069	7760056070	7760056071
With LED and suppressor diode	Type		DRM270024LD		
	Order No.		7760056077		
With LED, gold plated contact	Type		DRM270024L Au		
	Order No.		7760056183		
With LED and test lever, gold plated contact	Type		DRM270024LT Au		
	Order No.		7760056185		


DRM Auxiliary Relay

DRM 570 Relay
 4 change over contacts
 AC/DC coil

- Small size with high sensitivity
- Reasonable structure with wide usage
- Various types available
- Approvals with TÜV CE






Circuit diagram
 PIN top view
 Dimensions are in mm

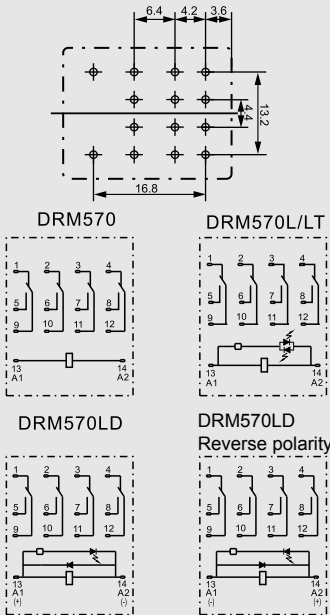

Output	
Load (resistive)	10 A / 250 Vac
Switching power (resistive)	2500 VA, 300W
Contact resistance (initial)	≤ 50 mΩ
Min. load voltage / current	12 V / 10 mA or 5 V / 1 mA (gold plated contact)
Contact material	Silver alloy or silver alloy with gold plating
Electrical endurance / Mechanical endurance	> 25×10 ⁴ (1800 Ops/h) / > 2×10 ⁷ (18000 Ops/h)
Response / dropout delay at rated voltage	≤ 20 ms / ≤ 20 ms
Dielectric strength: Between Coil-contacts / open contacts / adjacent contacts	2000VAC/1min / 1000VAC/1min / 2000VAC/1min (leakage current: 1mA)
Input	
Response voltage @ 25°C	DC: ≥ 75% of raged voltage, AC: ≥ 80% of raged voltage
Dropout voltage @ 25°C	DC: ≥ 10% of raged voltage, AC: ≥ 30% of raged voltage
Max. voltage @ 25°C	110% of raged voltage
Insulation resistance	≥ 1000 MΩ
Coil power consumption	DC: ≤ 0.9 W, AC: 1.2 VA
General	
Ambient temperature	DC: -40 °C...+60°C, AC: -40 °C...+55°C
Storage temperature	-40°C...+70°C
Humidity	35%~85% RH
Atmospheric pressure	86-106KPa
Shock resistance	10G (half wave of sine pulse: 11ms)
Vibration resistance	10~55Hz dual amplitude: 1.0mm 10~55Hz
Mounting	Push-in connection or PCB welding
Weight	35 g
Min. in package	20 pcs

Application

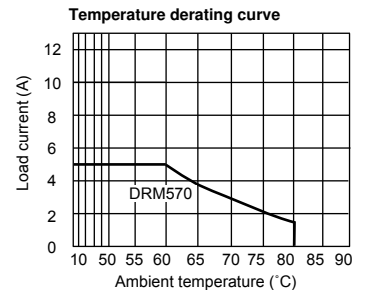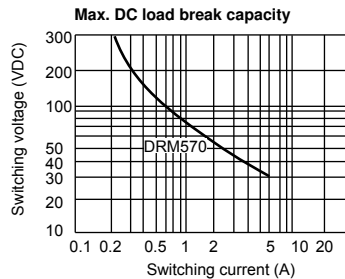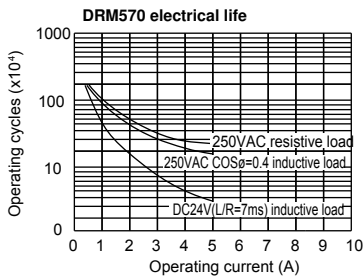

DRM Auxiliary Relay

DRM 570 Relay
4 change over contacts
AC/DC coil

Type code

Type DRM

Type of construction
4 change over contact

Coil voltage

006 6Vdc / 012 12Vdc
024 24Vdc / 048 48Vdc
110 110Vdc / 220 220Vdc
524 24Vac / 548 48Vac
615 115Vav / 730 230Vac

LED L (Red for AC coil; green for DC coil)

Test lever T (Red for AC coil; green for DC coil)

Suppressor diode D

DRM

Ordering information

Input

	24 V AC 4CO	48 V AC 4CO	115 V AC 4CO	230 V AC 4CO
Rated voltage	24 V AC	48 V AC	115 V AC	230 V AC
Rated current (50Hz / 60Hz)	62.4mA/52.2mA	33.3mA/27.8mA	12.6mA/10.8mA	6.1mA/5.2mA
Coil resistance	160Ω ±10%	615Ω ±10%	4,340Ω ±10%	15,000Ω ±10%
Response / dropout voltage	19.2V / 7.2V	38.4V / 14.4V	92V / 34.5V	184V / 69V
Max. voltage	26.4V	52.8V	126.5V	253V
Power consumption	1.0~1.2VA(60Hz)	1.0~1.2VA(60Hz)	1.0~1.2VA(60Hz)	1.0~1.2VA(60Hz)

Ordering information

	24 V AC 4CO	48 V AC 4CO	115 V AC 4CO	230 V AC 4CO
Standard Type	DRM570524	DRM570548	DRM570615	DRM570730
Order No.	7760056083	7760056084	7760056085	7760056086
With LED Type	DRM570524L	DRM570548L	DRM570615L	DRM570730L
Order No.	7760056092	7760056093	7760056094	7760056095
With LED and test lever Type	DRM570524LT	DRM570548LT	DRM570615LT	DRM570730LT
Order No.	7760056101	7760056102	7760056103	7760056104
With LED, gold plated contact Type				DRM570730L Au
Order No.				7760056188
With LED and test lever, gold plated contact Type				DRM570730LT Au
Order No.				7760056190

Note

Ordering information

Input


	12 V DC 4CO	24 V DC 4CO	48 V DC 4CO	110 V DC 4CO	220 V DC 4CO
Rated voltage	12 V DC	24 V DC	48 V DC	110V DC	220V DC
Rated current	75mA	36.9mA	18.5mA	10mA	5.2mA
Coil resistance	160Ω ±10%	630Ω ±10%	2,600Ω ±10%	11,000Ω ±10%	42,000Ω ±10%
Response / dropout voltage	9V / 1.2V	18V / 2.4V	36V / 4.8V	82.5V / 11V	165V / 22V
Max. voltage	13.2V	26.4V	52.8V	121.0V	242V
Power consumption	0.9W	0.9W	0.9W	0.9W	0.9W


Ordering information

	12 V DC 4CO	24 V DC 4CO	48 V DC 4CO	110 V DC 4CO	220 V DC 4CO
Standard Type	DRM570012	DRM570024	DRM570048	DRM570110	DRM570220
Order No.	7760056078	7760056079	7760056080	7760056081	7760056082
With LED Type	DRM570012L	DRM570024L	DRM570048L	DRM570110L	DRM570220L
Order No.	7760056087	7760056088	7760056089	7760056090	7760056091
With LED and test lever Type	DRM570012LT	DRM570024LT	DRM570048LT	DRM570110LT	DRM570220LT
Order No.	7760056096	7760056097	7760056098	7760056099	7760056100
With LED and suppressor diode Type		DRM570024LD			
Order No.		7760056105			
With LED, gold plated contact Type		DRM570024L Au			
Order No.		7760056187			
With LED and test lever, gold plated contact Type		DRM570024LT Au			
Order No.		7760056189			

DRL Power Relay


DRL Power Relay
1 or 2 change over contacts, AC/DC coil

- Arc shield
- High dielectric strength: 2,000 V
- Approvals with 

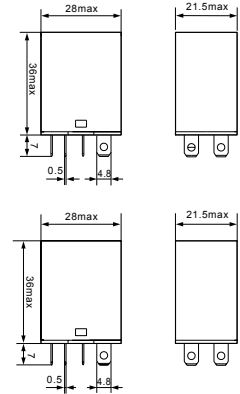


Circuit diagram
PIN top view
Dimensions are in mm

1CO



2CO



Output

Max. switching voltage	250 V AC
Continuous current	16 A @ 1CO / 10A @ 2CO
Contact material	AgCdO
Min. load voltage / current	12 V / 100 mA
Contact resistance (initial)	< 50 mΩ
Electrical endurance	> 10 × 10 ⁴ cycles (1,800 cycles / hour)
Response / dropout delay	< 20 ms / < 20 ms





Input

Response voltage @ 25° C	AC: ≤ 80% of rated voltage DC: ≤ 75% of rated voltage
Dropout voltage @ 25° C	AC: ≥ 30% of rated voltage DC: ≥ 10% of rated voltage
Max. voltage @ 25° C	110% of rated voltage
Coil power consumption	1.2 VA / 0.9 W

General

Operation temperature	- 25 ... 55° C
Storage temperature	- 25 ... 55° C
Humidity	35 ... 85 %
Dielectric strength	Coil-contact Between N.O. contacts Between adjacent contacts
Clearance / creepage distance	1.5 mm / 4 mm
Insulation IEC60664	

Rated voltage	250 V
Pollution category	3
Over voltage category	III
Vibration resistance	10~55Hz dual amplitude: 1.0mm
Shock resistance	10G (half wave of sine pulse: 11ms)
Approval	CE; TÜV; UL
Weight	35 g
Min. in package	20 pcs
Dimension	
Length x Width x Height	28 x 21.5 x 43 mm

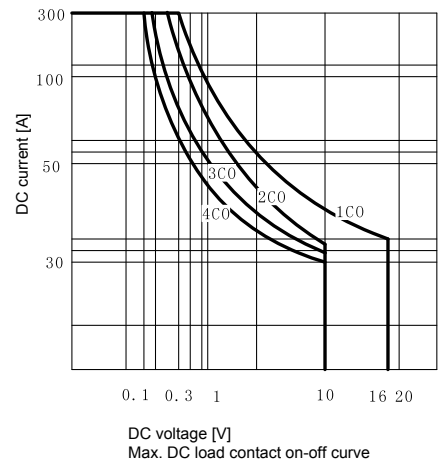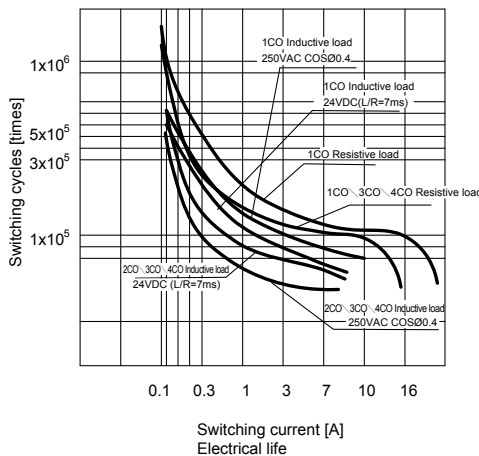

DRL Power Relay

DRL Power Relay
1 or 2 change over contacts, AC/DC coil

Type code	DRL			
Type code				
Type	DRL			
Type of construction	170	1 change over contact		
	270	2 change over contacts		
Coil voltage	012	12Vdc / 024	24Vdc	
	048	48Vdc / 110	110Vdc	
	220	220Vdc / 524	24Vac	
	615	115Vac / 730	230Vac	
LED indicator				

Ordering information	12 V DC	24 V DC	48 V DC	110 V DC	220 V DC
Input					
Rated voltage	12 V DC	24 V DC	48 V DC	110 V DC	220 V DC
Response / dropout voltage	9 V / 1.2 V	18 V / 2.4 V	36 V / 4.8 V	82.5 V / 11 V	165 V / 22 V
Power consumption	0.9 W	0.9 W	0.9 W	0.9 W	0.9 W
Rated coil current	75 mA	36.9 mA	18.5 mA	10 mA	5.2 mA
Coil resistance	160Ω ±10%	650Ω ±10%	2,600Ω ±10%	11,000Ω ±10%	42,000Ω ±10%


Ordering information					
1 change over contact 1CO Type	DRL170012L	DRL170024L	DRL170048L	DRL170110L	DRL170220L
Order No.	1133450000	1133460000	1133470000	1133480000	1133490000
2 change over contact 2CO Type	DRL270012L	DRL270024L	DRL270048L	DRL270110L	DRL270220L
Order No.	1133510000	1133520000	1133530000	1133540000	1133550000


Ordering information	24 V AC	115 V AC	230 V AC		
Input					
Rated voltage	24 V AC	115 V AC	230 V AC		
Response / dropout voltage	19.2 V / 7.2 V	92 V / 34.5 V	184 V / 69 V		
Power consumption	1.2 VA	1.2 VA	1.2 VA		
Rated coil current (50 Hz)	54 mA	12.9 mA	6.8 mA		
Coil resistance	160Ω ±10%	3,750Ω ±10%	13,000Ω ±10%		

Ordering information					
1 change over contact 1CO Type	DRL170524L	DRL170615L	DRL170730L		
Order No.	1133840000	1133850000	1133860000		
2 change over contact 2CO Type	DRL270524L	DRL270615L	DRL270730L		
Order No.	1133870000	1133880000	1133890000		

DRL Power Relay


DRL Power Relay
3 or 4 change over contacts, AC/DC coil

- Arc shield
- High dielectric strength: 2,000 V
- Approvals with 

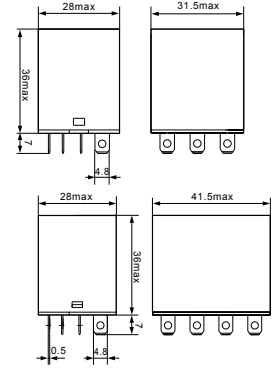


Circuit diagram
PIN top view
Dimensions are in mm

3CO



4CO



Output

Max. switching voltage	250 V AC
Continuous current	10A
Contact material	AgCdO
Min. load voltage / current	12 V / 100 mA
Contact resistance (initial)	< 50 mΩ
Electrical endurance	> 10 × 10 ⁴ cycles (1,800 cycles / hour)
Response / dropout delay	< 20 ms / < 20 ms

Input

Response voltage @ 25° C	AC: ≤ 80% of rated voltage DC: ≤ 75% of rated voltage
Dropout voltage @ 25° C	AC: ≥ 30% of rated voltage DC: ≥ 10% of rated voltage
Max. voltage @ 25° C	110% of rated voltage
Coil power consumption	3CO:2 VA / 1.4 W; 4CO:2.5 VA / 1.5 W

General

Operation temperature	- 25 ... 55°C
Storage temperature	- 25 ... 55°C
Humidity	35 ... 85 %
Electrical strength	Coil-contact: 2000V AC / 1 min Between N.O. contacts: 1000V AC / 1 min Between adjacent contacts: 2000V AC / 1 min
Clearance / creepage distance	1.5 mm / 4 mm

Insulation IEC60664

Rated voltage	250 V
Pollution category	3
Over voltage category	III





Vibration resistance	10~55Hz dual amplitude: 1.0mm
Shock resistance	10G (half wave of sine pulse: 11ms)

Approval	CE; TÜV; UL
Weight	3CO: 50g; 4CO: 65g

Min. in package	10
-----------------	----

Dimension

Length x Width x Height	28 x 21.5 x 43 mm
-------------------------	-------------------

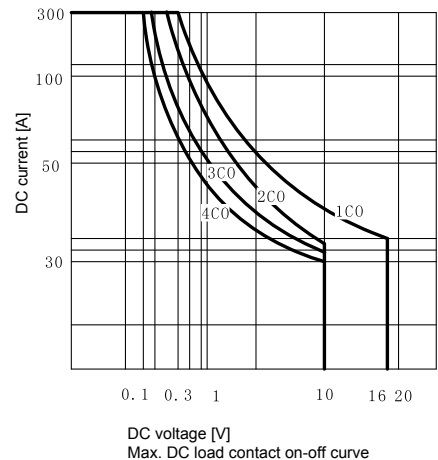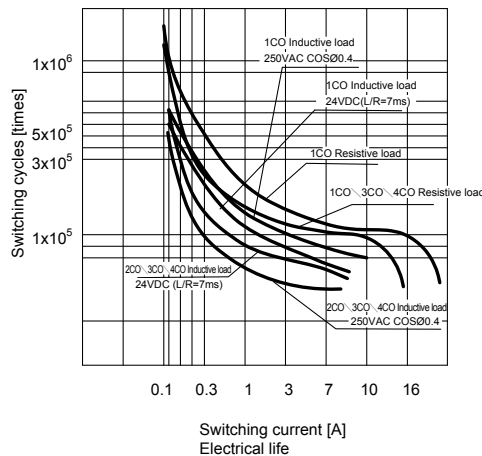

DRL Power Relay

DRL Power Relay
3 or 4 change over contacts, AC/DC coil

Type code **DRL**

Type code
Type DRL
Type of construction
370 3 change over contact
570 4 change over contacts

Coil voltage
012 12Vdc / 024 24Vdc
048 48Vdc / 110 110Vdc
220 220Vdc / 524 24Vac
615 115Vac / 730 230Vac

LED indicator

Ordering information	12 V DC		24 V DC		48 V DC		110 V DC		220 V DC	
Input										
Rated voltage	12 V DC		24 V DC		48 V DC		110 V DC		220 V DC	
Response / dropout voltage	9 V / 1.2 V		18 V / 2.4 V		36 V / 4.8 V		82.5 V / 11 V		165 V / 22 V	
	3CO	4CO	3CO	4CO	3CO	4CO	3CO	4CO	3CO	4CO
Power consumption	1.4 W	1.5 W	1.4 W	1.5 W	1.4 W	1.5 W	1.4 W	1.5 W	1.4 W	1.5 W
Rated coil current	120 mA	125 mA	60 mA	66.7 mA	30 mA	31.2 mA	13.1 mA	16.2 mA	6.7 mA	7.6 mA
Coil resistance	100Ω ±10% 96Ω ±10%		400Ω ±10% 360Ω ±10%		1,600Ω ±10% 1,540Ω ±10%		8,400Ω ±10% 6,800Ω ±10%		33,000Ω ±10% 29,000Ω ±10%	

Ordering information	12 V DC		24 V DC		48 V DC		110 V DC		220 V DC	
3 change over contact 3CO Type	DRL370012L		DRL370024L		DRL370048L		DRL370110L		DRL370220L	
Order No.	1133570000		1133580000		1133590000		1133600000		1133610000	
4 change over contact 4CO Type	DRL570012L		DRL570024L		DRL570048L		DRL570110L		DRL570220L	
Order No.	1133620000		1133630000		1133640000		1133650000		1133660000	


Ordering information	24 V AC		115 V AC		230 V AC					
Input										
Rated voltage	24 V AC		115 V AC		230 V AC					
Response / dropout voltage	19.2 V / 7.2 V		92 V / 34.5 V		184 V / 69 V					
	3CO	4CO	3CO	4CO	3CO	4CO				
Power consumption	2 VA	2.5 VA	2 VA	2.5 VA	2 VA	2.5 VA				
Rated coil current (50 Hz)	80 mA	93.5 mA	16 mA	25.5 mA	10 mA	13.1 mA				
Coil resistance	102Ω ±10% 80Ω ±10%		2,300Ω ±10% 1,680Ω ±10%		8,600Ω ±10% 6700Ω ±10%					

Ordering information	24 V AC		115 V AC		230 V AC					
3 change over contact 3CO Type	DRL370524L		DRL370615L		DRL370730L					
Order No.	1133910000		1133920000		1133930000					
4 change over contact 4CO Type	DRL570524L		DRL570615L		DRL570730L					
Order No.	1133940000		1133950000		1133960000					

DRR Power Relay


DRR Power Relay
2 change over contacts, AC/DC coil

- 2500 VA switchover capacity
- 8-pin plug in DIN rail installation
- Approvals with TÜV CE

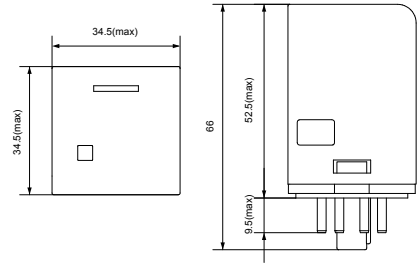


Circuit diagram
PIN top view
Dimensions are in mm

AC



DC



Output

Max. switching voltage	250 V AC
Continuous current	10A
Contact material	AgCdO
Min. load voltage / current	12 V / 100 mA
Contact resistance (initial)	< 50 mΩ
Electrical endurance	> 10 × 10 ⁴ cycles (1,800 cycles / hour)
Response / dropout delay	< 30 ms / < 20 ms

Input





Response voltage @ 25°C	AC: ≤ 80% of rated voltage DC: ≤ 75% of rated voltage
Dropout voltage @ 25°C	AC: ≥ 30% of rated voltage DC: ≥ 15% of rated voltage
Max. voltage @ 25°C	110% of rated voltage
Coil power consumption	2.7 VA / 1.5 W

General

Operation temperature	- 25 ... 55°C
Storage temperature	- 25 ... 55°C
Humidity	5 ... 85 %
Electrical strength	Coil-contact: 2500V AC / 1 min Between N.O. contacts: 1000V AC / 1 min Between adjacent contacts: 2500V AC / 1 min
Clearance / creepage distance	1.5 mm / 4 mm
Insulation IEC60664	

Rated voltage	250 V
Pollution category	3
Over voltage category	III
Vibration resistance	10~55Hz dual amplitude: 1.0mm
Shock resistance	10G (half wave of sine pulse: 11ms)
Approval	CE; TÜV; UL
Weight	75g
Min. in package	10

Dimension	
Length x Width x Height	34.5 x 34.5 x 66 mm

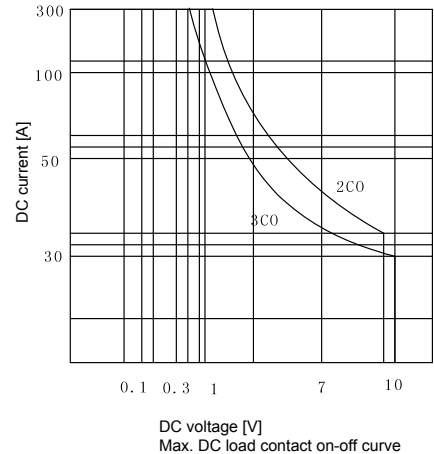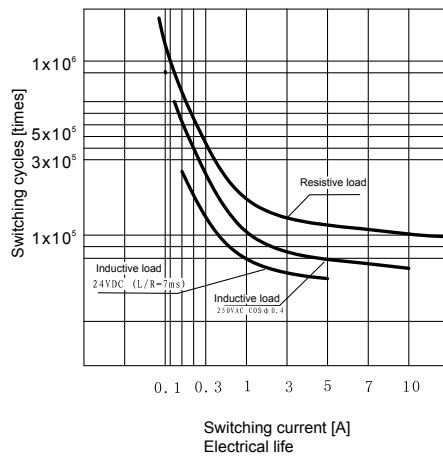

DRR Power Relay

DRL Power Relay
2 change over contacts, AC/DC coil

Type code	DRR			
Type code				
Type DRR				
Type of construction	270	2 change over contacts		
Coil voltage	012	12Vdc / 024	24Vdc	
	048	48Vdc / 110	110Vdc	
	220	220Vdc / 524	24Vac	
	615	115Vac / 730	230Vac	
LED indicator				

Ordering information	12 V DC 2CO	24 V DC 2CO	48 V DC 2CO	110 V DC 2CO	220 V DC 2CO
Input					
Rated voltage	12 V DC	24 V DC	48 V DC	110 V DC	220 V DC
Response / dropout voltage	9 V / 1.8 V	18 V / 3.6 V	36 V / 7.2 V	82.5 V / 16.5 V	165 V / 33 V
Power consumption	1.5 W	1.5 W	1.5 W	1.5 W	1.5 W
Rated coil current	125 mA	55.8 mA	29.3 mA	14.9 mA	7.5 mA
Coil resistance	96Ω ±10%	430Ω ±10%	1640Ω ±10%	7360Ω ±10%	29500Ω ±10%

Ordering information					
Type	DRR270012L	DRR270024L	DRR270048L	DRR270110L	DRR270220L
Order No.	1133360000	1133370000	1133380000	1133390000	1133400000


Ordering information	24 V AC 2CO	115 V AC 2CO	230 V AC 2CO		
Input					
Rated voltage	24 V AC	115 V AC	230 V AC		
Response / dropout voltage	19.2 V / 7.2 V	92 V / 34.5 V	184 V / 69 V		
Power consumption	2.7 VA	2.7 VA	2.7 VA		
Rated coil current (50 Hz/60Hz)	130 mA/116 mA	29.8 mA/25.4 mA	14.9 mA/12.7 mA		
Coil resistance	62.5Ω ±10%	1250Ω ±10%	6500Ω ±10%		

Ordering information					
Type	DRR270524L	DRR270615L	DRR270730L		
Order No.	1133760000	1133780000	1133800000		


DRR Power Relay

DRR Power Relay
3 change over contacts, AC/DC coil

- 2500 VA switchover capacity
- 11-pin plug in DIN rail installation
- Approvals with TÜV CE

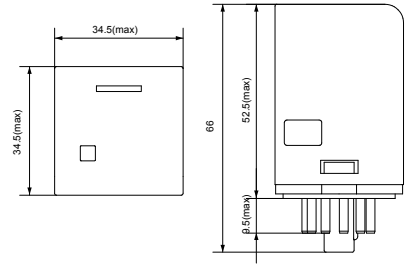

Circuit diagram
PIN top view
Dimensions are in mm

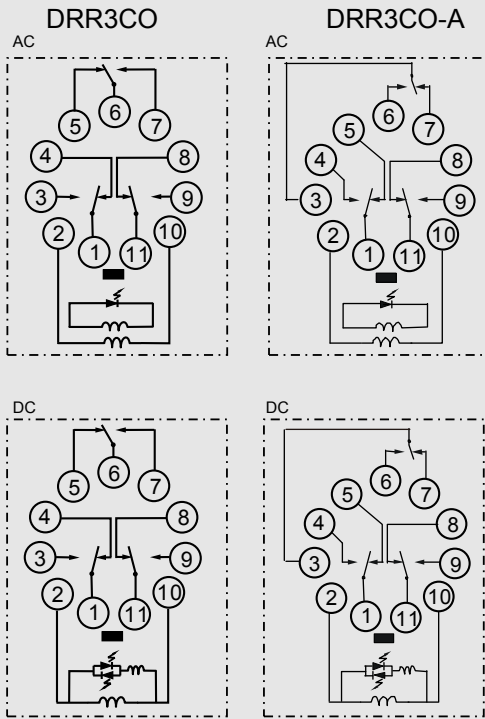

Output

Max. switching voltage	250 V AC
Continuous current	10A
Contact material	AgNi 90/10
Min. load voltage / current	12 V / 100 mA
Contact resistance (initial)	< 50 mΩ
Electrical endurance	> 10 × 10 ⁴ cycles (1,800 cycles / hour)
Response / dropout delay	< 30 ms / < 20 ms

Input

Response voltage @ 25°C	AC: ≤ 80% of rated voltage DC: ≤ 80% of rated voltage
Dropout voltage @ 25°C	AC: ≥ 30% of rated voltage DC: ≥ 15% of rated voltage

Max. voltage @ 25°C	110% of rated voltage
Coil power consumption	2.7 VA / 1.5 W

General

Operation temperature	- 25 ... 55°C
Storage temperature	- 25 ... 55°C
Humidity	5 ... 85 %

Electrical strength	Coil-contact	2500V AC / 1 min
	Between N.O. contacts	1000V AC / 1 min
	Between adjacent contacts	2500V AC / 1 min

Clearance / creepage distance	1.5 mm / 4 mm
-------------------------------	---------------

Insulation IEC60664	
---------------------	--

Rated voltage	250 V
Pollution category	3
Over voltage category	III

Vibration resistance	10~55Hz dual amplitude: 1.0mm
Shock resistance	10G (half wave of sine pulse: 11ms)





Approval	CE; TÜV; UL
----------	-------------

Weight	75g
--------	-----

Min. in package	10
-----------------	----

Dimension

Length x Width x Height	34.5 x 34.5 x 66 mm
-------------------------	---------------------

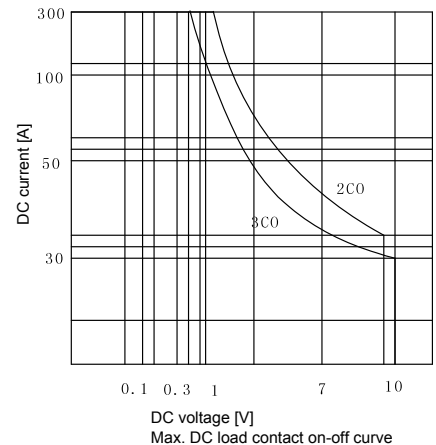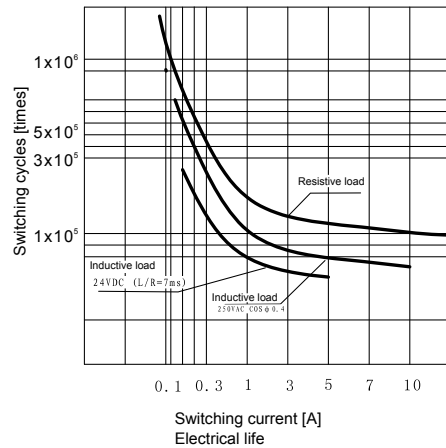

DRR Power Relay

DRL Power Relay
3 change over contacts, AC/DC coil

Type code	DRR			
Type DRR				
Type of construction	370 3 change over contacts			
Coil voltage	012 12Vdc / 024 24Vdc 048 48Vdc / 110 110Vdc 220 220Vdc / 524 24Vac 615 115Vac / 730 230Vac			
LED indicator				

Ordering information	12 V DC 3CO	24 V DC 3CO	48 V DC 3CO	110 V DC 3CO	220 V DC 3CO
Input					
Rated voltage	12 V DC	24 V DC	48 V DC	110 V DC	220 V DC
Response / dropout voltage	9 V / 1.8 V	18 V / 3.6 V	36 V / 7.2 V	82.5 V / 16.5 V	165 V / 33 V
Power consumption	1.5 W	1.5 W	1.5 W	1.5 W	1.5 W
Rated coil current	125 mA	55.8 mA	29.3 mA	14.9 mA	7.5 mA
Coil resistance	96Ω ±10%	430Ω ±10%	1640Ω ±10%	7360Ω ±10%	29500Ω ±10%

Ordering information					
Type	DRR370012L	DRR370024L	DRR370048L	DRR370110L	DRR370220L
Order No.	1133410000	1133420000	1133430000	1133440000	1133560000
Type	DRR370012L-A	DRR370024L-A	DRR370048L-A	DRR370110L-A	DRR370220L-A
Order No.	7760056250	7760056251	7760056252	7760056253	7760056254



Ordering information	24 V AC 3CO	115 V AC 3CO	230 V AC 3CO		
Input					
Rated voltage	24 V AC	115 V AC	230 V AC		
Response / dropout voltage	19.2 V / 7.2 V	92 V / 34.5 V	184 V / 69 V		
Power consumption	2.7 VA	2.7 VA	2.7 VA		
Rated coil current (50 Hz/60Hz)	130 mA/116 mA	29.8 mA/25.4 mA	14.9 mA/12.7 mA		
Coil resistance	62.5Ω ±10%	1250Ω ±10%	6500Ω ±10%		

Ordering information					
Type	DRR370524L	DRR370615L	DRR370730L		
Order No.	1133810000	1133820000	1133830000		
Type	DRR370524L-A	DRR370615L-A	DRR370730L-A		
Order No.	7760056255	7760056256	7760056257		

RRD Power Relay


RRD Relay
2 change over contacts
AC/DC coil

- 2500 VA switchover capacity
- With test lever
- Approvals with VDE us



Circuit diagram

PIN top view
Dimensions are in mm



Output

Max. switching voltage	250 V AC
Continuous current	10A
Contact material	AgNi 90/10
Mechanical endurance	20x10 ⁶ switching cycles
Response / dropout delay at rated voltage	12 ms / 5 ms

General

Operation temperature	- 45°C ... 55°C
UL 94 fire retardant class	V-0
Approval	cURus; CE; VDE

Insulation coordination

Electrical strength	
Coil-contact	2,500V AC / 1 min
Between N.O. contacts	1,500V AC / 1 min
Between adjacent contacts	2,500V AC / 1 min
Clearance / creepage distance	2.8 mm / 4 mm

Insulation IEC60664


Rated voltage	250 V
Pollution category	3
Over voltage category	III
Insulation VDE 0110b (2/79)	C / 250
Dielectric index of relay socket	CTI 175

Dimension


Length x Width x Height 35.5 x 35.5 x 57 mm

Application


DC load breaking capacity





DC coil operation range



Electrical life



AC coil operation range

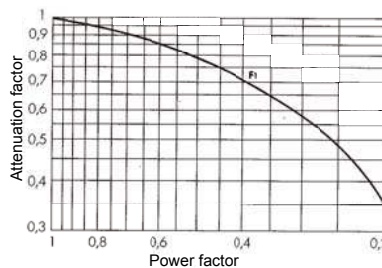

Derating curve at COSφ<1 (inductive load)
Actual action times = action times in resistive load x factor in the table

RRD Power Relay

RRD Relay
2 change over contacts
AC/DC coil

Type code

Type RIDER Round

Contacts

- 2 2 change over contact, 8-pin
- 3 3 change over contacts, 11-pin

Contact material

2 AgNi 90/10

Type of construction

- 1 DC with test lever
- 3 DC with test lever and bipolar LED
- 6 AC with test lever
- 8 AC with test lever and bipolar LED

RRD

DC Coil

- | | | |
|-----|----------|-----|
| 006 | 6 V DC | |
| 012 | 12 V DC | |
| 024 | 24 V DC | 0C4 |
| 048 | 48 V DC | 0E8 |
| 060 | 60 V DC | 0G0 |
| 110 | 110 V DC | 1B0 |
| 220 | 220 V DC | 2C0 |

AC Coil

- | | |
|-----|----------|
| 506 | 6 V AC |
| 512 | 12 V AC |
| 524 | 24 V AC |
| 548 | 48 V AC |
| 615 | 115 V AC |
| 730 | 230 V AC |

Free wheel diode

Ordering information

Input

	24 V DC 2CO	48 V DC 2CO	110 V DC 2CO	220 V DC 2CO
Rated voltage	24 V DC	48 V DC	110 V DC	220 V DC
Response / dropout voltage	18.0 V / 2.4 V	36.0 V / 4.8 V	82.5 V / 11.5 V	165 V / 22 V
Power consumption	1,2 W	1,2 W	1,2 W	1,2 W
Rated coil current	50.5 mA	24.0 mA	11.0 mA	5,5 mA
Coil resistance	475 Ω ± 10%	2000 Ω ± 10%	10000 Ω ± 12%	40000 Ω ± 15%

Ordering information

	24 V DC 2CO	48 V DC 2CO	110 V DC 2CO	220 V DC 2CO
With test lever	RRD221024	RRD221048	RRD221110	
AgNi 90/10	8690370000	8690390000	8690410000	
With test lever and LED	RRD223024	RRD223048	RRD223110	RRD223220
AgNi 90/10	8690380000	8690400000	8690420000	8798600000
Type				
Order No.				

Ordering information

Input

	24 V AC 2CO	48 V AC 2CO	115 V AC 2CO	230 V AC 2CO
Rated voltage	24 V AC	48 V AC	115 V AC	230 V AC
Response / dropout voltage	19.2 V / 9.6 V	38.4 V / 19.2 V	92.0 V / 46.0 V	184.0 V / 92.0 V
Power consumption	2,3 VA	2,3 VA	2,3 VA	2,3 VA
Rated coil current	94.2 mA	47.5 mA	20.6 mA	10.1 mA
Coil resistance	86 Ω ± 10%	345 Ω ± 10%	2000 Ω ± 10%	8300 Ω ± 12%

Ordering information Relay


	24 V AC 2CO	48 V AC 2CO	115 V AC 2CO	230 V AC 2CO
With test lever	RRD226024	RRD226048	RRD226115	RRD226230
AgNi 90/10	8690270000	8690290000	8690310000	8690330000
With test lever and LED	RRD228024	RRD228048	RRD228115	RRD228230
AgNi 90/10	8690280000	8690300000	8690320000	8690340000
Type				
Order No.				

Note


RRD Power Relay

RRD Relay
3 change over contacts
AC/DC coil

- 2500 VA switchover capacity
- With test lever
- Approvals with VDE us

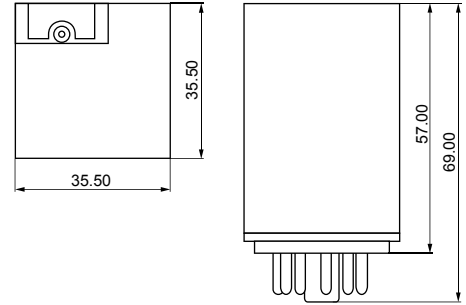

Circuit diagram
PIN top view
Dimensions are in mm



Output

Max. switching voltage	250 V AC
Continuous current	10A
Contact material	AgNi 90/10
Mechanical endurance	20x10 ⁶ switching cycles
Response / dropout delay at rated voltage	12 ms / 5 ms

General

Operation temperature	AC Coil- 45°C ... 50°C/DC Coil- 45°C ... 60°C
UL 94 fire retardant class	V-0
Approval	cURus; CE; VDE

Insulation coordination

Electrical strength	Coil-contact	2,500V AC / 1 min
	Between N.O. contacts	1,500V AC / 1 min
	Between adjacent contacts	2,500V AC / 1 min
Clearance / creepage distance	2.8 mm / 4 mm	
Insulation IEC60664		
	Rated voltage	250 V
	Pollution category	3
	Over voltage category	III
Insulation VDE 0110b (2/79)		C / 250
Dielectric index of relay socket		CTI 175


Dimension

Length x Width x Height 35.5 x 35.5 x 57 mm


Note

Application




DC load breaking capacity



DC coil operation range



Electrical life

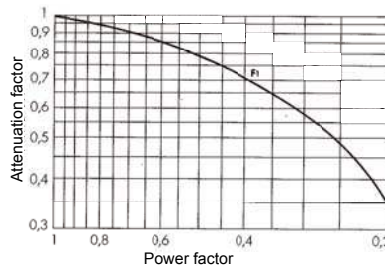

Derating curve at $\cos\phi < 1$ (inductive load)
Actual action times = action times in resistive load x factor in the table

RRD Power Relay

RRD Relay
3 change over contacts
AC/DC coil

Type code

Type RIDER Round

Contacts

- 2 2 change over contact, 8-pin
- 3 3 change over contacts, 11-pin

Contact material

2 AgNi 90/10

Type of construction

- 1 DC with test lever
- 3 DC with test lever and bipolar LED
- 6 AC with test lever
- 8 AC with test lever and bipolar LED



DC Coil		Free wheel diode
006	6 V DC	
012	12 V DC	
024	24 V DC	0C4
048	48 V DC	0E8
060	60 V DC	0G0
110	110 V DC	1B0
220	220 V DC	2C0
AC Coil		
506	6 V AC	
512	12 V AC	
524	24 V AC	
548	48 V AC	
615	115 V AC	
730	230 V AC	

Ordering information	12 V DC 3CO	24 V DC 3CO	110 V DC 3CO	220 V DC 3CO
Input				
Rated voltage	12 V DC	24 V DC	110 V DC	220 V DC
Response / dropout voltage	9 V / 1.2 V	18 V / 2.4 V	82.5 V / 11.5 V	165 V / 22 V
Power consumption	1.2 W	1.2 W	1.2 W	1.2 W
Rated coil current	109.1 mA	50.5 mA	11 mA	5.5 mA
Coil resistance	110 Ω ± 10%	475 Ω ± 10%	10000 Ω ± 12%	40000 Ω ± 15%

Ordering information				
With test lever Type	RRD321012	RRD321024	RRD32 1110	RRD321220
AgNi 90/10 Order No.	8799030000	8690610000	8690650000	7940007742
With test lever and LED Type		RRD323024	RRD3231 10	RRD323220
AgNi 90/10 Order No.		8690620000	8690660000	8798610000
With test lever and suppressing diode Type		RRD3210C4	RRD3211B0	RRD3212C0
AgNi 90/10 Order No.		8797650000	8797640000	8797610000
With LED, test lever and suppressing diode Type		RRD3230C4		RRD3232C0
AgNi 90/10 Order No.		7940007732		8829400000

Note				



Ordering information	24 V AC 3CO	48 V AC 3CO	115 V AC 3CO	230 V AC 3CO
Input				
Rated voltage	24 V AC	48 V AC	115 V AC	230 V AC
Response / dropout voltage	19.2 V / 9.6 V	38.4 V / 19.2 V	92 V / 46 V	184 V / 92 V
Power consumption	2.3 VA	2.3 VA	2.3 VA	2.3 VA
Rated coil current	94.2 mA	47.5 mA	20.6 mA	10.1 mA
Coil resistance	86 Ω ± 10%		2000 Ω ± 10%	8300 Ω ± 12%


Ordering information				
With test lever Type	RRD326024	RRD326048	RRD3261 15	RRD326230
AgNi 90/10 Order No.	8690450000	8690470000	8690550000	8690570000
With test lever and LED Type	RRD328024	RRD328048	RRD3281 15	RRD328230
AgNi 90/10 Order No.	8690460000	8690480000	8690560000	8690580000
Type Order No.				

Note				

DRH DC Relay


DRH DC Relay
 1 N.O. contact and 1 N.C. contact
 AC / DC coil

- Suitable to switch heavy DC load
- Arc shield
- With LED and test lever
- Approval with CE   TÜV

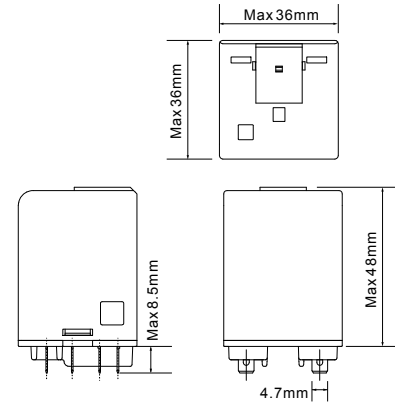


Circuit diagram
 PIN top view
 Dimensions are in mm

1NO



1NC



Output

Max. switching voltage	AC: 500 V; DC: 220 V
Continuous current	16 A@ 500 VAC; 10 A@ 220 VDC
Contact material	AgSnO2
Min. load voltage / current	12 VDC / 100 mA
Contact resistance (initial)	< 50 mΩ
Electrical endurance	> 10 × 10 ⁴ cycles
Response / dropout delay	< 20 ms / < 20 ms
Max. switching frequency at rated load	1 Hz





Input

Response voltage @ 25°C	AC: ≤ 80% of rated voltage DC: ≤ 75% of rated voltage
Dropout voltage @ 25°C	AC: ≥ 30% of rated voltage DC: ≥ 10% of rated voltage
Max. voltage @ 25°C	110% of raged voltage
Coil power consumption	2.5 VA / 1.5 W

General

Operation temperature	- 40°C ... 60°C	
Storage temperature	- 40°C ... 60°C	
Humidity	35 ... 85 %	
Electrical strength	Coil-contact	4,000V AC / 1 min
	Between N.O. contacts	2,500V AC / 1 min
	Between adjacent contacts	4,000V AC / 1 min
Clearance / creepage distance	1.5 mm / 4 mm	
Insulation IEC60664	Rated voltage	400 V
	Pollution category	3
	Over voltage category	III

Vibration resistance	10-55Hz dual amplitude: 1.0mm
Shock resistance	10G (half wave of sine pulse: 11ms)
Approval	CE; TÜV; UL
Weight	48 g
Dimension	
Length x Width x Height	36 x 36 x 48 mm

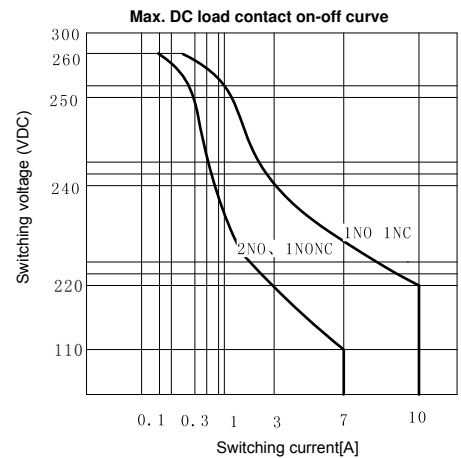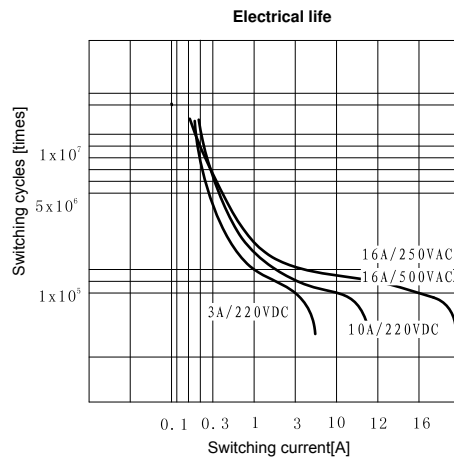

DRH DC Relay

DRH DC Relay
1 N.O. contact and 1 N.C. contact
AC / DC coil

Type code	DRH			
Type DRH				
Type of construction	173 1NO			
	174 1NC			
Coil voltage	012 12Vdc / 024 24Vdc			
	048 48Vdc / 110 110Vdc			
	220 220Vdc / 524 24Vac			
	548 48Vac / 615 115Vac			
	730 230Vac			
With LED or test lever	LT			

Ordering information	12 V DC	24 V DC	48 V DC	110 V DC	220 V DC
Input					
Rated voltage	12 V DC	24 V DC	48 V DC	110 V DC	220 V DC
DC response / dropout voltage	9 V / 1.2 V	18 V / 2.4 V	36 V / 4.8 V	82.5 V / 11 V	165 V / 22 V
Power consumption	1.5 W	1.5 W	1.5 W	1.5 W	1.5 W
DC rated current	120 mA	60 mA	30 mA	13.03 mA	6.7 mA
Coil resistance	100Ω ±10%	400Ω ±10%	1,600Ω ±10%	8,400Ω ±10%	33,000Ω ±10%



Ordering information						
1 N.O. contact	Type	DRH173012LT	DRH173024LT	DRH173048LT	DRH173110LT	DRH173220LT
	Order No.	1219840000	1219850000	1219860000	1219870000	1219880000
1 N.C. contact	Type	DRH174012LT	DRH174024LT	DRH174048LT	DRH174110LT	DRH174220LT
	Order No.	1219940000	1219950000	1219960000	1219970000	1219980000
With test lever locking clip	Type	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW
	Order No.	7760056249	7760056249	7760056249	7760056249	7760056249


Ordering information	24 V AC	48 V AC	115 V AC	230 V AC	
Input					
Rated voltage	24 V AC	48 V AC	115 V AC	230 V AC	
AC response / dropout voltage	19.2V / 7.2 V	38.4 V / 14.4 V	92 V / 34.5 V	184 V / 69 V	
Power consumption	2.5 VA	2.5 VA	2.5 VA	2.5 VA	
AC rated current	101.7 mA	51.04 mA	21.2 mA	10.61 mA	
Coil resistance	100Ω ±10%	350Ω ±10%	2,200Ω ±10%	8,000Ω ±10%	

Ordering information						
1 N.O. contact	Type	DRH173524LT	DRH173548LT	DRH173615LT	DRH173730LT	
	Order No.	1219890000	1219910000	1219920000	1219930000	
1 N.C. contact	Type	DRH174012LT	DRH174024LT	DRH174048LT	DRH174110LT	
	Order No.	1219990000	1220010000	1220020000	1220030000	
With test lever locking clip	Type	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW	
	Order No.	7760056249	7760056249	7760056249	7760056249	

DRH DC Relay


DRH DC Relay
2 N.O. contact and 1 N.O./1 N.C. contact
AC / DC coil

- Suitable to switch heavy DC load
- Arc shield
- With LED and test lever
- Approval with CE   TÜV


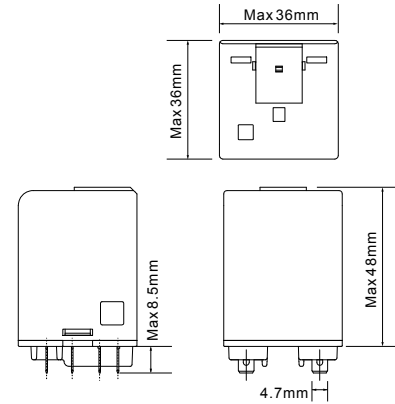


Circuit diagram
PIN top view
Dimensions are in mm

2NO



1NO/1NC



Output

Max. switching voltage	AC: 250 V; DC: 220 V
Continuous current	2NO 16 A @ 250 VAC; 3 A @ 220 VDC; 7A @ 110VDC
	1NO/1NC 16 A @ 250 VAC; 3 A @ 220 VDC; 7A @ 110VDC
Contact material	AgSnO ₂
Min. load voltage / current	12 VDC / 100 mA
Contact resistance (initial)	< 50 mΩ
Electrical endurance	> 10 × 10 ⁴ cycles
Response / dropout delay	< 20 ms / < 20 ms
Max. switching frequency at rated load	1 Hz

Input

Response voltage @ 25°C	AC: ≤ 80% of rated voltage DC: ≤ 75% of rated voltage
Dropout voltage @ 25°C	AC: ≥ 30% of rated voltage DC: ≥ 10% of rated voltage
Max. voltage @ 25°C	110% of rated voltage
Coil power consumption	2.5 VA / 1.5 W





General

Operation temperature	- 40 ... 60°C
Storage temperature	- 40 ... 60°C
Humidity	35 ... 85 %
Electrical strength	Coil-contact 4,000V AC / 1 min Between N.O. contacts 2,500V AC / 1 min Between adjacent contacts 4,000V AC / 1 min
Clearance / creepage distance	1.5 mm / 4 mm
Insulation IEC60664	
Rated voltage	400 V
Pollution category	3
Over voltage category	III

Vibration resistance	10~55Hz dual amplitude: 1.0mm
Shock resistance	10G (half wave of sine pulse: 11ms)
Approval	CE; TÜV; UL
Weight	48 g

Dimension

Length x Width x Height	36 x 36 x 48 mm
-------------------------	-----------------

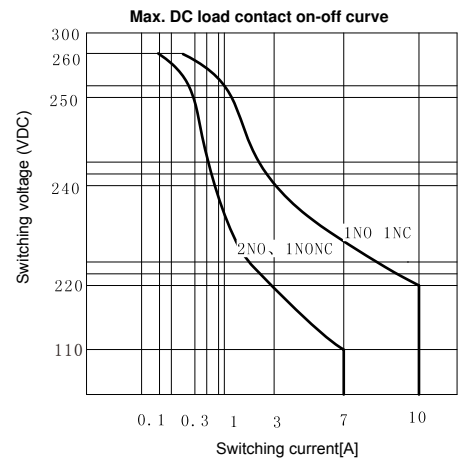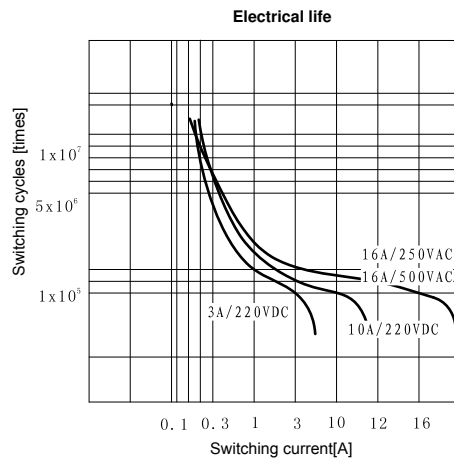

DRH DC Relay

DRH DC Relay
2 N.O. contact and 1 N.C. contact
AC / DC coil

Type code	DRH			
Type DRH				
Type of construction	275 1NO/1NC			
	276 2NO			
Coil voltage	012 12Vdc / 024 24Vdc			
	048 48Vdc / 110 110Vdc			
	220 220Vdc / 524 24Vac			
	548 48Vac / 615 115Vac			
	730 230Vac			
With LED or test lever	LT			

Ordering information	12 V DC	24 V DC	48 V DC	110 V DC	220 V DC
Input					
Rated voltage	12 V DC	24 V DC	48 V DC	110 V DC	220 V DC
DC response / dropout voltage	9 V / 1.2 V	18 V / 2.4 V	36 V / 4.8 V	82.5 V / 11 V	165 V / 22 V
Power consumption	1.5 W	1.5 W	1.5 W	1.5 W	1.5 W
DC rated current	120 mA	60 mA	30 mA	13.03 mA	6.7 mA
Coil resistance	100Ω ±10%	400Ω ±10%	1,600Ω ±10%	8,400Ω ±10%	33,000Ω ±10%

Ordering information					
1 N.O. contact/ Type	DRH275012LT	DRH275024LT	DRH275048LT	DRH275110LT	DRH275220LT
1 N.C. contact Order No.	1220040000	1220050000	1220060000	1220070000	1220080000
2 N.O. contact Type	DRH276012LT	DRH276024LT	DRH276048LT	DRH276110LT	DRH276220LT
Order No.	1220140000	1220150000	1220170000	1220180000	1220190000
With test lever locking clip Type	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW
Order No.	7760056249	7760056249	7760056249	7760056249	7760056249


Ordering information	24 V AC	48 V AC	115 V AC	230 V AC	
Input					
Rated voltage	24 V AC	48 V AC	115 V AC	230 V AC	
DC response / dropout voltage	19.2V / 7.2 V	38.4 V / 14.4 V	92 V / 34.5 V	184 V / 69 V	
Power consumption	2.5 VA	2.5 VA	2.5 VA	2.5 VA	
DC rated current	101.7 mA	51.04 mA	21.2 mA	10.61 mA	
Coil resistance	100Ω ±10%	350Ω ±10%	2,200Ω ±10%	8,000Ω ±10%	

Ordering information					
1 N.O. contact/ Type	DRH275524LT	DRH275548LT	DRH275615LT	DRH275730LT	
1 N.C. contact Order No.	1220090000	1220110000	1220120000	1220130000	
2 N.O. contact Type	DRH276524LT	DRH276548LT	DRH276615LT	DRH276730LT	
Order No.	1220200000	1220210000	1220220000	1220230000	
With test lever locking clip Type	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW	
Order No.	7760056249	7760056249	7760056249	7760056249	

DRW Power Relay



DRW power relay
2CO / 3CO contacts
AC / DC coil

- Suitable to switch high voltage load
- With LED and test lever
- Approval with


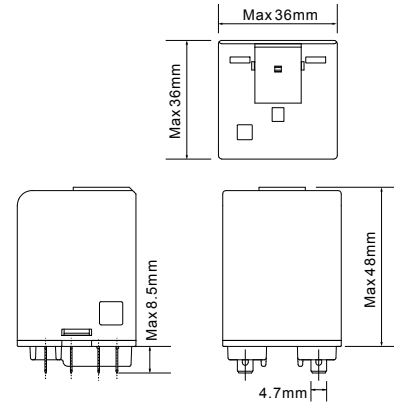


Circuit diagram
PIN top view
Dimensions are in mm

2CO



3CO



Output





Max. switching voltage	400 V AC
Continuous current	16 A@ 400 VAC; 16 A@ 30 VDC
Contact material	AgCdO
Min. load voltage / current	12 VDC / 100 mA
Contact resistance (initial)	< 50 mΩ
Electrical endurance	> 10 × 10 ⁴ cycles
Response / dropout delay	< 20 ms / < 10 ms
Max. switching frequency at rated load	1 Hz

Input

Response voltage @ 25 °C	AC: ≤ 80% of rated voltage DC: ≤ 75% of rated voltage
Dropout voltage @ 25 °C	AC: ≥ 30% of rated voltage DC: ≥ 10% of rated voltage
Max. voltage @ 25 °C	110% of rated voltage
Coil power consumption	2.5 VA / 1.5 W

General

Operation temperature	2CO: - 40 ... 60°C; 3CO: - 40 ... 50 °C;
Storage temperature	- 40 ... 60°C
Humidity	35 ... 85 %
Electrical strength	Coil-contact: 4,000V AC / 1 min Between N.O. contacts: 2,500V AC / 1 min Between adjacent contacts: 4,000V AC / 1 min
Clearance / creepage distance	3.5 mm / 6 mm
Insulation IEC60664	Rated voltage: 400 V Pollution category: 3 Over voltage category: III
Vibration resistance	10-55Hz dual amplitude: 1.0mm
Shock resistance	10G (half wave of sine pulse: 11ms)
Approval	CE; TÜV; UL
Weight	51 g
Dimension	Length x Width x Height: 36 x 36 x 48 mm

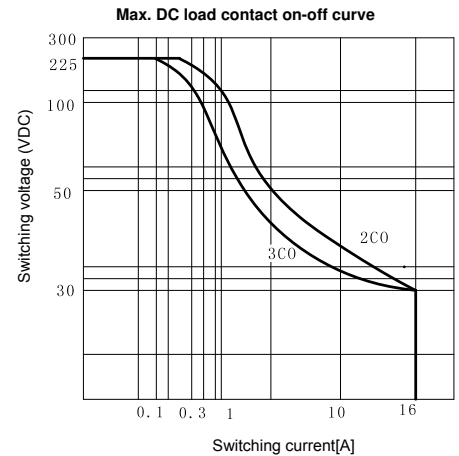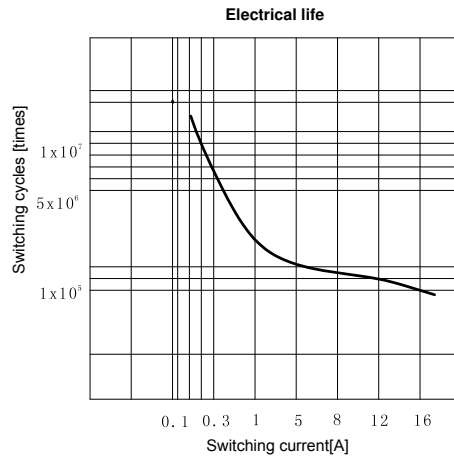

DRW Power Relay

DRW power relay
2CO / 3CO contacts
AC / DC coil

Type code	DRW			
Type DRW				
Type of construction	270 2CO			
	174 1NC			
Coil voltage	012 12Vdc / 024 24Vdc			
	048 48Vdc / 110 110Vdc			
	220 220Vdc / 524 24Vac			
	548 48Vac / 615 115Vac			
	730 230Vac / 900 400Vac			
With LED or test lever	LT			

Ordering information	12 V DC	24 V DC	48 V DC	110 V DC	220 V DC
Input					
Rated voltage	12 V DC	24 V DC	48 V DC	110 V DC	220 V DC
DC response / dropout voltage	9 V / 1.2 V	8 V / 2.4 V	36 V / 4.8 V	82.5 V / 11 V	115 V / 22 V
Power consumption	1.5 W	1.5 W	1.5 W	1.5 W	1.5 W
DC rated current	120 mA	60 mA	30 mA	13.03 mA	6.7 mA
Coil resistance	100Ω ±10%	400Ω ±10%	1,600Ω ±10%	8,400Ω ±10%	33,000Ω ±10%

Ordering information						
2CO contact	Type	DRW270012LT	DRW270024LT	DRW270048LT	DRW270110LT	DRW270220LT
	Order No.	1219730000	1219740000	1219750000	1219760000	1219770000
3CO contact	Type	DRW370012LT	DRW370024LT	DRW370048LT	DRW370110LT	DRW370220LT
	Order No.	1219780000	1219790000	1219810000	1219820000	1219830000
With test lever locking clip	Type	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW
	Order No.	7760056249	7760056249	7760056249	7760056249	7760056249


Ordering information	24V AC	48V AC	115V AC	230V AC	400V AC
Input					
Rated voltage	24 V AC	48 V AC	115 V AC	230 V AC	400 V AC
AC response / dropout voltage	19.2V / 7.2 V	38.4 V / 14.4 V	92 V / 34.5 V	184 V / 69 V	320 V / 120 V
Power consumption	2.5 VA	2.5 VA	2.5 VA	2.5 VA	2.5 VA
AC rated current	101.7 mA	51.04 mA	21.2 mA	10.61 mA	6.1 mA
Coil resistance	100Ω ±10%	350Ω ±10%	2,200Ω ±10%	8,000Ω ±10%	30,000Ω ±10%

Ordering information						
2CO contact	Type	DRW270524LT	DRW270548LT	DRW270615LT	DRW2701730LT	DRW270900LT
	Order No.	1219350000	1219360000	1219370000	1219380000	1219390000
3CO contact	Type	DRW370524LT	DRW370548LT	DRW370615LT	DRW370730LT	DRW370900LT
	Order No.	1219410000	1219420000	1219430000	1219440000	1219450000
With test lever locking clip	Type	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW	Test lever block for DRH/DRW
	Order No.	7760056249	7760056249	7760056249	7760056249	7760056249


PWR High Power Relay

PWR high power relay
 1 N.O. contact
 AC / DC coil

- Max. load current: 30 A
- Various mounting methods available
- Approval with CE TÜV

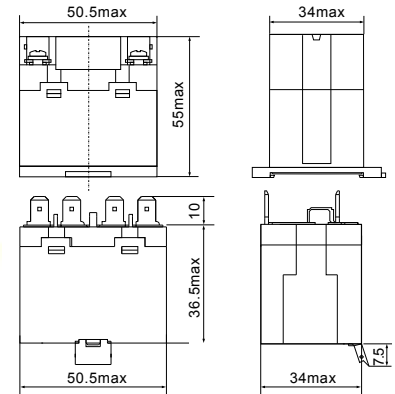

Circuit diagram
 PIN top view
 Dimensions are in mm




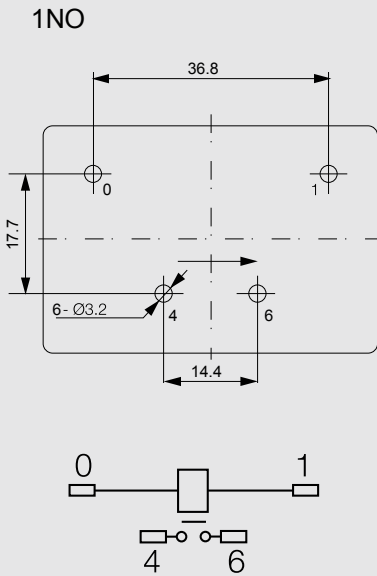


Output	
Max. switching voltage	277 V AC
Continuous current	30 A
Contact material	Ag alloy
Min. load voltage / current	12 VDC / 100 mA
Contact resistance (initial)	< 50 mΩ
Electrical endurance	> 10 × 10 ⁴ cycles
Response / dropout delay	< 20 ms / < 10 ms

Input	
Response voltage @ 25°C	AC: ≤ 75% of rated voltage DC: ≤ 75% of rated voltage
Dropout voltage @ 25°C	AC: ≥ 15% of rated voltage DC: ≥ 15% of rated voltage
Max. voltage @ 25°C	110% of rated voltage
Coil power consumption	2.5 VA / 1.9 W

General	
Operation temperature	- 25 ... 55°C
Storage temperature	- 25 ... 55°C
Humidity	35 ... 85 %
Electrical strength	Coil-contact: 2,000V AC / 1 min Between N.O. contacts: 2,000V AC / 1 min Between adjacent contacts: 4,000V AC / 1 min
Clearance / creepage distance	3.5 mm / 6 mm
Insulation IEC60664	Rated voltage: 250 V Pollution category: 3 Over voltage category: III

Vibration resistance	10-55Hz dual amplitude: 1.0mm
Shock resistance	10G (half wave of sine pulse: 11ms)
Approval	CE; TÜV
Weight	Push-in connection/PCB welding: 90g; DIN-rail mounting: 120g
Dimension	
Length x Width x Height	34 x 50.5 x 36.5 mm

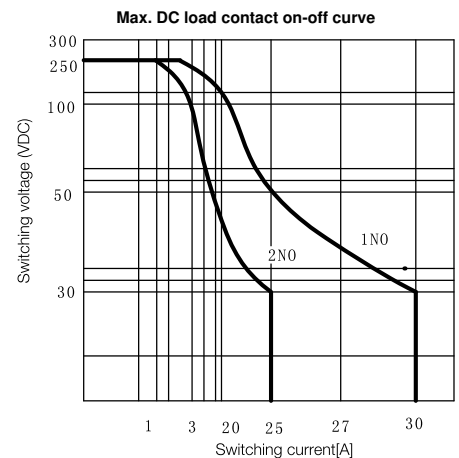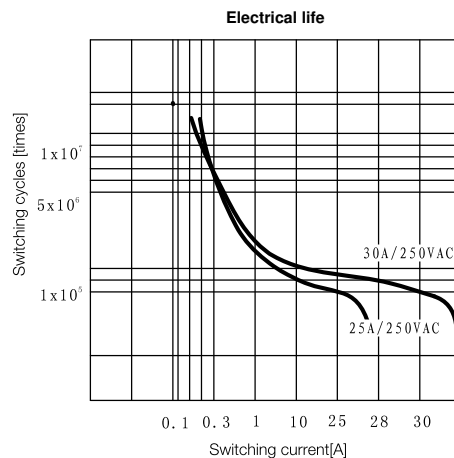

PWR High Power Relay

PWR high power relay
1 N.O. contact
AC / DC coil

Type code	PWR			
Type PWR	Type of construction and mounting 153 1N.O. contact, push-in connection 173 1N.O. contact, DIN-rail mounting			
Coil voltage	006 6Vdc / 012 12Vdc 024 24Vdc / 048 48Vdc 110 110Vdc / 220 220Vdc 524 24Vac / 548 48Vac 615 115Vac / 730 230Vac 880 380Vac			
L	with LED			
T	with test lever			
P	PCB welding			

Ordering information	6 V DC 1NO	12 V DC 1NO	24 V DC 1NO	48 V DC 1NO	110 V DC 1NO	220 V DC 1NO
Input						
Rated voltage	6 V DC	12 V DC	24 V DC	48 V DC	110 V DC	220 V DC
DC response / dropout voltage	4.5 V / 0.9 V	9 V / 1.8 V	18 V / 3.6 V	36 V / 7.2 V	82.5 V / 16.5 V	165 V / 33 V
Power consumption	1.9 W	1.9 W	1.9 W	1.9 W	1.9 W	1.9 W
DC rated current	317 mA	160 mA	79.2 mA	39.3 mA	17.3 mA	8.6 mA
Coil resistance	18.9Ω ±10%	75Ω ±10%	303Ω ±10%	1,220Ω ±10%	6,360Ω ±10%	25,474Ω ±10%

Ordering information							
plug-in , need socket	Type	PWR153006LT	PWR153012LT	PWR153024LT	PWR153048LT	PWR153110LT	PWR153220LT
	Order No.	1219590000	1219610000	1219620000	1219630000	1219640000	1219650000
Din rail installation,no need socket	Type	PWR173006L	PWR173012L	PWR173024L	PWR173048L	PWR173110L	PWR173220L
	Order No.	1219460000	1219470000	1219480000	1219490000	1219510000	1219520000
PCB soldering	Type	PWR153006P	PWR153012P	PWR153024P	PWR153048P	PWR153110P	PWR153220P
	Order No.	1233010000	1233020000	1233030000	1233040000	1233050000	1233060000


Ordering information	24 V AC 1NO	48 V AC 1NO	115 V AC 1NO	230 V AC 1NO	380 V AC 1NO	
Input						
Rated voltage	24 V AC	48 V AC	115 V AC	230 V AC	115 V AC	
AC response / dropout voltage	18V / 3.6 V	36 V / 7.2 V	86.3 V / 17.3 V	172.5 V / 34.5 V	285 V / 57 V	
Power consumption	2.5 VA	2.5 VA	2.5 VA	2.5 VA	2.5 VA	
AC rated current	87.3 mA	43.6 mA	22.1 mA	11.0 mA	6.1 mA	
Coil resistance	275Ω ±10%	1,100Ω ±10%	5,200Ω ±10%	21,000Ω ±10%	62,650Ω ±10%	

Ordering information							
Din-rail mounting without socket	Type	PWR153524LT	PWR153548LT	PWR153615LT	PWR153730LT	PWR153880LT	
	Order No.	1219230000	1219240000	1219250000	1219260000	1219270000	
Push-in connection with socket	Type	PWR173524L	PWR173548L	PWR173615L	PWR173730L	PWR173880L	
	Order No.	1219090000	1219120000	1219130000	1219140000	1219150000	
PCB welding	Type	PWR153524P	PWR153548P	PWR153615P	PWR153730P	PWR153880P	
	Order No.	1232860000	1232870000	1232880000	1232890000	1232900000	

PWR High Power Relay


PWR high power relay
2 N.O. contact
AC / DC coil

- Max. load current: 25 A
- Various mounting methods available
- Approval with CE TÜV

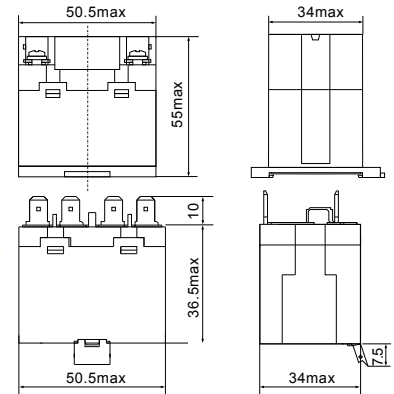

Circuit diagram
PIN top view
Dimensions are in mm

2NO

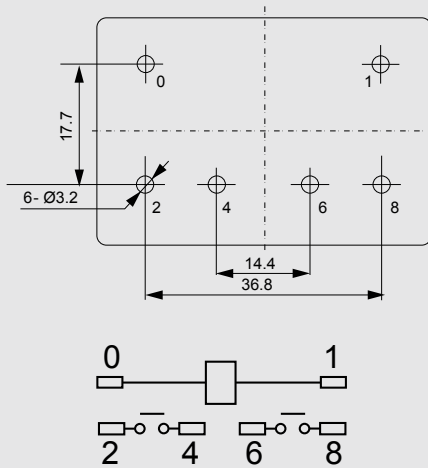

Output





Max. switching voltage	277 V AC
Continuous current	25 A
Contact material	Ag alloy
Min. load voltage / current	12 VDC / 100 mA
Contact resistance (initial)	< 50 mΩ
Electrical endurance	> 10 × 10 ⁴ cycles
Response / dropout delay	< 30 ms / < 30 ms

Input

Response voltage @ 25°C	AC: ≤ 75% of rated voltage DC: ≤ 75% of rated voltage
Dropout voltage @ 25°C	AC: ≥ 15% of rated voltage DC: ≥ 15% of rated voltage
Max. voltage @ 25°C	110% of rated voltage
Coil power consumption	2.5 VA / 1.9 W

General

Operation temperature	- 25 ... 55°C
Storage temperature	- 25 ... 55°C
Humidity	35 ... 85 %
Electrical strength	Coil-contact: 2,000V AC / 1 min Between N.O. contacts: 2,000V AC / 1 min Between adjacent contacts: 4,000V AC / 1 min
Clearance / creepage distance	1.5 mm / 4 mm
Insulation IEC60664	
Rated voltage	250 V
Pollution category	3
Over voltage category	III
Vibration resistance	10-55Hz dual amplitude: 1.0mm
Shock resistance	10G (half wave of sine pulse: 11ms)
Approval	CE; TÜV
Weight	Push-in connection/PCB welding: 90g; DIN-rail mounting: 120g
Dimension	
Length x Width x Height	34 x 50.5 x 36.5 mm

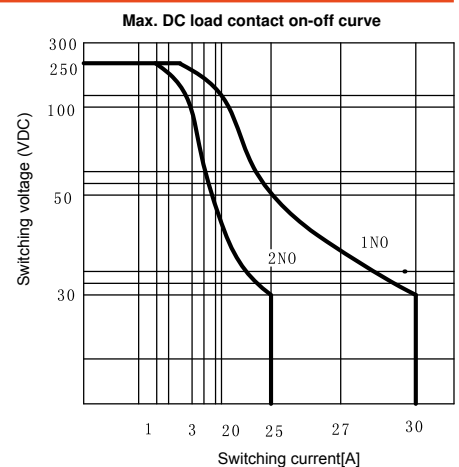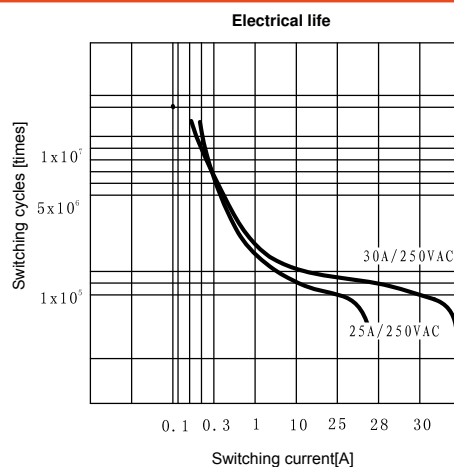

PWR High Power Relay

PWR high power relay
2 N.O. contact
AC / DC coil

Type code	PWR			
Type PWR				
Type of construction and mounting	256 2N.O. contact, push-in connection 276 2N.O. contact, DIN-rail mounting			
Coil voltage	006 6Vdc / 012 12Vdc 024 24Vdc / 048 48Vdc 110 110Vdc / 220 220Vdc 524 24Vac / 548 48Vac 615 115Vac / 730 230Vac 880 380Vac			
L	with LED			
T	with test lever			
P	PCB welding			

Ordering information	6 V DC 2NO	12 V DC 2NO	24 V DC 2NO	48 V DC 2NO	110 V DC 2NO	220 V DC 2NO
Input						
Rated voltage	6 V DC	12 V DC	24 V DC	48 V DC	110 V DC	220 V DC
DC response / dropout voltage	4.5 V / 0.9 V	9 V / 1.8 V	18 V / 3.6 V	36 V / 7.2 V	82.5 V / 16.5 V	165 V / 33 V
Power consumption	1.9 W	1.9 W	1.9 W	1.9 W	1.9 W	1.9 W
DC rated current	317 mA	160 mA	79.2 mA	39.3 mA	17.3 mA	8.6 mA
Coil resistance	18.9Ω ±10%	75Ω ±10%	303Ω ±10%	1,220Ω ±10%	6,360Ω ±10%	25,474Ω ±10%

Ordering information							
plug-in , need socket	Type	PWR256006LT	PWR256012LT	PWR256024LT	PWR256048LT	PWR256110LT	PWR256220LT
	Order No.	1219660000	1219670000	1219680000	1219690000	1219710000	1219720000
Din rail installation,no need socket	Type	PWR276006L	PWR276012L	PWR276024L	PWR276048L	PWR276110L	PWR276220L
	Order No.	1219530000	1219540000	1219550000	1219560000	1219570000	1219580000
PCB soldering	Type	PWR256006P	PWR256012P	PWR256024P	PWR256048P	PWR256110P	PWR256220P
	Order No.	1233070000	1233080000	1233090000	1233110000	1233120000	1233130000

Ordering information	24 V AC 2NO	48 V AC 2NO	115 V AC 2NO	230 V AC 2NO	380 V AC 2NO	
Input						
Rated voltage	24 V AC	48 V AC	115 V AC	230 V AC	115 V AC	
AC response / dropout voltage	18V / 3.6 V	36 V / 7.2 V	86.3 V / 17.3 V	172.5 V / 34.5 V	285 V / 57 V	
Power consumption	2.5 VA	2.5 VA	2.5 VA	2.5 VA	2.5 VA	
AC rated current	87.3 mA	43.6 mA	22.1 mA	11.0 mA	6.1 mA	
Coil resistance	275Ω ±10%	1,100Ω ±10%	5,200Ω ±10%	21,000Ω ±10%	62,650Ω ±10%	

Ordering information							
plug-in , need socket	Type	PWR256524LT	PWR256548LT	PWR256615LT	PWR256730LT	PWR256880LT	
	Order No.	1219280000	1219290000	1219320000	1219330000	1219340000	
Din rail installation,no need socket	Type	PWR276524L	PWR276548L	PWR276615L	PWR276730L	PWR276880L	
	Order No.	1219160000	1219170000	1219180000	1219190000	1219220000	
PCB soldering	Type	PWR256524P	PWR256548P	PWR256615P	PWR256730P	PWR256880P	
	Order No.	1232910000	1232920000	1232930000	1232940000	1232990000	

Relay Socket

Separated socket (for RCL relay)



Ordering information

Technical data		
Rated current	1CO/2CO	1 x 12A / 2 x 12A
Rated voltage		300 Vac
Coil/contact electrical strength		>4000 V _{rms}
Insulation (VDE 0110b)		C / 250 Vac
Ambient temperature		-40...+70°C
Protection level		IP 20
Electric shock prevention category		VBG 4
Wire cross section / with terminal		2 x 2.5 mm ² / 2 x 1.5 mm ²
Wiring torque / max.		0.5Nm / 0.8Nm
Packing unit		10 pcs.

Sockets connected by screws, DIN-rail mounting

Description	Type	Order No.
3.5mm pitch, DIN-rail mounting	SRC ECO 1CO*	7760056005
5mm pitch screw connected sockets, DIN-rail mounting	SRC ECO 2CO*	7760056006
Accessories		
Mark, for SRC ECO relay sockets	Mark SRC ECO	7760056178

* SRC ECO sockets already have plastic release clip and mark

Separated socket (for RCM and DRM relays)



Ordering information

Technical data		
Rated current		4 x 6 A, 3 x 10 A, 2 x 12 A
Rated voltage		300 Vac
Coil/contact electrical strength		>4000 V _{rms}
Insulation (VDE 0110b)		C / 250 Vac
Ambient temperature		-40...+70°C
Protection level		IP 20
Electric shock prevention category		VBG 4
Wire cross section / with terminal		2 x 2.5 mm ² / 2 x 1.5 mm ²
Wiring torque / max.		0.5 Nm / 0.8 Nm
Packing unit		10 pcs.

Sockets connected by screws, DIN-rail mounting

Description	Type	Order No.
Sockets connected by screws, DIN-rail mounting, 2CO	SCM 2CO	8690880000
	SCM ECO 2CO*	7760056007
Sockets connected by screws, DIN-rail mounting, 3CO	SCM 3CO	8690890000
Sockets connected by screws, DIN-rail mounting, 4CO	SCM 4CO	8690900000
	SCM ECO 4CO*	7760056008

* SRC ECO sockets already have plastic release clip and mark

Relay clips (plastic and metal)

Ordering information


For SCM 2CO, SCM 3CO and SCM 4CO

Description	Type	Order No.
Plastic clip for RCM of 29 mm	SCM CLIP P	8691110000
Metal clip for RCM of 29 mm	SCM CLIP M	7760056039
Accessories		
Mark, for SRC ECO relay sockets	Mark SCM ECO	7760056179


Circuit diagram

PIN top view

Dimensions are in mm

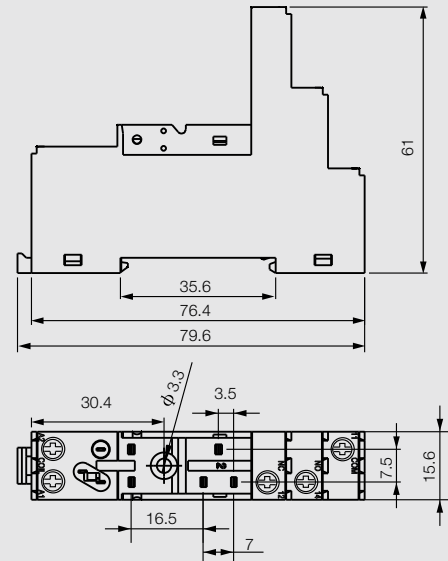


Dimensions are in mm

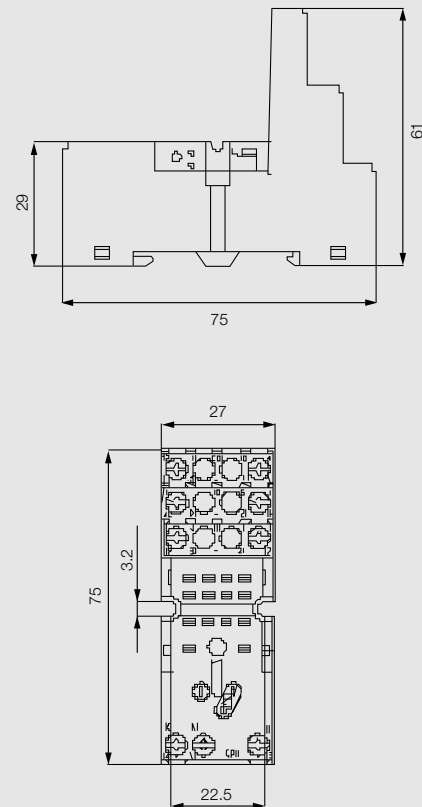


Relay Socket

Hybrid socket (for RCM and DRM relay)

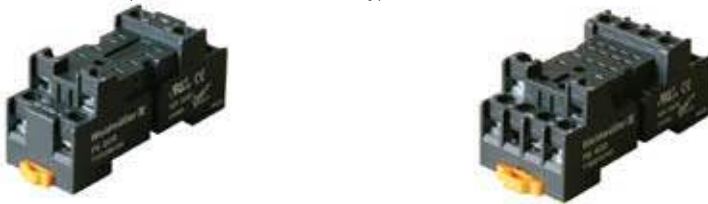

Dimensions are in mm

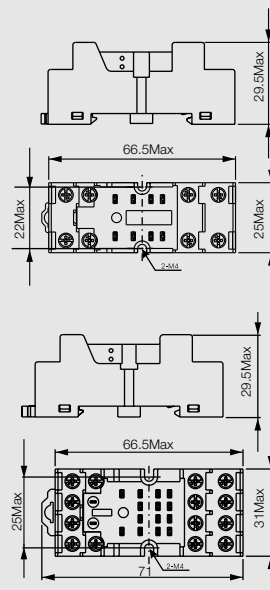

Ordering information


Technical data				
Rated current	2CO/4CO	12A/10A		
Rated voltage		300Vac		
Dielectric withstand voltage / coil-contacts		2500Vrms		
Dielectric withstand voltage / between contacts		2500Vrms		
Wiring torque / max.		0.5Nm/0.8Nm		
Wire		0.5-2.5 mm ²		
Environments		-40°C...+70°C		
Weight	2CO/4CO	35g/43g		
Min. in package		20pcs		
Description		Type	Qty.	Order No.
DIN-Rail mounting sockets	2CO	FS 2CO*	10	7760056106
DIN-Rail mounting sockets	4CO	FS 4CO	10	7760056107
Accessories				
Mark, for SRC ECO relay sockets		Mark FS		7760056180

Note: FS sockets already have marks.

Economic socket (for RCM and DRM relay)



Dimensions are in mm

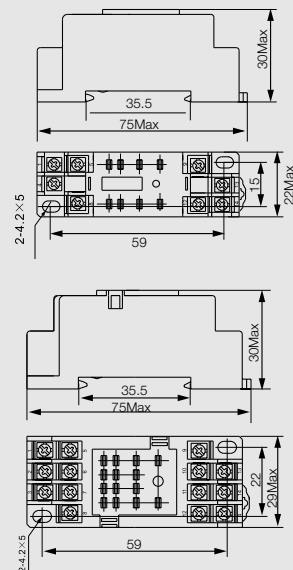

Ordering information

Technical data				
Rated current	2CO/4CO	10A/5A		
Rated voltage		300V		
Dielectric withstand voltage / coil-contacts		2000V		
Dielectric withstand voltage / between contacts		2000V		
Wiring torque / max.		0.5Nm/0.8Nm		
Wire		0.5-2.5mm ²		
Environments		-40°C...+70°C		
Weight	2CO/4CO	43g/56g		
Min. in package		20pcs		
Description		Type	Qty.	Order No.
DIN-Rail mounting sockets	2CO	FS 2CO ECO	10	7760056126
DIN-Rail mounting sockets	4CO	FS 4CO ECO	10	7760056127
DIN-Rail mounting sockets with finger protection	2CO	FS 2CO F ECO	10	1190740000
DIN-Rail mounting sockets with finger protection	4CO	FS 4CO F ECO	10	1190750000

Note: functional module is not suitable for this type of sockets

Metal clip (recommended for vibration occasion)

Type	Order No.
DRM clip M (for DRM relay)	7760056108
Metal clip set (for DRM relay, only with FS ECO sockets)	7760056128



DRM clip M

Metal clip set

Functional modules

Technical data	Type	Order No.
Suppressor diode 6...230Vdc	RIM 1 6/230VDC	7760056169
RC-combined protection 110...230 Vac	RIM 3 110/230VAC	7760056014
RC-combined protection 110...230Vac with LED *	RIM 3 110/230VAC LED	7760056045
Green LED 6...24 Vdc with suppressor diode	RIM 2 6/24VDC	7760056015
Green LED 24...60 Vdc with suppressor diode	RIM 2 24/60VDC	7760056016
Green LED 110...230 Vdc with suppressor diode	RIM 2 110/230VDC	7760056017
Green LED 6...24 Vdc / Vac	RIM 3 6/24VUC	7940018457
Green LED 24...60 Vdc / Vac	RIM 3 24/60VUC	7760056018
Green LED 110...230 Vdc / Vac	RIM 3 110/230VUC	7940018455

* For SCM/SRC sockets only, not for FS sockets.



Relay Socket

DRL relay socket SLD



Ordering information

Technical data	
Rated voltage	300 V
Rated current	10 A
Coil/contact electrical strength	2,000 V
Electrical strength between contacts	2,500 V
Operation temperature	-40 ... 85°C
Pollution class	2
Over voltage class	III
Wiring torque	1.0 Nm
Wire cross section	0.5 ... 2.5 mm ²
Protection level (IEC 61810)	IP10
Weight	2CO: 50 g ; 3CO: 60 g ; 4CO: 76 g
Approvals	CE
Description	Type Qty. Order No.
DIN-rail mounted socket, 2CO	SLD 2CO 10 1132830000
DIN-rail mounted socket, 3CO	SLD 3CO 10 1132840000
DIN-rail mounted socket, 4CO	SLD 4CO 10 1132850000
Metal clips (pair)	SLD Clip M 10 7760056242

DRL relay socket SLD



Ordering information

Technical data	
Rated voltage	300 V
Rated current	10 A
Coil/contact electrical strength	2,000 V
Electrical strength between contacts	2,500 V
Operation temperature	-40 ... 85°C
Pollution class	2
Over voltage class	III
Wiring torque	1.0 Nm
Wire cross section	0.5 ... 2.5 mm ²
Protection level (IEC 61810)	IP20
Approvals	CE
Description	Type Order No.
DIN-rail mounted socket, 2CO	SLD F 2CO 10 7760056225
DIN-rail mounted socket, 3CO	SLD F 3CO 10 7760056226
DIN-rail mounted socket, 4CO	SLD F 4CO 10 7760056227

Ordering information


Technical data	Type	Order No.
Metal clips SLD F 2CO	Metal clip	7760056108
Metal clips SLD F 3CO	SLD clip 3CO	7760056234
Metal clips SLD F 4CO	SLD clip 4CO	7760056235

Ordering information


Technical data	Type	Order No.
Suppressing diode 6...230Vdc, for SLD F 2CO/3CO	RIM 1 6/230Vdc	7760056169
Blocking modular 110...230 Vac, for SLD F 2CO/3CO	RIM 3 110/230Vac	7760056014
Blocking modular 6 ... 230 Vac, for SLD F 4CO	RIM 5 6/230Vac	1174670000
Suppressing diode 6...230 Vdc, for SLD F 4CO	RIM 5 6/230Vdc	1174650000

Dimensions are in mm


SLD 2CO




SLD 3CO




SLD 4CO




SLD F 2CO



SLD F 3CO



SLD F 4CO



Relay Socket

DRR/RRD relay sockets



Ordering information

Technical data			
Rated voltage	300 V		
Rated current	12 A		
Coil/contact electrical strength	4,000 V		
Electrical strength between contacts	2,500 V		
Operating temperature	-40 ... 85°C		
Pollution class	2		
Over voltage class	III		
Wiring torque	1.0 Nm		
Wire cross section	0.5 ... 2.5 mm ²		
Protection level (IEC 61810)	IP20		
Weight	50 g		
Approvals	CE		
Description	Type	Qty.	Order No.
DIN-rail mounting rockets, 8-pin	SRD ECO 2CO	10	1132810000
DIN-rail mounting rockets, 11-pin	SRD ECO 3CO	10	1132820000

Metal clip

Description	Type	Order No.
Metal clip for DRR relay sockets	DRR SOCKET METAL CLIP	1134160000
Metal clip for RRD relay sockets	SRD-I CLIP M	8869370000




Functional modules


Technical data	Type	Order No.
RC combined protection 6 ... 230 Vac	RIM 5 6/230Vac	1174670000
Protective diode 6 ... 230 Vdc	RIM 5 6/230Vdc	1174650000

Dimensions are in mm

SRD ECO 2CO

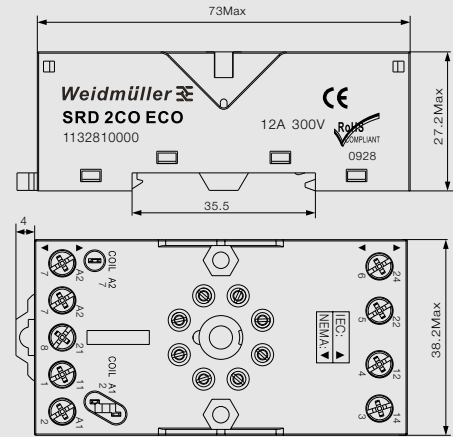

SRD ECO 3CO

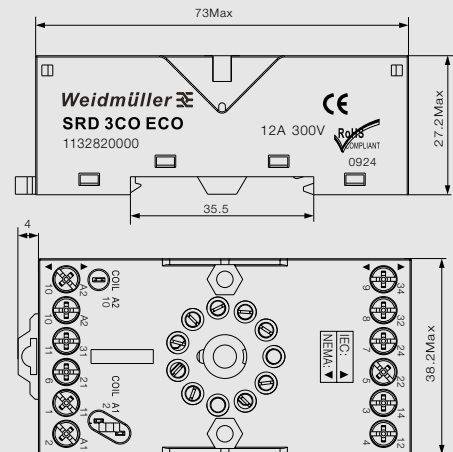

Relay Socket

PWR relay socket



Product performance

Technical data	
Rated current	30 A
Rated voltage	400 V AC
Medium withstand voltage	2500 V/S
Screw torque	1.0Nm
External wire	20-10/0.5-5.5AWG/mm ²
Environments	-40~+85°C
Weight	56g

Assembled relays and accessories

Technical data		
Product type	Relay type	Order No.
PWR relay socket	SWR	1220240000


DRH and DRW relay socket




Ordering information

Technical data			
Rated voltage	400 V AC		
Rated current	16 A		
Coil/contact electrical strength	4,000 V		
Electrical strength between contacts	4,000 V		
Operation temperature	-40 ... 60°C		
Pollution class	2		
Over voltage class	II		
Wiring torque/max.	1.2 Nm		
Wire cross section	0.5 ... 4 mm ²		
Protection level (IEC 61810)	IP20		
Weight	64g		
Approvals	CE, UL		
Description	Type	Qty.	Order No.
Relay socket, for DRH and DRW relays	SPW ECO 3CO	10	1220250000
Metal clip	Metal clip DRH/DRW	10	1220260000

Shape





Mounting

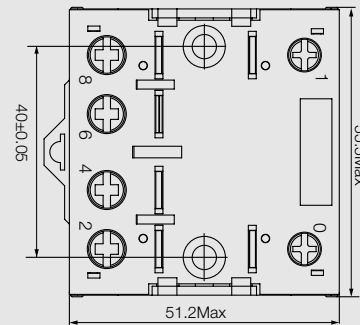

Dimensions are in mm

SPW ECO 3CO

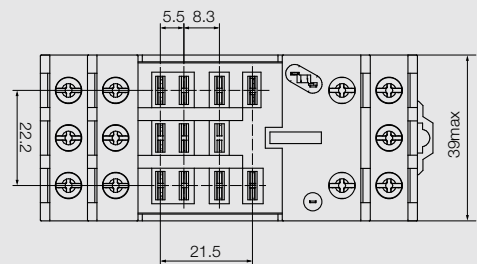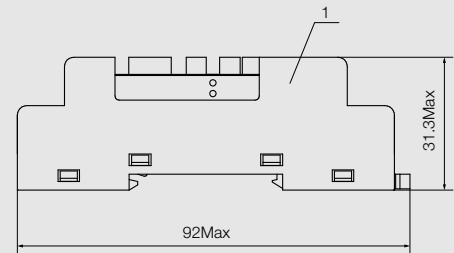

Relay Socket

RCL sockets with PCB pins



Ordering information

Technical data	
Rated current	1CO
	2CO
Rated voltage	
Ambient temperature	
Approvals	
Description	
Sockets with PCB pins, pitch: 3.5 mm	
Sockets with PCB pins, pitch: 5 mm	

12 A		
2 x 12 A		
300 V AC		
- 40 °C ... +80 °C		
RAL		
Type	Qty.	Order No.
SRC 05 PCB	20	7760056110
SRC 08 PCB	20	7760056111

Note: SRC 05 PCB and SRC 08 PCB already contain metal clip

RCM/DRM sockets with PCB pins



Ordering information

Technical data	
Rated current	
Rated voltage	
Ambient temperature	
Approvals	
Description	
Sockets with PCB pins, 2CO	
Sockets with PCB pins, 3CO	
Sockets with PCB pins, 4CO	
Metal clip DRM PCB	

10 A		
250 V AC		
- 40 °C ... +80 °C		
RAL		
Type	Qty.	Order No.
SCM 08 PCB	10	7760056112
SCM 11 PCB	10	1132790000
SCM 14 PCB	10	7760056113
metal clip DRM PCB		1209690000

RRC sockets with PCB pins



Ordering information

Technical data	
Rated current	
Rated voltage	
Ambient temperature	
Description	
Sockets with PCB pins, 8-pin	
Sockets with PCB pins, 11-pin	

10 A		
250 V AC		
- 40 °C ... +70 °C		
Type	Qty.	Order No.
SRD 2CO PCB	25	8697750000
SRD 3CO PCB	25	8697730000

DRH/DRW sockets with PCB pins




Ordering information




Technical data	
Rated current	
Rated voltage	
Ambient temperature	
Description	
Sockets with PCB pins, 11-pin	
Metal clip SPW PCB	

16 A		
400 V AC		
- 40 °C ... +70 °C		
Type	Qty.	Order No.
SPW PCB	10	1132800000
SPW METAL CLIP		1238770000


SRC 05 PCB




SRC 08 PCB




SCM 14 PCB

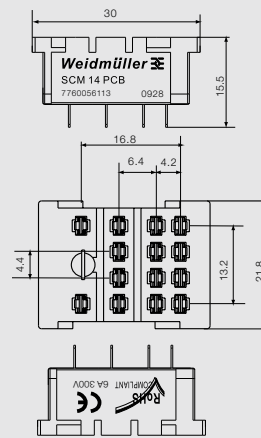

SRD 8-pin



SRD 11-pin



SPW PCB

