

Data sheet

16117.2 WE-SUNBLIND



Webeasy I/O blinds control module, 4 digital inputs, 2 relay outputs, If the bus connection fails, the outputs switch to preset, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VAC/DC

Business data

Article number	16117.2
Article name	WE-SUNBLIND
GTIN (EAN)	4044211207601
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	150 g
Weight per piece (including packaging)	190 g
Unit of weight	G
Customs number	85423190
Country of origin	NL
Product description	Controller module

Technical data

BUS data

Bus-Topologie / Kabellänge max.	multidrop line / 500m
Datenübertragungsrate / Bus-Teilnehmer max.	19k2 bps / 64
Bus protocol / interface	Modbus RTU / RS485, halb duplex, nicht isoliert

Dimensions

Length	95 mm
Width	71 mm
Height	60 mm

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	6 mm
Torque	0.4 Nm


Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-01-17
REACH Candidate Substance Note	No
RoHS Conform	yes

Data sheet

16117.2 WE-SUNBLIND

Media

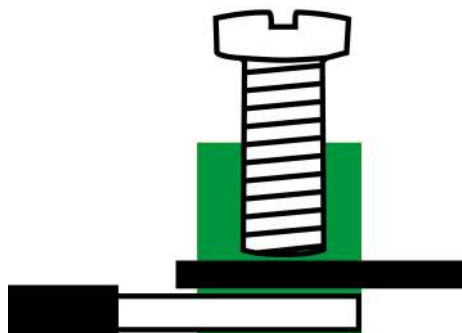

di1	di2	0V	L1	⊕	N		
		230V IN					
		WIELAND GST18/ SCREW (-ST)					
A1	INTERNAL BUS	WE-SUNBLIND (-ST)				A1	↔
A2						A2	↔
A						A	↔
B						B	↔
		WIELAND GST18/ SCREW (-ST)					
		230V OUTPUT					
1	⊕	N	2				

Accessories
