



Main Product Characteristics

$V_{(BR)DSS}$	-60V
$R_{DS(ON)}$	105mΩ
I_D	-10A

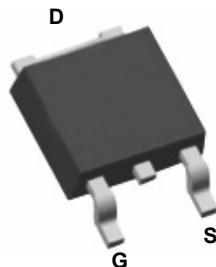

TO-252 (DPAK)

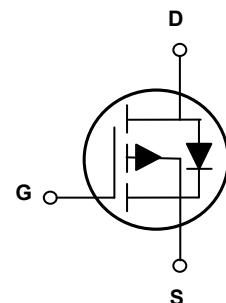

Schematic Diagram

Features and Benefits

- Advanced MOSFET process technology
- Ideal for high efficiency switched mode power supplies
- Low on-resistance with low gate charge
- Fast switching and reverse body recovery



Description

The SSFD6909 utilizes the latest techniques to achieve high cell density and low on-resistance. These features make this device extremely efficient and reliable for use in high efficiency switch mode power supply and a wide variety of other applications.

Absolute Maximum Ratings ($T_C=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	-60	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current – Continuous ($T_C=25^\circ\text{C}$)	I_D	-10	A
Drain Current – Continuous ($T_C=100^\circ\text{C}$)		-6.3	A
Drain Current – Pulsed ¹	I_{DM}	-40	A
Single Pulse Avalanche Energy ²	E_{AS}	25	mJ
Single Pulse Avalanche Current ²	I_{AS}	-18	A
Power Dissipation ($T_C=25^\circ\text{C}$)	P_D	32	W
Power Dissipation – Derate above 25°C		0.25	W/°C
Storage Temperature Range	T_{STG}	-50 to +150	°C
Operating Junction Temperature Range	T_J	-50 to +150	°C

Thermal Characteristics

Parameter	Symbol	Typ.	Max.	Unit
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	---	62	°C/W
Thermal Resistance Junction to Case	$R_{\theta JC}$	---	3.84	°C/W

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=-250\mu\text{A}$	-60	---	---	V
$\Delta \text{BV}_{\text{DSS}}$ Temperature Coefficient	$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	Reference to 25°C , $I_{\text{D}}=-1\text{mA}$	---	-0.05	---	$\text{V}/^\circ\text{C}$
Drain-Source Leakage Current	$I_{\text{DS}(\text{SS})}$	$V_{\text{DS}}=-60\text{V}, V_{\text{GS}}=0\text{V}, T_J=25^\circ\text{C}$	---	---	-1	μA
		$V_{\text{DS}}=-48\text{V}, V_{\text{GS}}=0\text{V}, T_J=125^\circ\text{C}$	---	---	-10	μA
Gate-Source Leakage Current	I_{GSS}	$V_{\text{GS}}=\pm 20\text{V}, V_{\text{DS}}=0\text{V}$	---	---	± 100	nA
On Characteristics						
Static Drain-Source On-Resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}}=-10\text{V}, I_{\text{D}}=-6\text{A}$	---	87	105	$\text{m}\Omega$
		$V_{\text{GS}}=-4.5\text{V}, I_{\text{D}}=-3\text{A}$	---	120	145	$\text{m}\Omega$
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}}=V_{\text{DS}}, I_{\text{D}}=-250\mu\text{A}$	-1	-1.6	-2.5	V
$V_{\text{GS}(\text{th})}$ Temperature Coefficient	$\Delta V_{\text{GS}(\text{th})}$		---	3	---	$\text{mV}/^\circ\text{C}$
Forward Transconductance	g_{fs}	$V_{\text{DS}}=-10\text{V}, I_{\text{D}}=-6\text{A}$	---	5.5	---	S
Dynamic and Switching Characteristics						
Total Gate Charge ^{3, 4}	Q_g	$V_{\text{DS}}=-30\text{V}, V_{\text{GS}}=-10\text{V}, I_{\text{D}}=-4\text{A}$	---	10	15	nC
Gate-Source Charge ^{3, 4}	Q_{gs}		---	1.6	3.2	
Gate-Drain Charge ^{3, 4}	Q_{gd}		---	3	6	
Turn-On Delay Time ^{3, 4}	$T_{\text{d}(\text{on})}$	$V_{\text{DD}}=-30\text{V}, V_{\text{GS}}=-10\text{V}, R_{\text{G}}=6\Omega, I_{\text{D}}=-1\text{A}$	---	8	16	nS
Rise Time ^{3, 4}	T_r		---	15.4	30	
Turn-Off Delay Time ^{3, 4}	$T_{\text{d}(\text{off})}$		---	42.8	80	
Fall Time ^{3, 4}	T_f		---	8.4	16	
Input Capacitance	C_{iss}	$V_{\text{DS}}=-30\text{V}, V_{\text{GS}}=0\text{V}, F=1\text{MHz}$	---	785	1300	pF
Output Capacitance	C_{oss}		---	175	300	
Reverse Transfer Capacitance	C_{rss}		---	112	220	
Gate Resistance	R_g	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=0\text{V}, F=1\text{MHz}$	---	36	---	Ω
Drain-Source Diode Characteristics and Maximum Ratings						
Continuous Source Current	I_s	$V_{\text{G}}=V_{\text{D}}=0\text{V}$, Force Current	---	---	-10	A
Pulsed Source Current	I_{sm}		---	---	-20	A
Diode Forward Voltage	V_{SD}	$V_{\text{GS}}=0\text{V}, I_{\text{S}}=-1\text{A}, T_J=25^\circ\text{C}$	---	---	-1	V

Note:

1. Repetitive Rating: Pulsed width limited by maximum junction temperature.
2. $V_{\text{DD}}=-25\text{V}, V_{\text{GS}}=-10\text{V}, L=0.1\text{mH}, I_{\text{AS}}=-18\text{A}, R_{\text{G}}=25\Omega$, Starting $T_J=25^\circ\text{C}$.
3. The data tested by pulsed, pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
4. Essentially independent of operating temperature.

Typical Electrical and Thermal Characteristic Curves

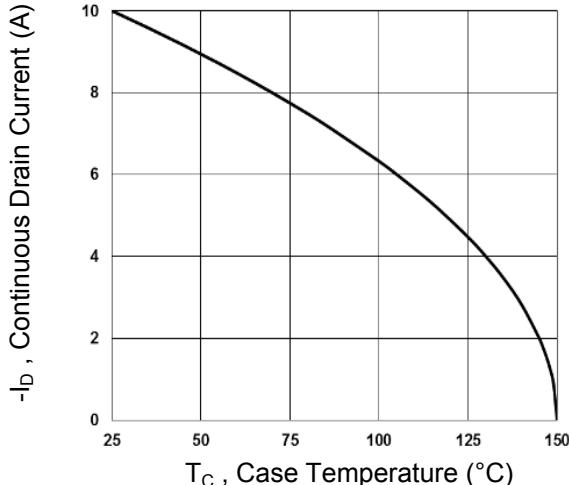


Fig.1 Continuous Drain Current vs. T_C

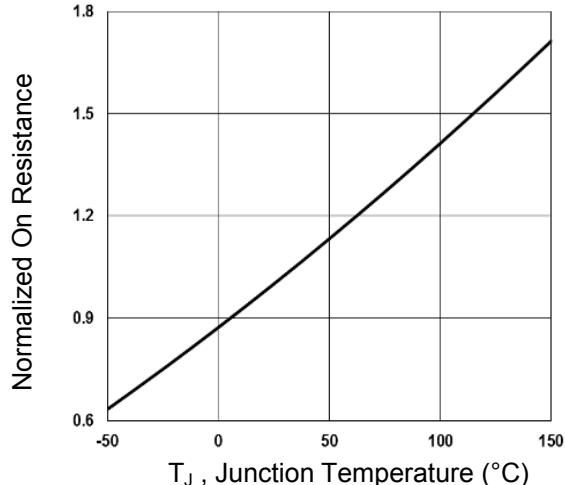


Fig.2 Normalized $R_{DS(ON)}$ vs. T_J

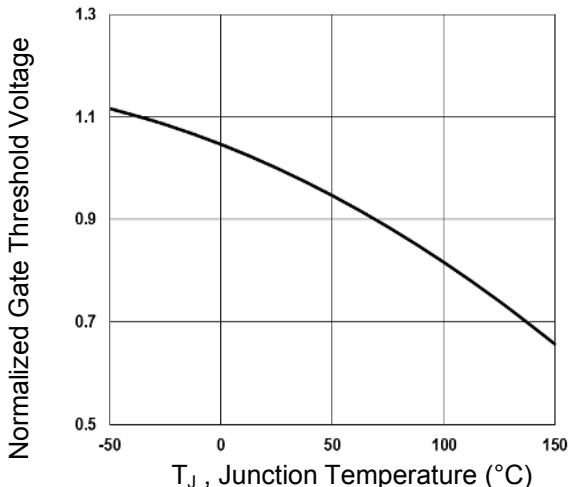


Fig.3 Normalized V_{th} vs. T_J

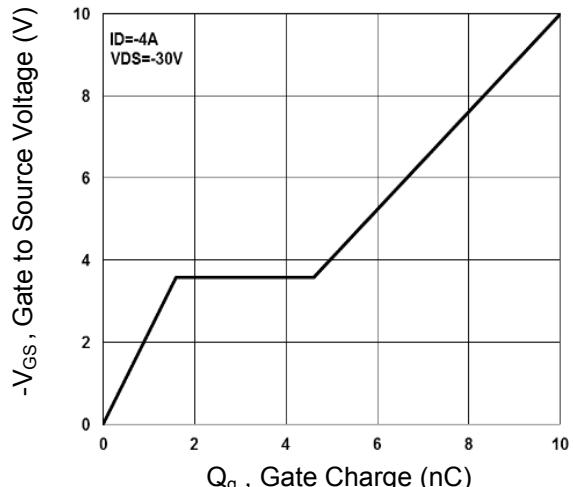


Fig.4 Gate Charge Waveform

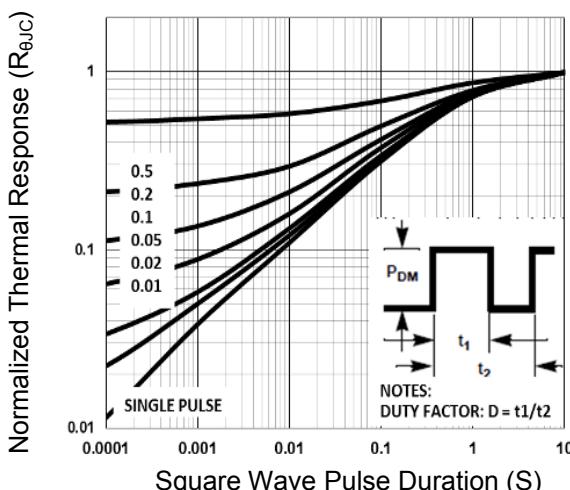


Fig.5 Normalized Transient Impedance

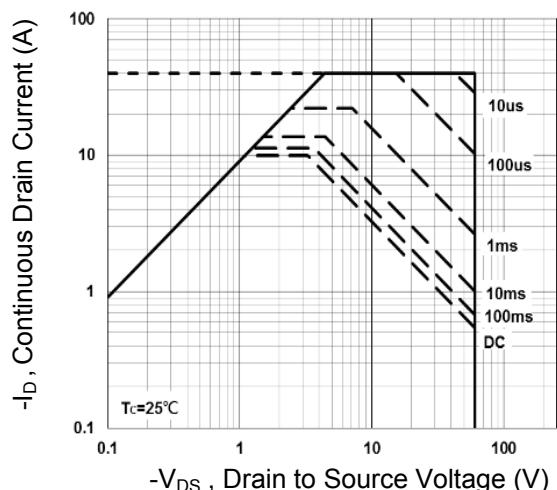


Fig.6 Maximum Safe Operation Area

Typical Electrical and Thermal Characteristic Curves

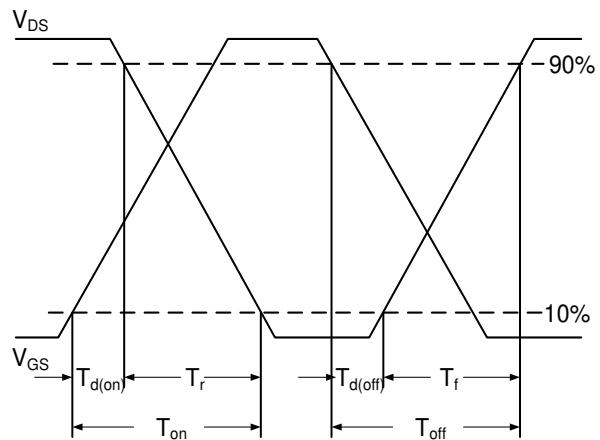


Fig.7 Switching Time Waveform


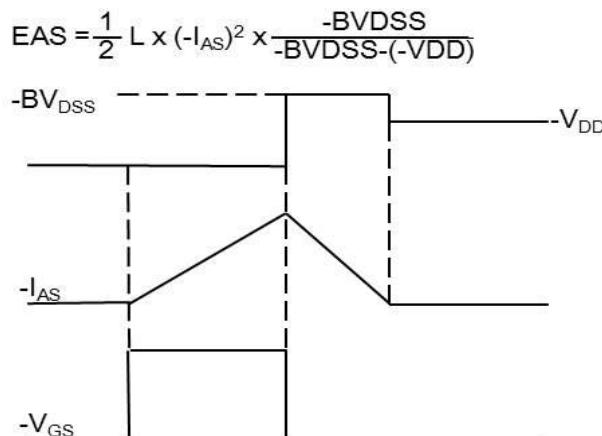


Fig.8 E_{AS} Waveform

Package Outline Dimensions

TO-252 (DPAK)

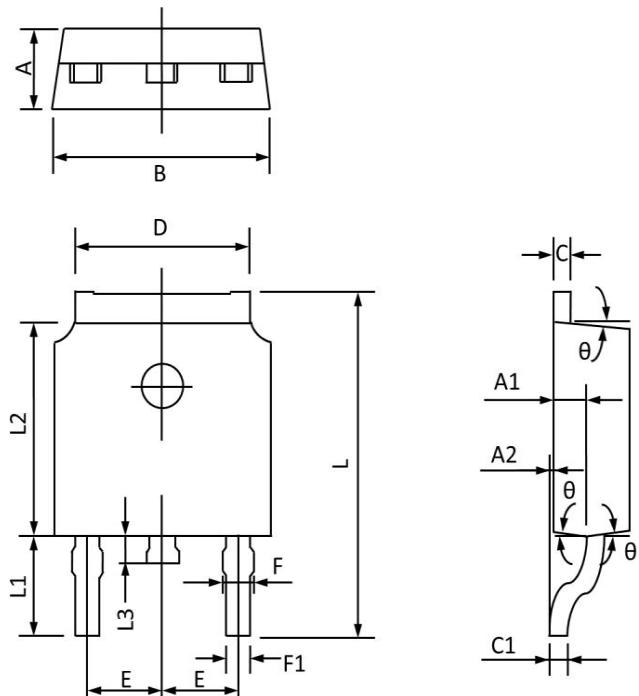

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	2.400	2.200	0.094	0.087
A1	1.110	0.910	0.044	0.036
A2	0.150	0.000	0.006	0.000
B	6.800	6.400	0.268	0.252
C	0.580	0.450	0.023	0.018
C1	0.580	0.460	0.023	0.018
D	5.500	5.100	0.217	0.201
E	2.386	2.186	0.094	0.086
F	0.940	0.600	0.037	0.024
F1	0.860	0.500	0.034	0.020
L	10.400	9.400	0.409	0.370
L1	3.000	2.400	0.118	0.094
L2	6.200	5.400	0.244	0.213
L3	1.200	0.600	0.047	0.024
θ	9°	3°	9°	3°