



0.40mm (.016") Pitch HDMI* Type D Micro Connectors

Molex leads the industry as the first manufacturer of the HDMI Micro Type D connector, the world's smallest standard I/O interconnect to deliver high-definition video and images from digital cameras and mobile devices to flat-panel screens

Molex's HDMI Type D Micro connector is the hand-held industry's smallest, commoditized I/O solution for consumer electronics and portable hand-held device makers worldwide. Developed by the HDMI Consortium, the new HDMI connector standard was designed to meet growing demands of high-definition (HD) and high-resolution content of the digital still camera, mobile and smart phone markets. Based on a single digital connection, the new technology supports transfer and viewing of HD videos, very high-resolution photos, and downloaded HD content from these handheld devices onto large HD displays. The current Type C (Mini) HDMI connector is too large to support the newer and more compact designs of such handheld devices.

Molex was chosen to lead in the HDMI Type D connector development and proposal of the connector design and specification, making it the first connector manufacturer to offer a complete solution to early adopters of this new technology.

The Molex HDMI Type D Micro connector meets all mechanical and electrical requirements of the HDMI 1.4 Specification and is only half the size of the current Type C (Mini) connector. It offers significant space-saving and real estate advantages and is the industry's only I/O solution that allows customers to surpass HD consumer demand. Despite its smaller size, the new Type D connector delivers equivalent mechanical strength and electrical characteristics of its larger Type C predecessor.


Molex's HDMI Type D I/O interconnect family of products include SMT receptacles of three different mount designs, Category 2 HDMI Type D-to-Type A cable assemblies with a variety of cable lengths and wire gauge options, and a HDMI Type D Plug-to-Type A Receptacle adapter cable. For more information, visit our website at www.molex.com.

46765

SMT Right Angle Receptacles

68786

Type D-to-Type A Cable Assemblies and Cable Adapter

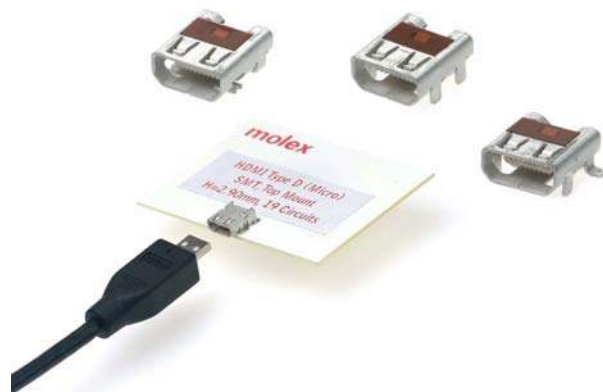

FEATURES	BENEFITS
<ul style="list-style-type: none"> Satisfy HDMI 1.4 Specification mechanical and electrical requirements 	<ul style="list-style-type: none"> Customers enjoy all features and benefits of the HDMI 1.4 Specification
<ul style="list-style-type: none"> 0.40mm (.016") pitch dual-row receptacle 	<ul style="list-style-type: none"> Half the size of the current Type C (Mini) HDMI receptacle
<ul style="list-style-type: none"> 5,000 mating cycles for receptacles 	<ul style="list-style-type: none"> Meets durability requirements for mobile applications
<ul style="list-style-type: none"> Full SMT, through hole and hybrid shell options available 	<ul style="list-style-type: none"> Offers multiple PCB mounting configurations and flexibility to suit customer applications and design requirements
<ul style="list-style-type: none"> Friction lock on receptacle shell 	<ul style="list-style-type: none"> Offers excellent retention force and tactile feel when mating
<ul style="list-style-type: none"> Rear receptacle-shell-over-housing design 	<ul style="list-style-type: none"> Prevents damage to PCB receptacle from over-insertion of the cable plug
<ul style="list-style-type: none"> Receptacle terminal hold-down feature 	<ul style="list-style-type: none"> Prevents terminal stubbing

SPECIFICATIONS (Receptacles)

Reference Information
 Packaging: Embossed Tape on Reel
 Mates With: Series 68786 HDMI Type D-to-Type A Cable Assemblies and Adapter Cable
 Designed In: mm

Electrical
 Voltage (max.): 30V
 Current (max.): 0.8A at 25°C
 Contact Resistance (max.): 10 milliohms
 Dielectric Withstanding Voltage:
 Unmated: 250V AC (rms)
 Mated: 150V AC (rms)
 Insulation Resistance:
 Unmated: 100 Megaohms min.
 Mated: 10 Megaohms min.

Mechanical
 Mating Force (max.): 44.1N
 Unmating Force (min.): 5N initial
 Durability: 5,000 cycles

Physical
 Housing: LCP, 30% Glass-filled
 Contact: Brass Alloy
 Plating:
 Contact Area — 0.76µm (30µ") Gold
 Solder Tail Area — 0.05µm (2µ") Gold Flash
 Underplating — 2.00µm (80µ") Nickel
 Operating Temperature: -30 to +85°C

SPECIFICATIONS (Cable Assemblies)

Reference Information
 Mates With: Series 46765 HDMI Type D Micro Connectors and Molex HDMI Type A Connectors

Electrical
 Cable Impedance : 100 ohms ± 15%
 Propagation Delay (max.): 2.42ns per cable

Mechanical
 Cable Flex: 100 cycles in each of two planes
 Wrenching Strength: 0-20N (Plug or Receptacle) (Mated Connectors) 20-40N (Receptacle)
 Cable Pull-out Force (min.): 40N

Physical
 Operating Temperature: 0 to +50°C

*High Definition Multimedia Interface and HDMI are trademarks of HDMI Licensing, LLC.


MARKETS AND APPLICATIONS



0.40mm (.016") Pitch HDMI Type D Micro Connectors

Regional Markets, Applications

- Mobile phones
- Smart phones
- Compact handheld devices that can record, store and play digital video
- Car Navigation
- Adaptors and Peripherals
- Ethernet Channel

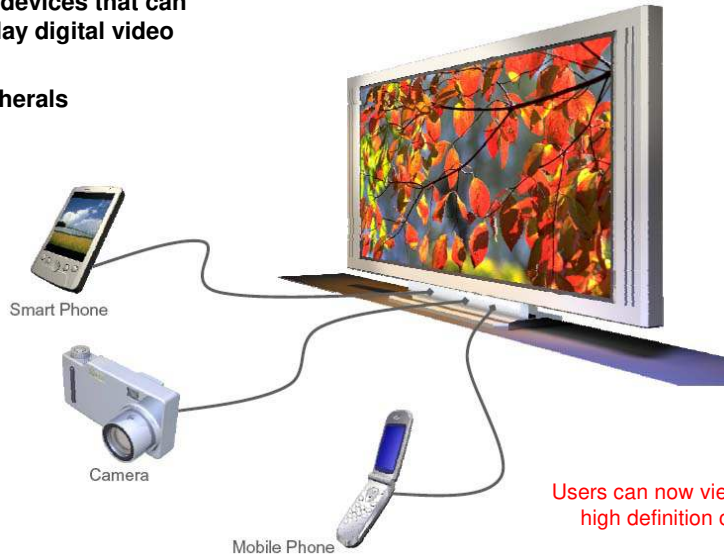

Users can now view high resolution photos and downloaded high definition content on large high definition displays

46765

SMT Right Angle Receptacles

68786

Type D-to-Type A Cable Assemblies and Adapter Cable

ORDERING INFORMATION

Connectors

Order No.	Mounting Configurations	Description
46765-0001	SMT	0.40mm (.016") Pitch HDMI* Type D Micro Connector, Right Angle Receptacle, SMT, with Kapton Tape, 19 Circuits, Lead free
46765-1001	SMT with through hole shell tabs	0.40mm (.016") Pitch HDMI* Type D Micro Connector, Right Angle Receptacle, SMT, with Through Hole Shell Tabs and Kapton Tape, 19 Circuits, Lead free
46765-2001	Hybrid SMT (with both vertical and horizontal shell tabs)	0.40mm (.016") Pitch HDMI* Type D Micro Connector, Right Angle Receptacle, SMT, Hybrid Type Mount, with Kapton Tape, 19 Circuits, Lead free

Cable Assemblies

Order No.	AWG	Cable Length (mm)	Description
68786-0001	34	1000	HDMI Type D-to-Type A Cable Assembly, CAT 2, AWG 34, 1.0m (3.28'), Lead free
68786-0002	34	1500	HDMI Type D-to-Type A Cable Assembly, CAT 2, AWG 34, 1.5m (4.92'), Lead free
68786-0003	32	2000	HDMI Type D-to-Type A Cable Assembly, CAT 2, AWG 32, 2.0m (6.56'), Lead free
68786-0004	34	100	HDMI Type D-to-Type A Cable Assembly, CAT 2, AWG 34, 0.1m (3.94'), Lead free
68786-0005	34	200	HDMI Type D-to-Type A Cable Assembly, CAT 2, AWG 34, 0.2m (7.87'), Lead free
68786-0006	36	1500	HDMI Type D-to-Type A Cable Assembly, CAT 2, AWG 36, 1.5m (4.92'), Lead free
68786-0007	32	200	HDMI Type D Plug-to-HDMI Type A Receptacle Cable Adapter, CAT 2, AWG 32, 0.2m (7.87'), Lead free

Remarks: For custom requirements of Micro HDMI cable assemblies, please contact a Molex sales person

: Molex HDMI cable assemblies with HEAC (HDMI Ethernet and Audio Return Channel) are available if required. Speak to a Molex sales person for any applications requiring this.

