


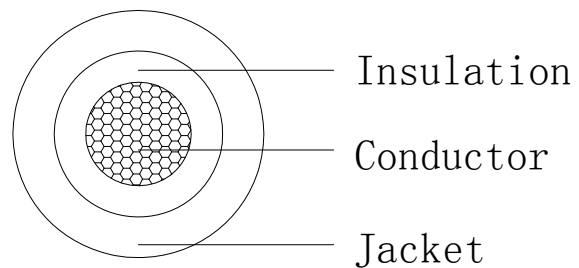
# CnC Tech

## CABLE SPECIFICATION

<b>Style</b>	<b>50618-4.0-1-1000-1-TS</b>		
<b>Spec.</b>	<b>H1Z2Z2-K 1×4.0mm<sup>2</sup></b>		<b>/</b>
	<b>29AC11061BK002</b>	<b>Version</b>	<b>A0</b>
	Item	Unit	Specification
	Awg	mm <sup>2</sup>	4
	No. of conductor	p,c	1C
Conductor	Material	---	Tinned Copper
	Construction	No./mm	56/0.285±0.008
	Stranded diameter)	mm	2.46(Ref.)
Insulation	Material	---	XLPE
	Nom. Thickness	mm	0.97(Ref.)
	Diameter	mm	4.40±0.15
	Color	---	White
Jacket	Material	---	XLPE
	Min. Thickness	mm	0.80
	Nom. Thickness	mm	0.85(Ref.)
	O.D	mm	6.10±0.15
	Color	---	Black
Marking	 <b>TÜV H1Z2Z2-K 1×4.0mm<sup>2</sup> -40°C to +90°C DC 1500V</b>		
	Height : 1.5 FONT : F1		

### Configuration:

- 1.Compliant with TUV EN50618.
- 2.Working Temp -40°C~+90°C.
- 3.Irradiation 8~12Mard
- 4.1000FT/Reel



**Sectional view**

RATIFY	<i>Xuqiyou</i>	APPROVED	/	DESIGN	<i>Zhuoqing</i>
--------	----------------	----------	---	--------	-----------------